


2.54mm PITCH SINGLE ROW SOCKET

P.C.B MOUNT STRAIGHT DIP TYPE (PLASTIC HEIGHT:9.00mm)

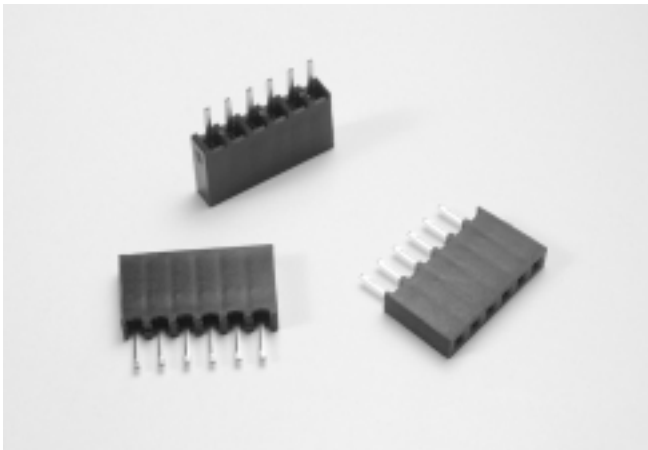


254330FS Series

Mates With SUYIN 254211, 254201, 254205 Series

Specifications:

- 1~28 Circuits
- Insulator Material : P.B.T UL94V-0
- Operating Temp. Range : -40°C To +105°C
- Terminal Material : Phosphor Bronze
- Plating : Gold Plated
- Max. Current Rating : 1.5A
- Max. Voltage Rating : 250V AC
- Dielectric Strength : 500V AC (Min. 60 Seconds)

2.54 mm

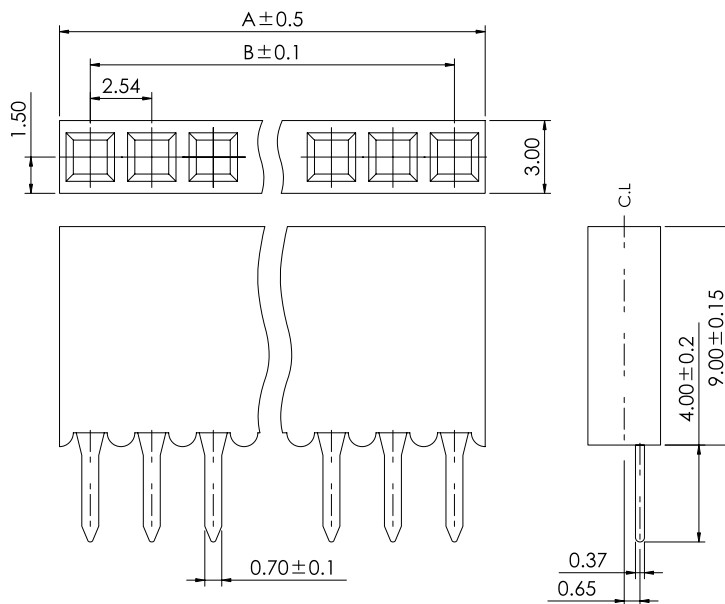

Order Information


254330FS□□□□00ZU
1 2 3 4 5

1. 'S' : Straight DIP Type
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package

'U' : Tube Package Without CAP

Reference Page 11

Recommended P.C.B. Layout

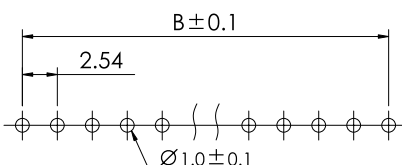

Dimension Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
254330FS001□□00ZU	3.14		254330FS015□□00ZU	38.70	35.56
254330FS002□□00ZU	5.68	2.54	254330FS016□□00ZU	41.24	38.10
254330FS003□□00ZU	8.22	5.08	254330FS017□□00ZU	43.78	40.64
254330FS004□□00ZU	10.76	7.62	254330FS018□□00ZU	46.32	43.18
254330FS005□□00ZU	13.30	10.16	254330FS019□□00ZU	48.86	45.72
254330FS006□□00ZU	15.84	12.70	254330FS020□□00ZU	51.40	48.26
254330FS007□□00ZU	18.38	15.24	254330FS021□□00ZU	53.94	50.80
254330FS008□□00ZU	20.92	17.78	254330FS022□□00ZU	56.48	53.34
254330FS009□□00ZU	23.46	20.32	254330FS023□□00ZU	59.02	55.88
254330FS010□□00ZU	26.00	22.86	254330FS024□□00ZU	61.56	58.42
254330FS011□□00ZU	28.54	25.40	254330FS025□□00ZU	64.10	60.96
254330FS012□□00ZU	31.08	27.94	254330FS026□□00ZU	66.64	63.50
254330FS013□□00ZU	33.62	30.48	254330FS027□□00ZU	69.18	66.04
254330FS014□□00ZU	36.16	33.02	254330FS028□□00ZU	71.72	68.58