








1.5mm WAFER SMT & SMT R/A TYPE

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 350V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 6T,UL94V-0
Color: Natural(Beige)

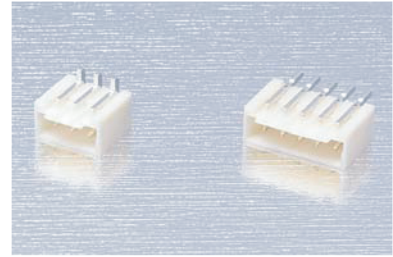

PART NO.	Dimensions	
	A	B
1501MS-02TW-U	1.50	4.30
1501MS-03TW-U	3.00	5.80
1501MS-04TW-U	4.50	7.30
1501MS-05TW-U	6.00	8.80
1501MS-06TW-U	7.50	10.30
1501MS-07TW-U	9.00	11.80
1501MS-08TW-U	10.50	13.30
1501MS-09TW-U	12.00	14.80
1501MS-10TW-U	13.50	16.30
1501MS-11TW-U	15.00	17.80
1501MS-12TW-U	16.50	19.30
1501MS-13TW-U	18.00	20.80
1501MS-14TW-U	19.50	22.30
1501MS-15TW-U	21.00	23.80


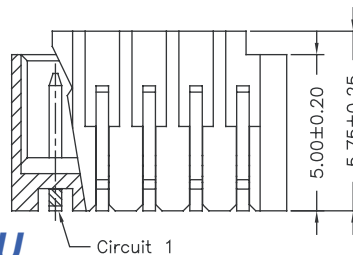




Part No.:1501MS-XXTW-U

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 350V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 6T,UL94V-0
Color: Natural(Beige)

PART NO.	Dimensions	
	A	B
1501MR-02TW-U	1.50	4.30
1501MR-03TW-U	3.00	5.80
1501MR-04TW-U	4.50	7.30
1501MR-05TW-U	6.00	8.80
1501MR-06TW-U	7.50	10.30
1501MR-07TW-U	9.00	11.80
1501MR-08TW-U	10.50	13.30
1501MR-09TW-U	12.00	14.80
1501MR-10TW-U	13.50	16.30
1501MR-11TW-U	15.00	17.80
1501MR-12TW-U	16.50	19.30
1501MR-13TW-U	18.00	20.80
1501MR-14TW-U	19.50	22.30
1501MR-15TW-U	21.00	23.80

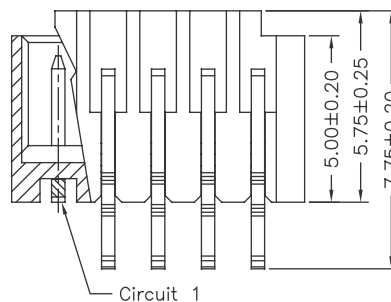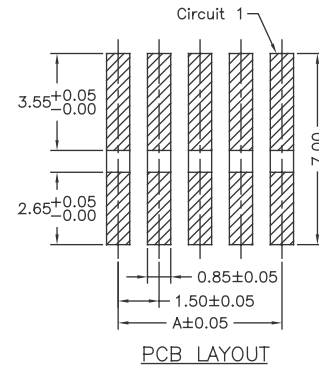

Part No.:1501MR-XXTW-U