

Crystal Clock Oscillator

2765E Series

EMI Noise-reducing Type

Model name

2765E Overall frequency tolerance of $\pm 100 \times 10^{-6}$.

Application

- For compact mobile information equipment, such as PDA and notebook PC

Features

- With a spread spectrum function installed, this crystal oscillator effectively reduces EMI noise.
- Down-spreading and center-spreading.
- With a standby function installed, power consumption is reduced.

Pb Free

RoHS Compliant
Directive 2011/65/EU




Absolute maximum rating
Supply voltage (V_{DD}) -0.5 to +7.0 V
Storage temperature range -55 to +125 °C

Specifications


Item	Model	2765E
Output level		CMOS
Nominal frequency range *1	(MHz)	$40 \leq F \leq 80$
Operating temperature range *2	(°C)	-20 to +70
Overall frequency tolerance	($\times 10^{-6}$)	± 100
Supply voltage [V_{DD}]	(V)	$+3.3 \pm 0.3$
Current consumption (+3.3 V, 25 °C) max	During operation	(mA) 30
	During standby	(μ A) 30
V_{OL} max/ V_{OH} min	(V)	$0.2 V_{DD}/0.8 V_{DD}$
T_r max/ T_f max	(ns)	5/5 ($0.2 V_{DD}$ to $0.8 V_{DD}$)
Symmetry min. to max.	(%)	40 to 60 (at $1/2 V_{DD}$)
Load (C_L) max	(pF)	15
Start-up time max	(ms)	10
Standby function		Available (tristate)
Number for specifying an order		NSA3393A

*1: If you require a product with a frequency not given above, please contact us. *2: If you require a product with an operating temperature range not given above, please contact us.

Dimensions

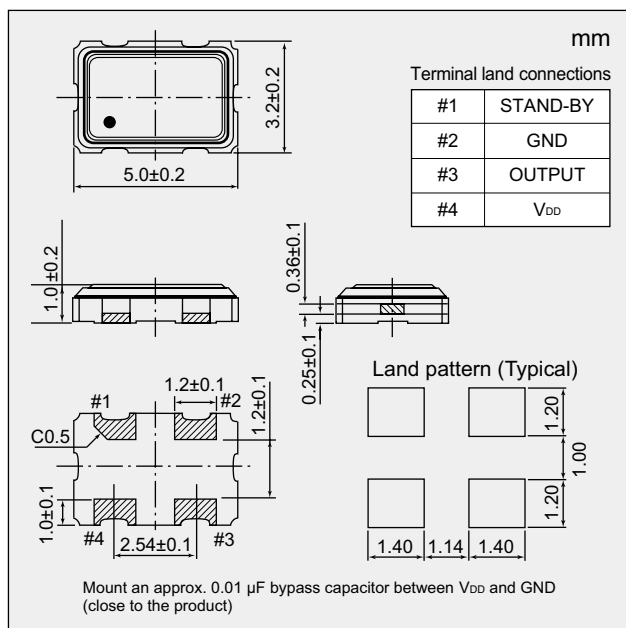

Output Waveform <CMOS>

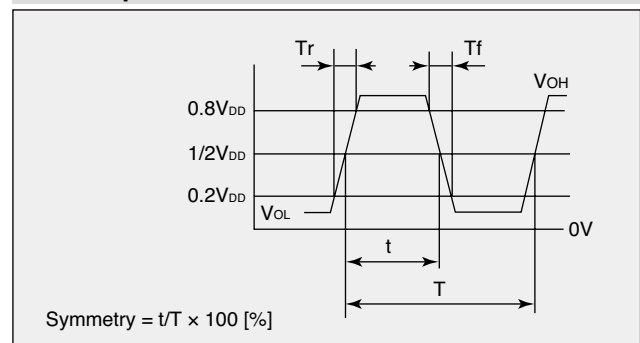

Spread Spectrum Characteristics

Spreading Type	Spreading Ratio
Center spreading	± 1.0 %

Standby Function

#1 Input	#3 Output
Level H ($0.7 V_{DD} \leq V_{IH} \leq V_{DD}$) or OPEN is selected.	Oscillation output ON
Level L ($V_{IL} \leq 0.3 V_{DD}$) is selected.	High impedance

How to Specify an Order

When ordering our products, specify them with an "Ordering Code" that consists of the following: Example : When ordering a product with model name: 2765E, frequency: 40 MHz, overall frequency tolerance: $\pm 100 \times 10^{-6}$, and supply voltage: 3.3 V
 Model name – [Frequency (up to 9 digits)] M – [Number for specifying an order]
 Ordering Code: 2765E – 40.000000M – NSA3393A

If you have any queries concerning our standard frequencies and numbers for specifying orders, please contact our sales representatives or visit our homepage (<http://www.ndk.com/>).