

---

# HVM11

Variable Capacitance Diode for BS/CS tuner

## HITACHI

ADE-208-081A (Z)

Preliminary

Rev. 1

May. 1993

---


### Features

- Low capacitance, high S/N.
- MPAK package is suitable for high density surface mounting and high speed assembly.

### Ordering Information

Type No.	Laser Mark	Package Code
HVM11	T4	MPAK

### Pin Arrangement

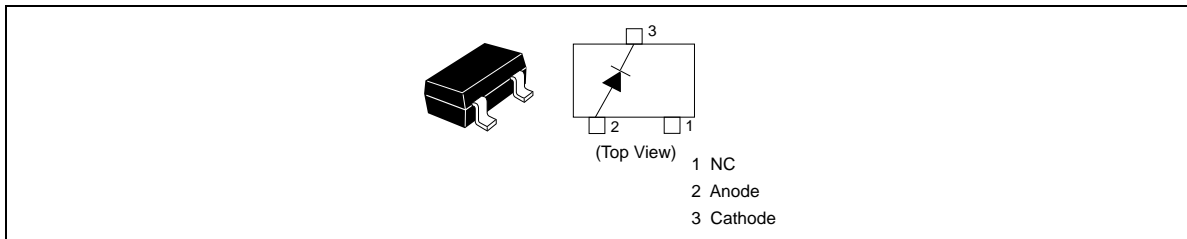

### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Item	Symbol	Value	Unit
Reverse voltage	$V_R$	35	V
Junction temperature	$T_j$	125	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55 to +125	$^\circ\text{C}$

# HVM11

## Electrical Characteristics (Ta = 25°C)

Item	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse voltage	$V_R$	35	—	—	V	$I_R = 10\mu\text{A}$
Reverse current	$I_R$	—	—	50	nA	$V_R = 30\text{V}$
Capacitance	$C_1$	3.6	—	5.6	pF	$V_R = 1\text{V}, f = 1\text{MHz}$
	$C_{30}$	0.5	—	0.9		$V_R = 30\text{V}, f = 1\text{MHz}$
Capacitance ratio	n	4.0	—	—	—	$C_1/C_{30}$
Series resistance	$r_s$	—	—	1.5	$\Omega$	$V_R = 2\text{V}, f = 100\text{MHz}$

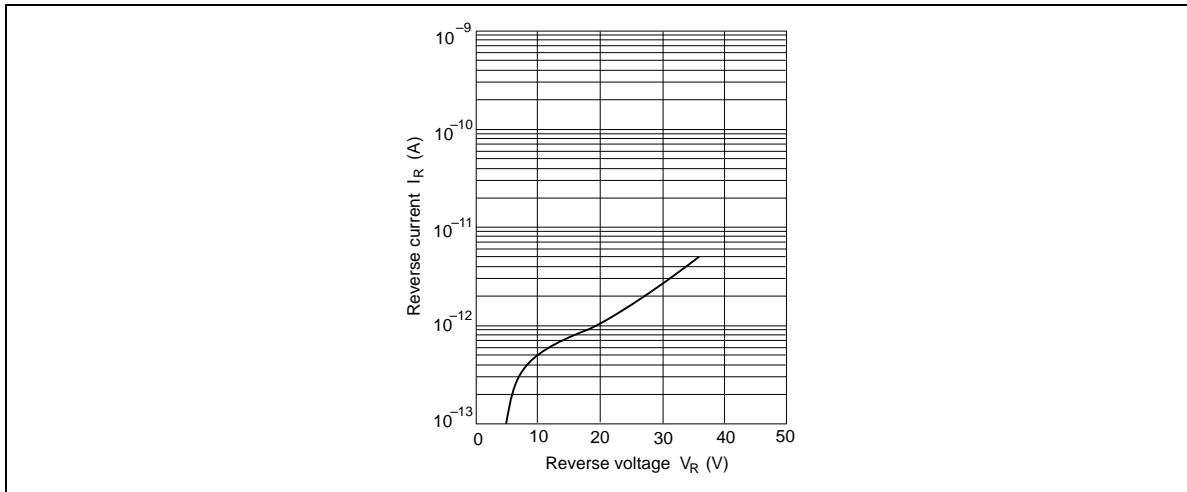


Fig.1 Reverse current Vs. Reverse voltage

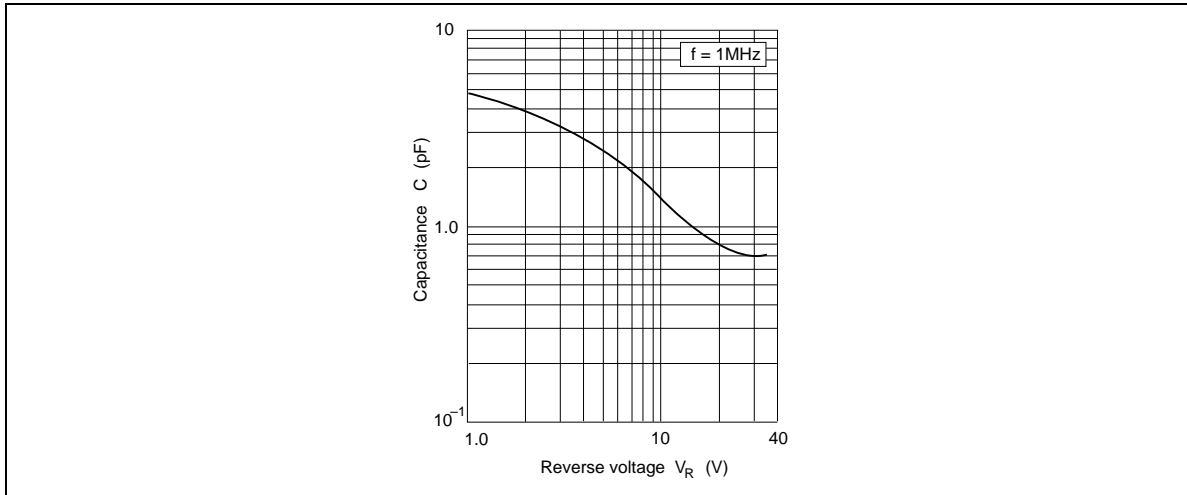


Fig.2 Capacitance Vs. Reverse voltage

Package Dimensions

