


Ordering Information & Dimensions

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
A2016H-N-2X02P-D	2.00	4.20	A2016H-N-2X14P-D	26.00	28.20
A2016H-N-2X03P-D	4.00	6.20	A2016H-N-2X15P-D	28.00	30.20
A2016H-N-2X04P-D	6.00	8.20	A2016H-N-2X16P-D	30.00	32.20
A2016H-N-2X05P-D	8.00	10.20	A2016H-N-2X17P-D	32.00	34.20
A2016H-N-2X06P-D	10.00	12.20	A2016H-N-2X18P-D	34.00	36.20
A2016H-N-2X07P-D	12.00	14.20	A2016H-N-2X19P-D	36.00	38.20
A2016H-N-2X08P-D	14.00	16.20	A2016H-N-2X20P-D	38.00	40.20
A2016H-N-2X09P-D	16.00	18.20	A2016H-N-2X21P-D	40.00	42.20
A2016H-N-2X10P-D	18.00	20.20	A2016H-N-2X22P-D	42.00	44.20
A2016H-N-2X11P-D	20.00	22.20	A2016H-N-2X23P-D	44.00	46.20
A2016H-N-2X12P-D	22.00	24.20	A2016H-N-2X24P-D	46.00	48.20
A2016H-N-2X13P-D	24.00	26.20	A2016H-N-2X25P-D	48.00	50.20

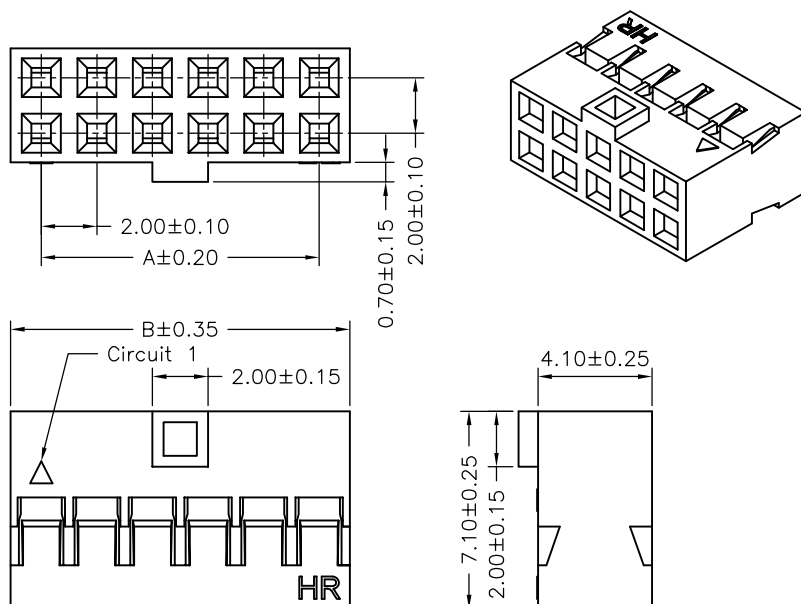

SPECIFICATIONS

Current Rating: 2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Black

				JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.			
UNIT	SCALE	SHEET	TITLE:				
mm		1 of 1	2.00mm PITCH DUAL ROW HOUSING WITH NOSE				
DRAWN BY	APPROVED BY					DRAW NO.:	
李勤	董正一					A2016H-N-2XNP-D	
2007.01.30	2007.01.30					REV. A0	
GENERAL TOLERANCE			REV. A0				
X. X±0.25			ANGLE±				
X. XX±0.15							
X. XXX±0.05							
AO	NEW RELEASE	2007.01.30					
REV.	DESCRIPTION	DATE					