

Features :

- * Low-power consumption.
 - active: 30mA I_{cc} at 55ns.
 - stand by :
 - 10 μA (CMOS input / output , LL)
 - 2 μA (CMOS input / output, SL)
- * Single +2.7V to 3.6V power supply.
- * Equal access and cycle time.
- * 55\70\85 ns access time.
- * Tri-state output.
- * Automatic power-down when deselected.
- * Multiple center power and ground pins for improved noise immunity.
- * Individual byte controls for both read and write cycles.
- * Industrial grade (-40°C ~ 85°C) available.
- * Available in 48-fpBGA/44L TSOPII.

Description :


The GLT6200L16 is a low power CMOS Static RAM organized as 131,072 words by 16 bits. Easy memory expansion is provided by an active LOW $\overline{CE1}$ and \overline{OE} pin.

This device has an automatic power – down mode feature when deselected. Separate Byte Enable controls (\overline{BLE} and \overline{BHE}) allow individual bytes to be accessed. \overline{BLE} controls the lower bits I/O0 – I/O7. \overline{BHE} controls the upper bits I/O8 – I/O15.

Writing to these devices is performed by taking Chip Enable $\overline{CE1}$ with Write Enable \overline{WE} and byte Enable (\overline{BLE} / \overline{BHE}) Low


Reading from the device is performed by taking Chip Enable $\overline{CE1}$ with Output enable \overline{OE} and byte Enable (\overline{BLE} / \overline{BHE}) Low while Write Enable \overline{WE} are held HIGH.

Function Block Diagram :

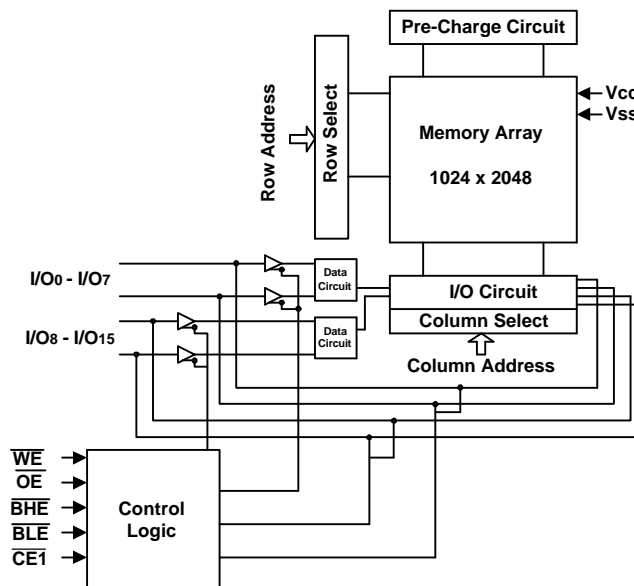


Pin Configurations :


GLT6200L16

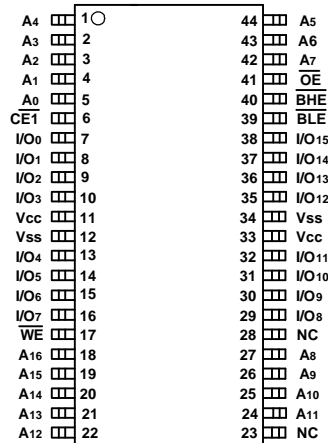

48 Ball fpBGA :

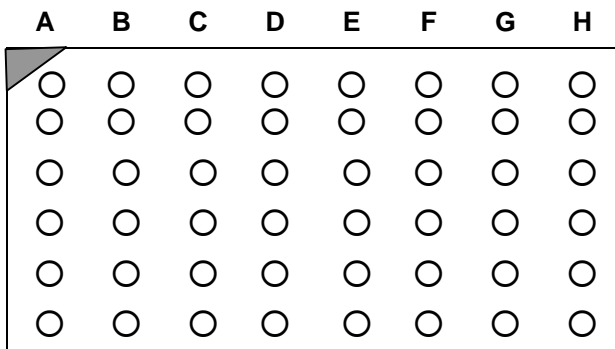

Bottom View

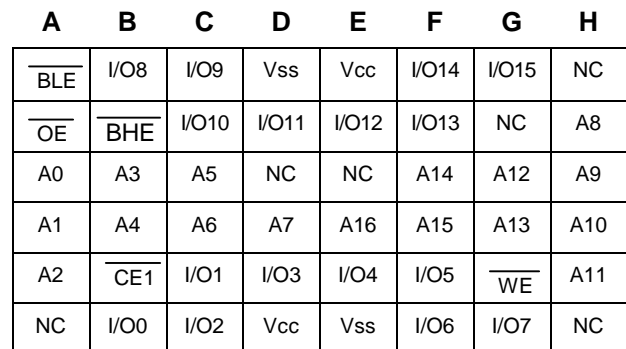

Bottom View

Note : NC means no Ball.

Pin Descriptions:

Name	Function
A ₀ – A ₁₆	Address Inputs
CE ₁	Chip Enable Input
OE	Output Enable Input
WE	Write Enable Input
I/O ₀ – I/O ₁₅	Data Input and Data Output
V _{CC}	2.7V~3.6V Power Supply
BLE	Lower Byte Enable Input (I/O ₀ to I/O ₇)
BHE	Higher Byte Enable Input (I/O ₈ to I/O ₁₅)
GND	Ground
NC	No Connection

Truth Table:

CE1	OE	WE	BLE	BHE	I/O0-I/O7	I/O8-I/O15	Power	Mode
H	X	X	X	X	High-Z	High-Z	Standby	Deselected
X	X	X	H	H	High-Z	High-Z	Standby	Deselected
L	H	H	L	X	High-Z	High-Z	Active	Output Disabled
L	H	H	X	L	High-Z	High-Z	Active	Output Disabled
L	L	H	L	H	Data Out	High-Z	Active	Lower Byte Read
L	L	H	H	L	High-Z	Data Out	Active	Upper Byte Read
L	L	H	L	L	Data Out	Data Out	Active	Word Read
L	X	L	L	H	Data In	High-Z	Active	Lower Byte Write
L	X	L	H	L	High-Z	Data In	Active	Upper Byte Write
L	X	L	L	L	Data In	Data In	Active	Word Write

Note ; X means don care. (Must be low or high state).

Absolute Maximum Ratings*

Parameter	Symbol	Minimum	Maximum	Unit
Voltage on Any Pin Relative to Gnd	Vt	-0.5	Vcc + 0.3	V
Power Dissipation	P _T	-	1.0	W
Storage Temperature (Plastic)	Tstg	-55	+150	°C
Temperature Under Bias	Tbias	-25	+85	°C

*Note : Stresses greater than those listed above Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any conditions outside those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Recommended Operating Conditions (TA = -25°C to 85°C)

Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	V _{CC}	2.7	3	3.6	V
	Gnd	0.0	0.0	0.0	V
Input Voltage	V _{IH}	2.2	-	V _{CC} +0.2	V
	V _{IL}	-0.5*	-	0.6	V

* V_{IL} min = -2.0V for pulse width less than t_{RC}/2.


DC Operating Characteristics ($V_{CC}=2.7$ to $3.6V$, $T_A = -25^{\circ}C$ to $85^{\circ}C$)

Parameter	Sym.	Test Conditions	55		70		85		Unit
			Min	Max	Min	Max	Min	Max	
Input Leakage Current	$ I_{LI} $	$V_{CC} = \text{Max}, V_{IN} = \text{Gnd to } V_{CC}$		1		1		1	μA
Output Leakage Current	$ I_{LOI} $	$\overline{CE1} = V_{IH}$ or $V_{CC} = \text{Max}, V_{OUT} = \text{Gnd to } V_{CC}$		1		1		1	μA
Operating Power Supply Current	I_{CC}	$\overline{CE1} = V_{IL}, V_{IN}=V_{IH}$ or $V_{IL}, I_{OUT}=0$		5		5		5	mA
Average Operating Current	I_{CC1}	$I_{OUT} = 0\text{mA}, \text{Min Cycle, } 100\% \text{ Duty}$		30		30		25	mA
	I_{CC2}	$\overline{CE1} \leq 0.2V, I_{OUT} = 0\text{mA}, \text{Cycle Time}=1\mu s, 100\% = \text{Duty}$		3		3		3	mA
Standby Power Supply Current(TTL Level)	I_{SB}	$\overline{CE1} = V_{IH}$		0.5		0.5		0.5	mA
Standby Power Supply Current (CMOS Level)	I_{SB1}	$\overline{CE1} \geq V_{CC}-0.2V, V_{IN} \leq 0.2V$ or $V_{IN} \geq V_{CC}-0.2V$	GLT6200L16LL	10		10		10	μA
			GLT6200L16SL	2		2		2	μA
Output Low Voltage	V_{OL}	$I_{OL} = 2.1 \text{ mA}$		0.4		0.4		0.4	V
Output High Voltage	V_{OH}	$I_{OH} = -1 \text{ mA}$	2.4		2.4		2.4		V

Data Retention

Parameter	Sym.	Test Conditions	Min.	Max.	Unit
V_{CC} for Data retention	V_{DR}	$\overline{CE1} \geq V_{CC} - 0.2V$	1.0	-	V
Data Retention Current	I_{CCDR}	$V_{IN} \geq V_{CC} - 0.2V$ or $V_{IN} \leq 0.2V$	-	2	μA
Chip Deselect to Data Retention Time	t_{CDR}	$V_{IN} \leq 0.2V$	0	-	ns
Operating Recovery Time ⁽²⁾	t_{r}		t_{rC}	-	ns


Data Retention Waveform ($T_A = -25^{\circ}C$ to $+85^{\circ}C$)

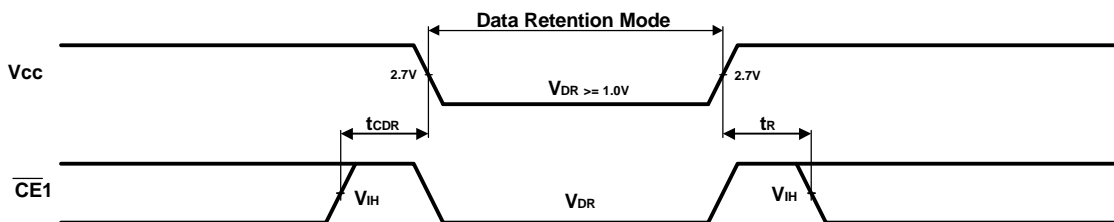

AC Test Conditions

Input Pulse Levels	0.4V to 2.4V
Input Rise and Fall Time	5 ns
Input and Output Timing Reference Level	1.4V

AC Test Loads and Waveforms




Output Load Condition
 $C_L = 30\text{pf} + 1\text{TTL Load}$

*Including Scope and Jig Capacitance


Read Cycle ⁽⁹⁾ ($V_{CC}=2.7\text{V}$ to 3.6V , $T_A = -25^\circ\text{C}$ to 85°C)

Parameter	Symbol	55		70		85		Unit	Note
		Min	Max	Min	Max	Min	Max		
Read Cycle Time	t_{RC}	55		70		85		ns	
Address Access Time	t_{AA}		55		70		85	ns	
Chip Enable Access Time	t_{ACE}		55		70		85	ns	
Output Enable Access Time	t_{OE}		35		40		40	ns	
Output Hold from address Change	t_{OH}	10		10		10		ns	
Chip Enable to Output in Low-Z	t_{LZ}	10		10		10		ns	4,5
Chip Disable to Output in High-Z	t_{HZ}		25		30		35	ns	3,4,5
Output Enable to Output in Low-Z	t_{OLZ}	5		5		5		ns	
Output Disable to Output in High-Z	t_{OHZ}		25		25		30	ns	
$\overline{\text{BLE}}$, $\overline{\text{BHE}}$ Enable to Output in Low-Z	t_{BLZ}	5		5		5		ns	4,5
$\overline{\text{BLE}}$, $\overline{\text{BHE}}$ Disable to Output in High-Z	t_{BHZ}		25		25		30	ns	3,4,5
$\overline{\text{BLE}}$, $\overline{\text{BHE}}$ Access Time	t_{BA}		35		40		85	ns	

Timing Waveform of Read Cycle 1 (Address Controlled)

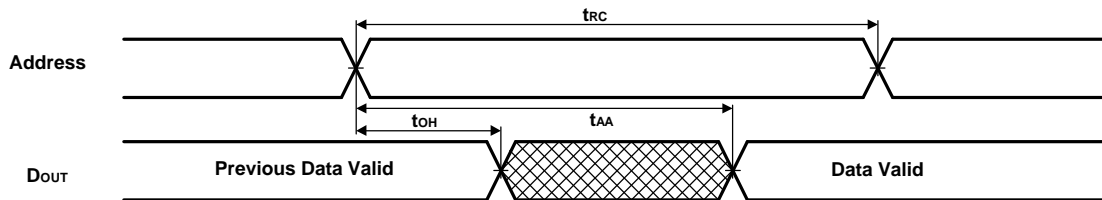


Timing Waveform of Read Cycle 2 ⁽³⁻⁵⁾

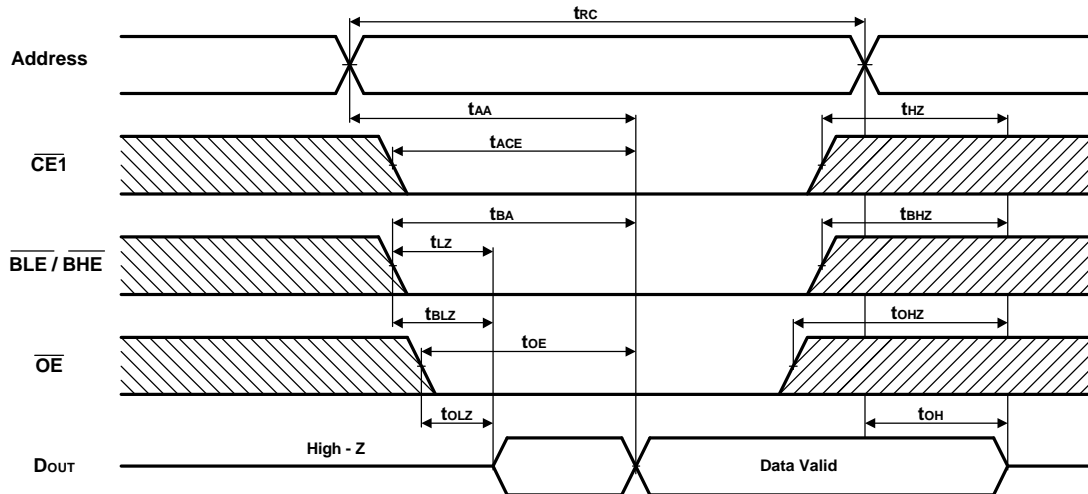


Write Cycle ⁽¹¹⁾ ($V_{CC}=2.7$ to $3.6V$, $T_A = -25^{\circ}C$ to $85^{\circ}C$)

Parameter	Symbol	55		70		85		Unit	Note
		Min	Max	Min	Max	Min	Max		
Write Cycle Time	t_{WC}	55		70		85		ns	
Chip Enable to Write End	t_{CW}	50		60		70		ns	
Address Setup to Write End	t_{AW}	50		60		70		ns	
Address Setup Time	t_{AS}	0		0		0		ns	
Write Pulse Width	t_{WP}	45		50		60		ns	
Write Recovery Time	t_{WR}	0		0		0		ns	
Data Valid to Write End	t_{DW}	25		30		35		ns	
Data Hold Time	t_{DH}	0		0		0		ns	
Write Enable to Output in High-Z	t_{WHZ}		25		30		35	ns	
Output Active from Write End	t_{OW}	5		5		5		ns	
\overline{BLE} , \overline{BHE} Setup to Write End	t_{BW}	50		60		70		ns	


Timing Waveform of Write Cycle 1 (Address Controlled)^(2-6,8)

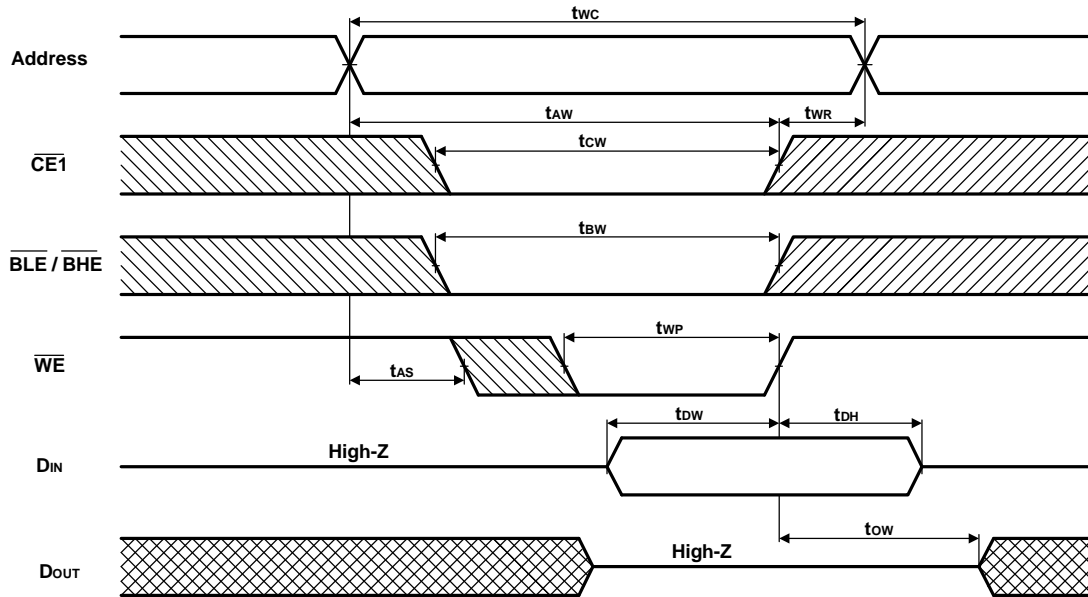

Timing Waveform of Write Cycle 2 (CE1 Controlled)^(2-6,8)

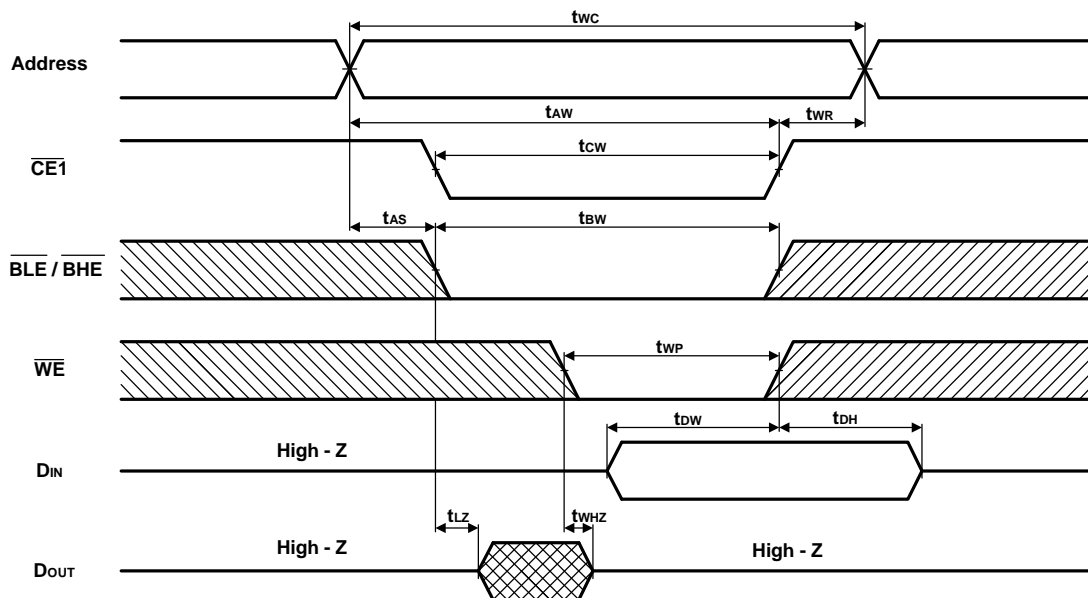

Timing Waveform of Write Cycle 4 ($\overline{\text{BLE}}$ / $\overline{\text{BHE}}$ Controlled)^(2-6,8)

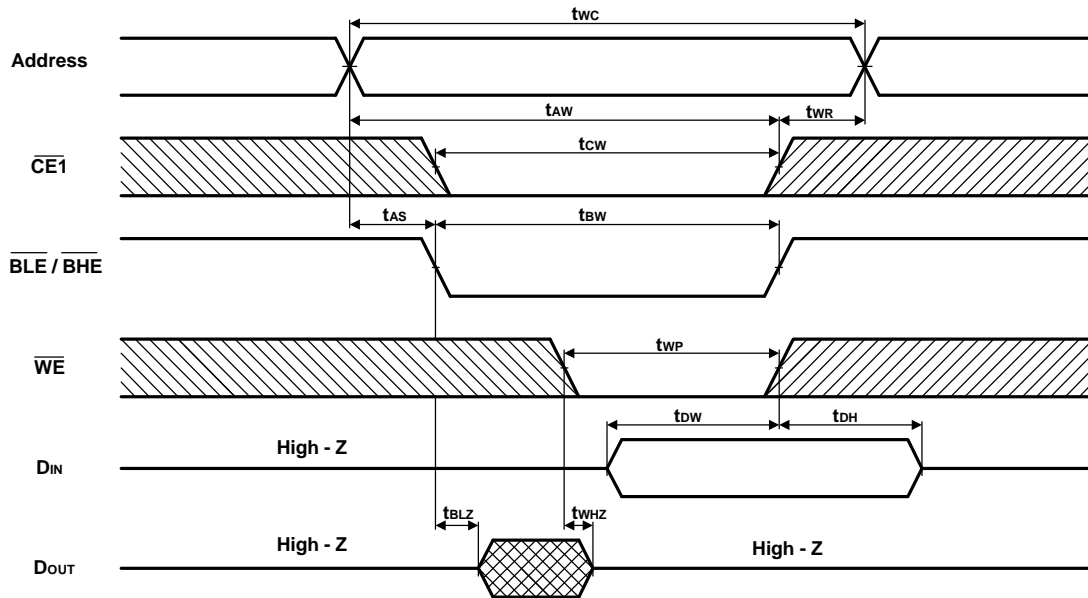



G-LINK

GLT6200L16

Ultra Low Power 128k x 16 CMOS SRAM

Feb 2004(Rev. 2.7)

Notes :

1. L-version includes this feature.
2. This Parameter is samples and not 100% tested.
3. For test conditions, see AC Test Condition.
4. This parameter is tested with $CL = 5pF$. Transition is measured $\pm 500mV$ from steady – state voltage.
5. This parameter is guaranteed, but is not tested.
6. \overline{WE} is HIGH for read cycle.
7. $\overline{CE1}$ and \overline{OE} are LOW for read cycle.
8. Address valid prior to or coincident with $\overline{CE1}$ transition LOW.
9. All read cycle timings are referenced from the last valid address to the first transition address.
10. $\overline{CE1}$ or \overline{WE} must be HIGH during address transition.
11. All write cycle timings are referenced from the last valid address to the first transition address.

G-Link Technology Corporation, Taiwan


Web : www.glink.com.tw Email : sales@glink.com.tw

TEL : 886-2-27968078

Ordering Information


Part Number	SPEED	POWER	PACKAGE
GLT6200L16LL-55TC	55ns	Normal	TSOPII 44L
GLT6200L16LL-70TC	70ns	Normal	TSOPII 44L
GLT6200L16LL-85TC	85ns	Normal	TSOPII 44L
GLT6200L16LLI-55TC	55ns	Normal	TSOPII 44L
GLT6200L16LLI-70TC	70ns	Normal	TSOPII 44L
GLT6200L16LLI-85TC	85ns	Normal	TSOPII 44L
GLT6200L16SL-55TC	55ns	Normal	TSOPII 44L
GLT6200L16SL-70TC	70ns	Normal	TSOPII 44L
GLT6200L16SL-85TC	85ns	Normal	TSOPII 44L
GLT6200L16SLI-55TC	55ns	Normal	TSOPII 44L
GLT6200L16SLI-70TC	70ns	Normal	TSOPII 44L
GLT6200L16SLI-85TC	85ns	Normal	TSOPII 44L
GLT6200L16LL-55FG	55ns	Normal	fpBGA 48L
GLT6200L16LL-70FG	70ns	Normal	fpBGA 48L
GLT6200L16LL-85FG	85ns	Normal	fpBGA 48L
GLT6200L16LLI-55FG	55ns	Normal	fpBGA 48L
GLT6200L16LLI-70FG	70ns	Normal	fpBGA 48L
GLT6200L16LLI-85FG	85ns	Normal	fpBGA 48L
GLT6200L16SL-55FG	55ns	Normal	fpBGA 48L
GLT6200L16SL-70FG	70ns	Normal	fpBGA 48L
GLT6200L16SL-85FG	85ns	Normal	fpBGA 48L
GLT6200L16SLI-55FG	55ns	Normal	fpBGA 48L
GLT6200L16SLI-70FG	70ns	Normal	fpBGA 48L
GLT6200L16SLI-85FG	85ns	Normal	fpBGA 48L
GLT6200L16LL-55FI	55ns	Normal	fpBGA 48L
GLT6200L16LL-70FI	70ns	Normal	fpBGA 48L
GLT6200L16LL-85FI	85ns	Normal	fpBGA 48L
GLT6200L16LLI-55FI	55ns	Normal	fpBGA 48L
GLT6200L16LLI-70FI	70ns	Normal	fpBGA 48L
GLT6200L16LLI-85FI	85ns	Normal	fpBGA 48L
GLT6200L16SL-55FI	55ns	Normal	fpBGA 48L
GLT6200L16SL-70FI	70ns	Normal	fpBGA 48L
GLT6200L16SL-85FI	85ns	Normal	fpBGA 48L
GLT6200L16SLI-55FI	55ns	Normal	fpBGA 48L
GLT6200L16SLI-70FI	70ns	Normal	fpBGA 48L
GLT6200L16SLI-85FI	85ns	Normal	fpBGA 48L

Parts Numbers (Top Mark) Definition :


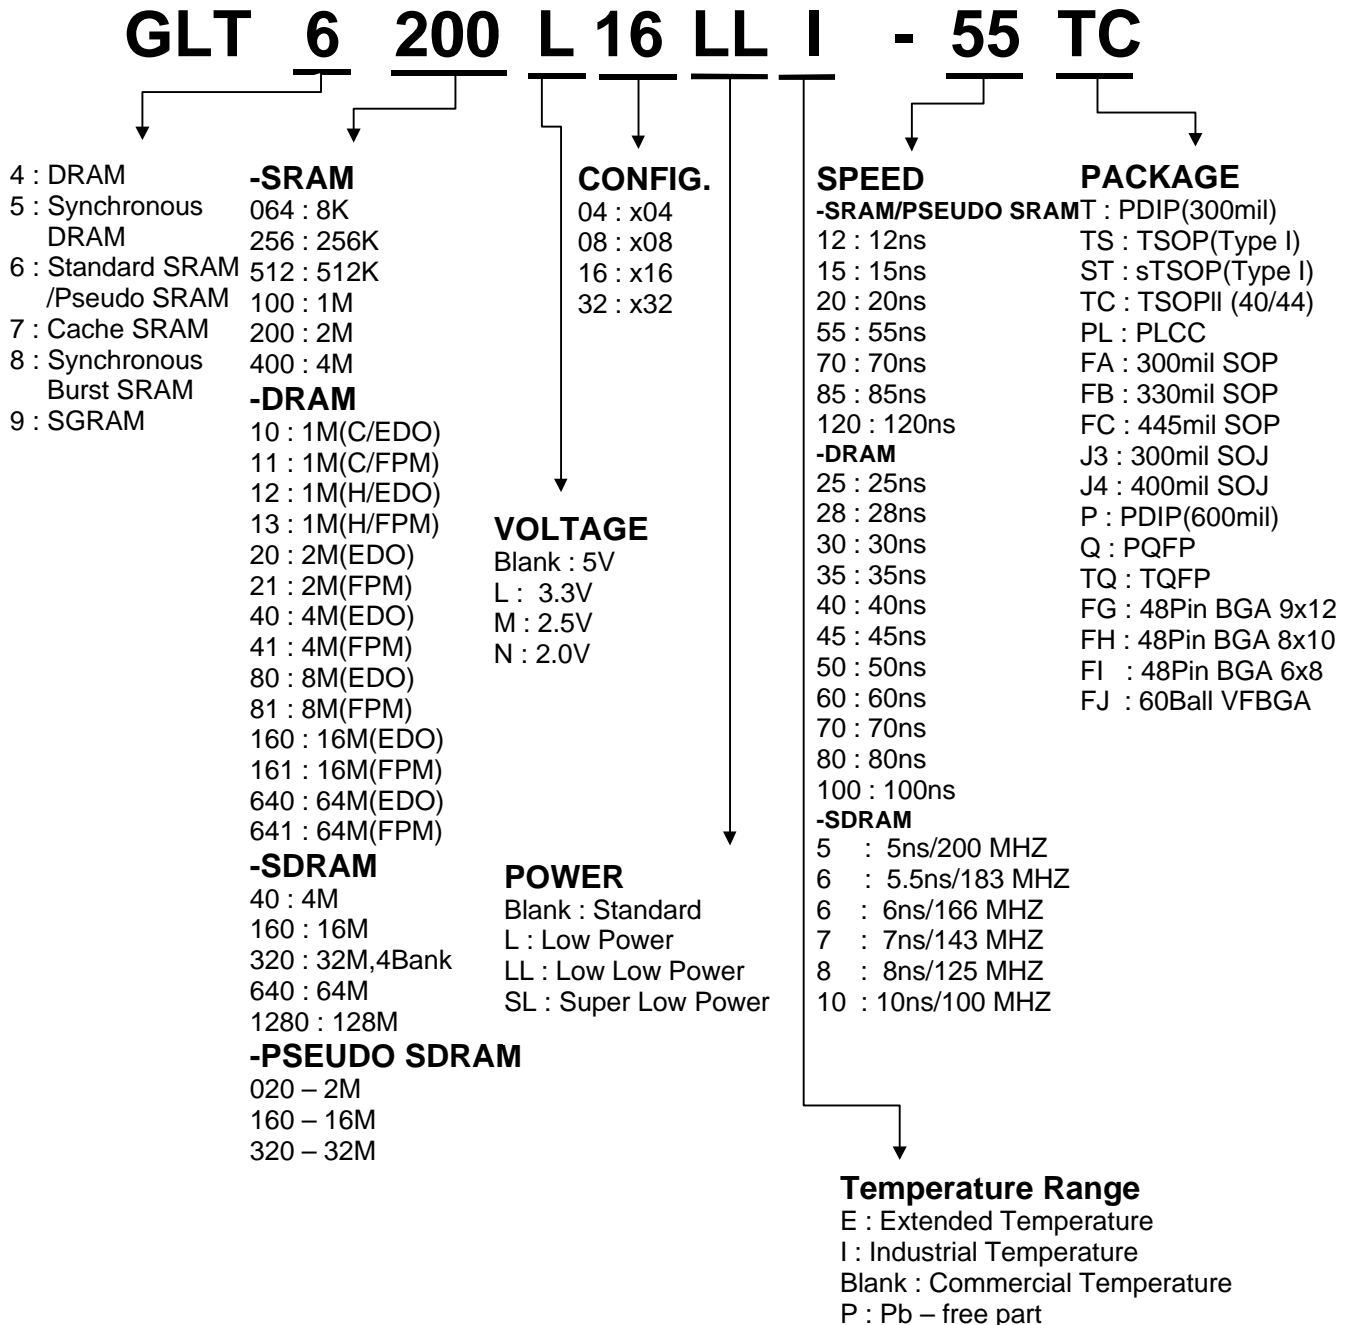


Package Information

44 pin Small Outline J-form Package (TSOPII)

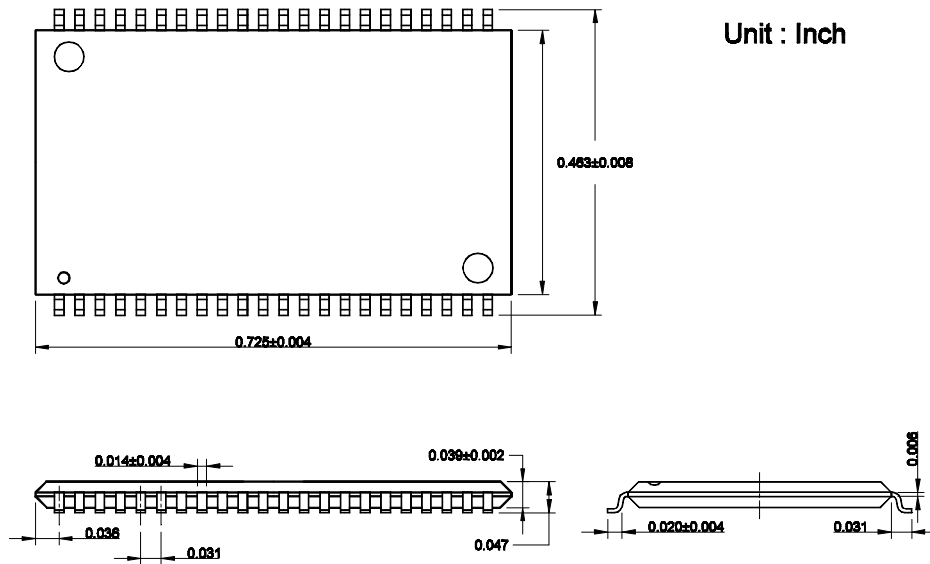

GLT6200L16 fpBGA

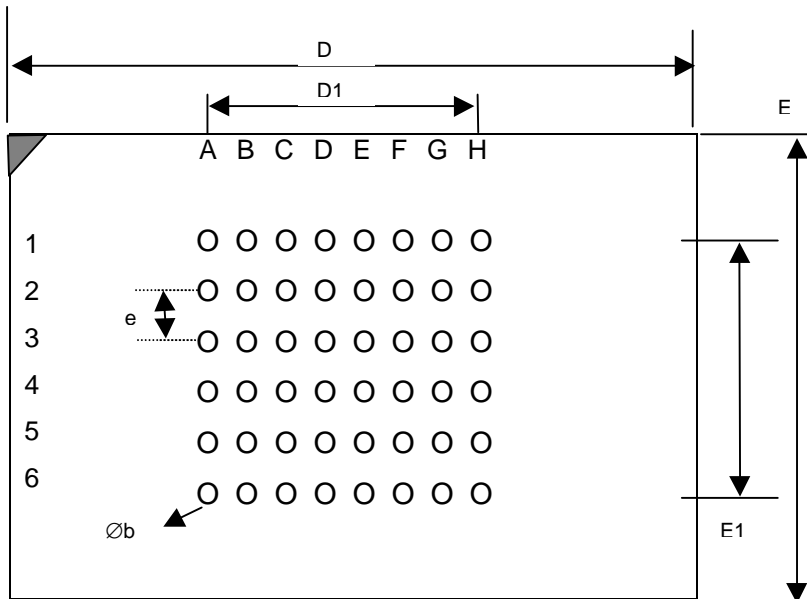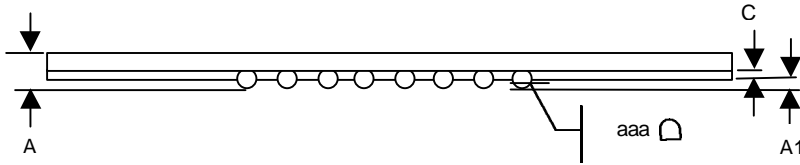

PACKAGE OUTLINE DWG.

SYMBOL	UNIT : MM
A	1.10±0.1
A1	0.22±0.05
$\varnothing b$	0.35
C	0.36TYP
D	8.00±0.10
D1	5.25
E	6.00±0.10
E1	3.75
e	0.75TYP
aaa	0.10