

**SWITCHING REGULATOR CONTROL CIRCUIT
FOR 500 kHz OPERATION**

μPC1906 is a control IC for the high performance switching power supply equipped with high speed/high sensitivity protection circuit. There are 3 series of μPC1099, 1905, 1906, as control IC for the high performance switching power supply. The features of μPC1906 are as follows:

- ① Power supply voltage is as high as 31 V.
→ It is possible to drive the output power MOS FET with high voltage.
- ② Hysteresis voltage of under voltage lockout circuit is 6.5 V.
→ The ripple allowance of the input capacitor is wide, therefore, the reduction of the same capacitor is possible.
- ③ Over current latch protection circuit is external reset mode.
→ When over current status occurs, power supply output is shut down. So it is most suitable for high reliability power supply.

CONTROL IC FAMILY FOR THE HIGH PERFORMANCE SWITCHING POWER SUPPLY

PART NUMBER	SUPPLY VOLTAGE	START-UP THRESHOLD VOLTAGE	THRESHOLD HYSTERESIS	OVER CURRENT LATCH PROTECTION MODE
μPC1099	26 V	11 V	3 V	Pulse by pulse current limiting
μPC1905	31 V	16.5 V	6.5 V	Pulse by pulse current limiting
μPC1906	31 V	16.5 V	6.5 V	Shut down and lockout


FEATURES

- Directly drive power MOS FET (totem pole circuit adopted)
- Over current latch circuit incorporated.
- Over voltage latch circuit incorporated
- Under voltage lockout circuit incorporated
- Remote control circuit incorporated
- Error amplifier incorporated

PART NUMBER	PACKAGE	QUALITY GRADE
μPC1906CX	16 pin plastic DIP (300 mil)	Standard
μPC1906GS	16 pin plastic SOP (300 mil)	

Please refer to "Quality grade on NEC Semiconductor Devices" (Document number IEI-1209) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.

PIN CONNECTION DIAGRAM (Top View)

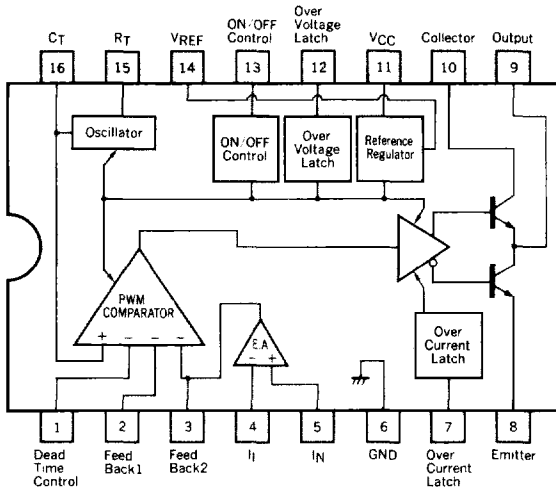


ABSOLUTE MAXIMUM RATING ($T_a = 25^\circ\text{C}$)

PARAMETER		SYMBOL	RATING	UNIT
Supply Voltage		V_{CC}	31	V
Output Voltage		V_C	31	V
Output Current		$I_C(\text{DC})$	100	mA
Peak Output Current		$I_C(\text{peak})$	1.2	A
Total Power Dissipation	$\mu\text{PC1906CX}$	$P_T(T_a = 25^\circ\text{C})$	1 000	mW
	$\mu\text{PC1906GS}$	$P_T(T_a = 25^\circ\text{C})$	694	mW
Operation Temperature		T_{opt}	-20 to +85	$^\circ\text{C}$
Storage Temperature		T_{stg}	-55 to +150	$^\circ\text{C}$

RECOMMENDED OPERATION REQUIREMENTS

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V_{CC}	12	18	30	V
Oscillation Frequency	f_{OSC}	50	200	500	kHz
Output Load Capacitance	C_L	-	2 200	3 000	pF

OPERATION WAVES






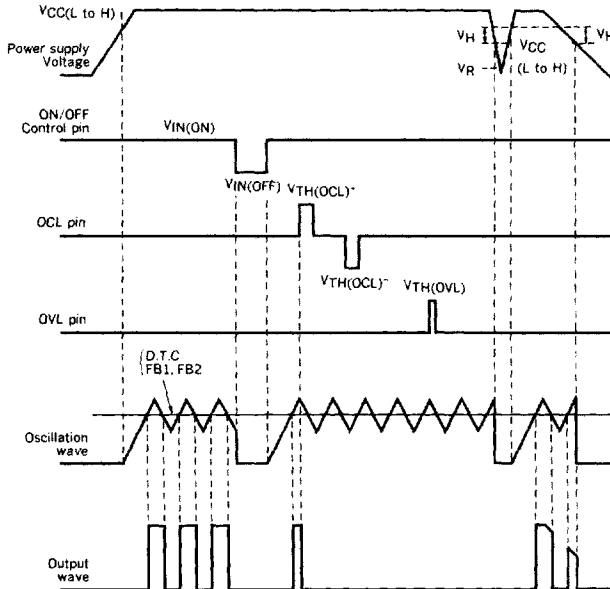








ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$, $V_{CC} = 18\text{V}$, $C_T = 470\text{pF}$, $R_T \approx 10\text{k}\Omega$, $f_{OSC} = 200\text{kHz}$)




BLOCK	PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS
Total	Standby Current	$I_{CC(SB)}$	0.1	0.25	0.4	mA	$V_{CC} = 15\text{V}$, $-10^\circ\text{C} \leq T_a \leq 85^\circ\text{C}$
	Circuit Current at OVL Operation Mode	$I_{CC(OVL)}$		10		mA	
	Circuit Current at Off Mode	$I_{CC(OFF)}$		10		mA	
	Circuit Current	I_{CC}		10	15	mA	$V_{CC} = V_C = 24\text{V}$, $V_D = 2.7\text{V}$, no load
Under Voltage Lockout Section	Start-Up Threshold Voltage	$V_{CC(L\text{ to }H)}$	15.5	16.5	17.5	V	
	Threshold Hysteresis	V_H	5.5	6.5	7.5	V	
Reference Voltage Section	Output Voltage	V_{REF}	4.8	5	5.2	V	$I_{REF} = 0$
	Line Regulation	REG_{LN}		4	10	mV	$12\text{V} \leq V_{CC} \leq 30\text{V}$, $I_{REF} = 0$
	Load Regulation	REG_L		2	12	mV	$0 \leq I_{REF} \leq 3\text{mA}$
	Output Voltage Temperature Coefficient	$V_{REF}/\Delta T$		100	700	$\mu\text{V}/^\circ\text{C}$	$I_{REF} = 0$, $-10^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$
	Short Circuit Current	$I_{O\text{ short}}$		15		mA	$V_{REF} = 0$
PWM Section	Input Bias Current	I_B			10	μA	
	Low Level Threshold Voltage	$V_{TH(L)}$		1.5		V	
	High Level Threshold Voltage	$V_{TH(H)}$		3.5		V	
	Dead Time Temperature Coefficient	$\Delta DT/\Delta T$		1	5	%	$V_D = 0.54 V_{REF}$, $-10^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$
Oscillator Section	Oscillation Frequency	f_{OSC}	180	200	220	kHz	
	Frequency Line Regulation	$\Delta f/\Delta V_{CC}$		0.6		%	$12\text{V} \leq V_{CC} \leq 30\text{V}$
	Frequency Temperature Coefficient	$\Delta f/\Delta T$		1	5	%	$-10^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$
Output Section	Low Level Output Voltage	V_{OL}			0.5	V	$I_{SINK} = 3\text{mA}$, $V_{CC} = V_C$
	High Level Output Voltage	V_{OH}		$V_{CC}-1.6$		V	$I_{SOURCE} = 30\text{mA}$, $V_{CC} = V_C$
	Output Voltage Rise Time	t_r		80		ns	$R_L = 15\Omega$, $C_L = 2\text{200}\mu\text{F}$
	Output Voltage Fall Time	t_f		30		ns	$V_{CC} = V_C$
Remote Control Section	Input Voltage at Output ON	$V_{IN(ON)}$	2.3	2.5	2.7	V	
	Input Voltage at Output OFF	$V_{IN(OFF)}$	2.1	2.3	2.5	V	
	Hysteresis Width	V_H	0.1	0.2	0.3	V	
Over Voltage Latch Section	Over Voltage Threshold Voltage	$V_{TH(OVL)}$	2.0	2.4	2.8	V	$-10^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$
	Input Bias Current	$I_B(OVL)$			4	μA	OVL pin voltage = $V_{TH(OVL)}$
	OVL Reset Voltage	$V_R(OVL)$		2		V	
	Delay to Output	$t_d(OVL)$		800		ns	
Over Current Latch Section	Over Current Threshold Voltage	$V_{TH(OCL)}^+$	200	220	240	mV	$-10^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$
	Over Current Threshold Voltage	$V_{TH(OCL)}^-$	-230	-210	-190	mV	$-10^\circ\text{C} \leq T_a \leq +85^\circ\text{C}$
	OCL Pin Output Current	$I_B(OCL)$		250		μA	
	Delay to Output	$t_d(OCL)^+$		120		ns	
	Delay to Output	$t_d(OCL)^-$		190		ns	

BLOCK	PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS
Error Amplification Section	Input Bias Current	I_B (AMP)			1	μ A	$V_{IN} = 2.5$ V
	Open-Loop Voltage Gain	A_v	60	90		dB	$V_{FB} = 2.9$ V
	Unit Gain Bandwidth	f_{unity}	1	1.6		MHz	
	High Level Output Voltage	V_{om}^+	3.0			V	
	Low Level Output Voltage	V_{om}^-			1.0	V	
	Common Mode Input Voltage Range	V_{ICM}^+	3			V	12 V $\leq V_{CC} \leq 30$ V,
	Common Mode Input Voltage Range	V_{ICM}^-			-0.3	V	-10 °C $\leq T_a \leq +85$ °C

TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

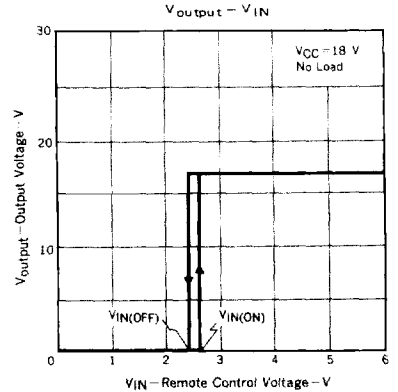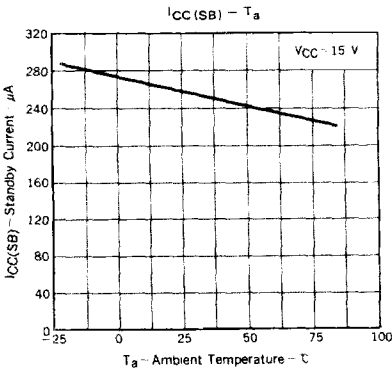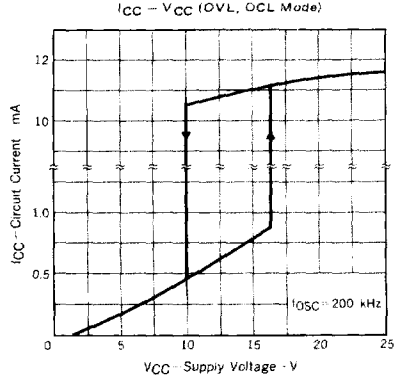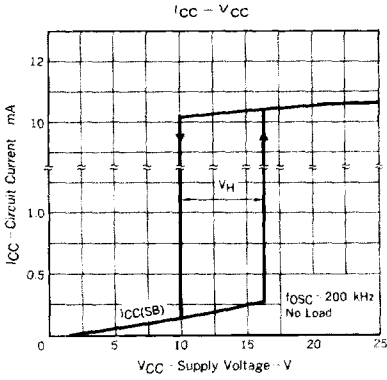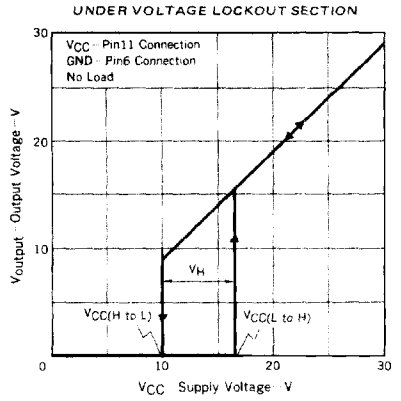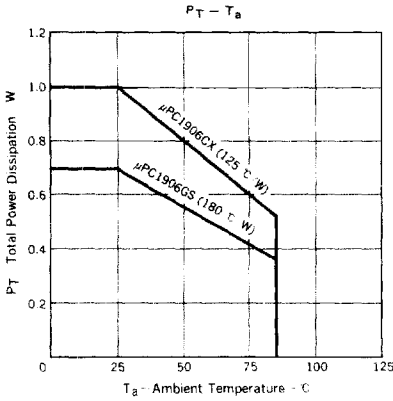

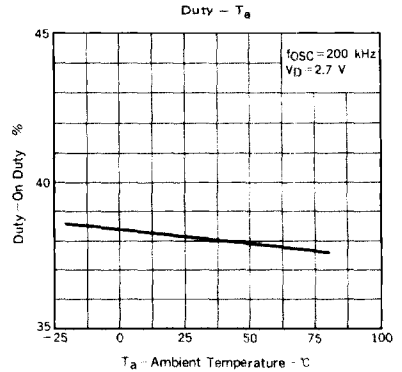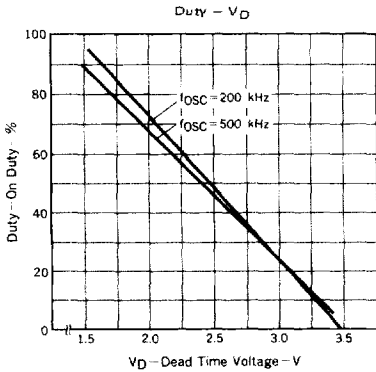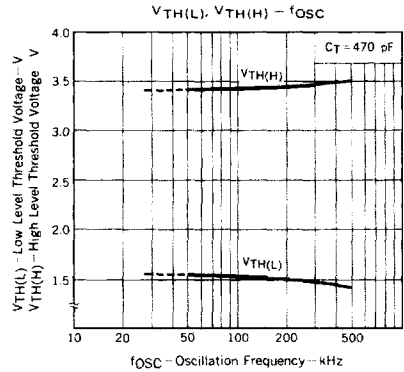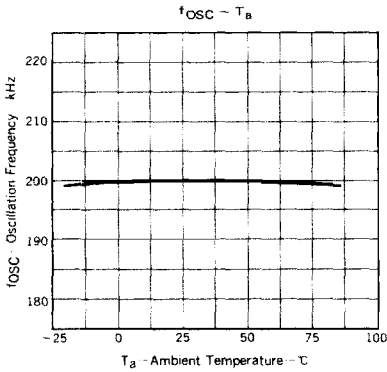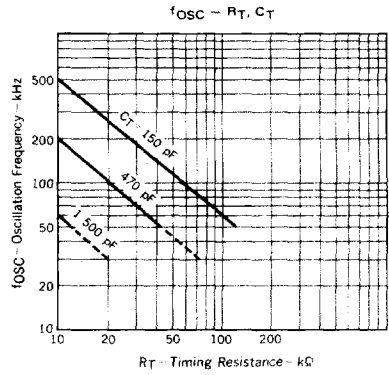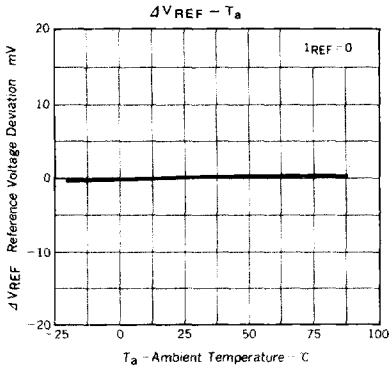

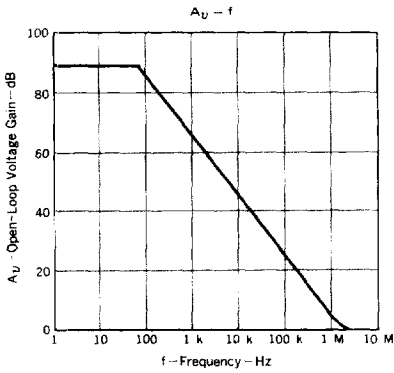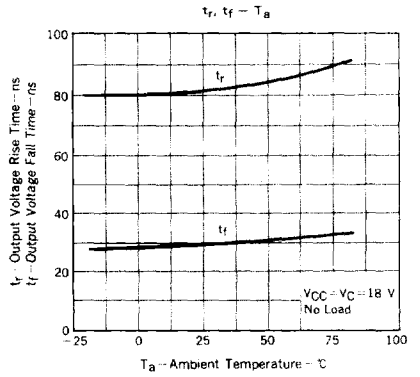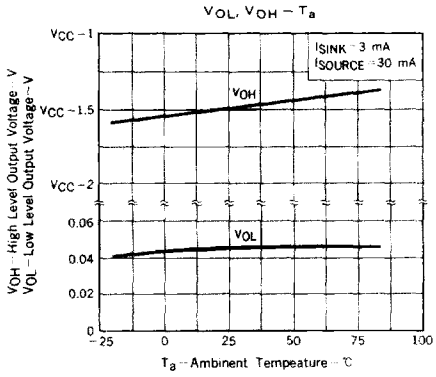

NOTE: When undershoot voltage at pin 9 occur, it must be cramped to prevent from wrong operation. See Fig. 1.





Fig. 1

16PIN PLASTIC DIP (300 mil)

μPC1906CX

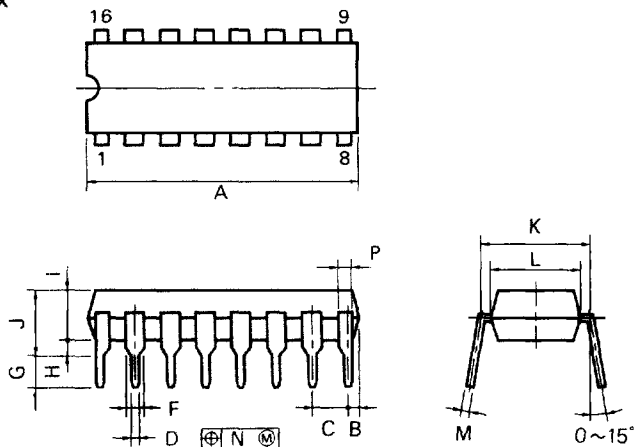

P16C-100-300B


NOTES

- 1) Each lead centerline is located within 0.25 mm (0.01 inch) of its true position (T.P.) at maximum material condition.
- 2) Item "K" to center of leads when formed parallel.

ITEM	MILLIMETERS	INCHES
A	20.32 MAX.	0.800 MAX.
B	1.27 MAX.	0.050 MAX.
C	2.54 (T.P.)	0.100 (T.P.)
D	0.50 ^{+0.10}	0.020 ^{+0.004} _{-0.005}
F	1.1 MIN.	0.043 MIN.
G	3.5 ^{+0.3}	0.138 ^{+0.012}
H	0.51 MIN.	0.020 MIN.
I	4.31 MAX.	0.170 MAX.
J	5.08 MAX.	0.200 MAX.
K	7.62 (T.P.)	0.300 (T.P.)
L	6.5	0.256
M	0.25 ^{+0.10} _{-0.05}	0.010 ^{+0.004} _{-0.003}
N	0.25	0.01
P	1.1 MIN.	0.043 MIN.

16PIN PLASTIC SOP (300 mil)

μPC1906GS

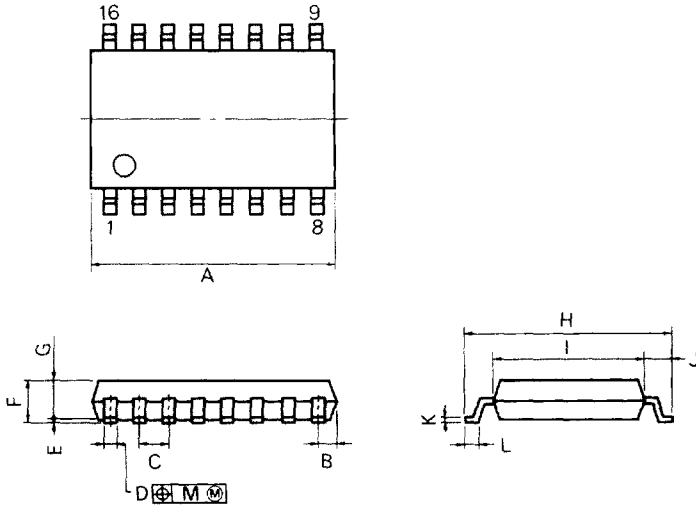

NOTE

Each lead centerline is located within 0.12 mm (0.005 inch) of its true position (T.P.) at maximum material condition.

P16GM-50-300B-1

ITEM	MILLIMETERS	INCHES
A	10.46 MAX.	0.412 MAX.
B	0.78 MAX.	0.031 MAX.
C	1.27 (T.P.)	0.050 (T.P.)
D	0.40 ^{+0.10} / _{0.08}	0.016 ^{0.004} / _{0.003}
E	0.1 ^{+0.1}	0.004 ^{+0.004}
F	1.8 MAX.	0.071 MAX.
G	1.55	0.061
H	7.7 ^{+0.3}	0.303 ^{+0.012}
I	5.6	0.220
J	1.1	0.043
K	0.20 ^{+0.10} / _{0.06}	0.008 ^{0.004} / _{0.002}
L	0.6 ^{+0.2}	0.024 ^{0.009} / _{0.009}
M	0.12	0.005