

ZENER DIODES


POWER DISSIPATION: 5.0 W

FEATURES

- ◇ Silicon planar power zener diodes
- ◇ For use in stabilizing and clipping circuits with high power rating.
- ◇ Standard zener voltage tolerance is $\pm 10\%$. Add suffix "A" for $\pm 5\%$ tolerance. other zener voltage and tolerances are available upon request.

MECHANICAL DATA

- ◇ Case: DO-27, glass case
- ◇ Terminals: solderable per MIL-STD-202, method 208
- ◇ Polarity: cathode Band
- ◇ Marking: type number
- ◇ Approx. weight: 1.15 grams.

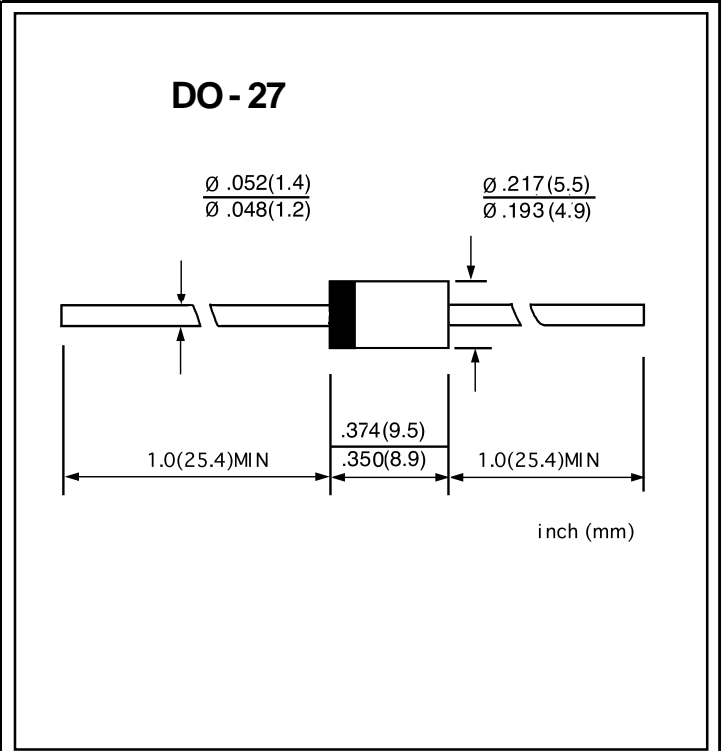

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

	SYMBOL	VALUE	UNIT
Zener current (see Table "Characteristics")			
DC power dissipation @ $T_L=75$, measure at zero lead length (Fig.1) derate above 75 (NOTE 1)	P_D	5.0 40.0	W mW
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)(NOTE 1,2)	I_{FSM}	see fig.5	A
Junction temperature	T_J	-55---+150	°C
Storage temperature range	T_s	-55---+150	°C

NOTES: (1) Mounted on 8.0mm² copper pads to each terminal.

www.galaxycn.com

(2) 8.3ms single half sine-wave, or equivalent square wave, duty cycle=4 pulses per minute maximum.

ELECTRICAL CHARACTERISTICS (T_A=25°C)

Type	Nominal zener voltage	Test current	Maximum dynamic impedance		Maximum reverse leakage current		Surge current	Max voltage regulation	Maximum regulator current
	V _Z @ I _{ZT}	I _{ZT}	Z _{ZT} @ I _{ZT}	Z _{ZT} @ I _{ZK}	I _R	Test voltage V _R	I _R	V _Z	I _{ZM}
	V	mA	Ω	Ω	μA	V	A	V	mA
1N5348B	11	125	2.5	125	5	8.4	8	0.25	430
1N5349B	12	100	2.5	125	2	9.1	7.5	0.25	395
1N5350B	13	100	2.5	100	1	9.9	7	0.25	365
1N5351B	14	100	2.5	75	1	10.6	6.7	0.25	340
1N5352B	15	75	2.5	75	1	11.5	6.3	0.25	315
1N5353B	16	75	2.5	75	1	12.2	6	0.3	295
1N5354B	17	70	2.5	75	0.5	12.9	5.8	0.35	280
1N5355B	18	65	2.5	75	0.5	13.7	5.5	0.4	265
1N5356B	19	65	3	75	0.5	14.4	5.3	0.4	250
1N5357B	20	65	3	75	0.5	15.2	5.1	0.4	237
1N5358B	22	50	3.5	75	0.5	16.7	4.7	0.45	216
1N5359B	24	50	3.5	100	0.5	18.2	4.4	0.55	198
1N5360B	25	50	4	110	0.5	19	4.3	0.55	190
1N5361B	27	50	5	120	0.5	20.6	4.1	0.6	176
1N5362B	28	50	6	130	0.5	21.2	3.9	0.6	170
1N5363B	30	40	8	140	0.5	22.8	3.7	0.6	158
1N5364B	33	40	10	150	0.5	25.1	3.5	0.6	144
1N5365B	36	30	11	160	0.5	27.4	3.3	0.65	132
1N5366B	39	30	14	170	0.5	29.7	3.1	0.65	122
1N5367B	43	30	20	190	0.5	32.7	2.8	0.7	110
1N5368B	47	25	25	210	0.5	35.8	2.7	0.8	100
1N5369B	51	25	27	230	0.5	38.8	2.5	0.9	93
1N5370B	56	20	35	280	0.5	42.6	2.3	1	86
1N5371B	60	20	40	350	0.5	45.5	2.2	1.2	79
1N5372B	62	20	42	400	0.5	47.1	2.1	1.35	76
1N5373B	68	20	44	500	0.5	51.7	2	1.5	70
1N5374B	75	20	45	620	0.5	56	1.9	1.6	63
1N5375B	82	15	65	720	0.5	62.2	1.8	1.8	58
1N5376B	87	15	75	760	0.5	66	1.7	2	54.5
1N5377B	91	15	75	760	0.5	69.2	1.6	2.2	52.5
1N5378B	100	12	90	800	0.5	76	1.5	2.5	47.5
1N5379B	110	12	125	1000	0.5	83.6	1.4	2.5	43
1N5380B	120	10	170	1150	0.5	91.2	1.3	2.5	39.5
1N5381B	130	10	190	1250	0.5	98.8	1.2	2.5	36.6
1N5382B	140	8	230	1500	0.5	106	1.2	2.5	34
1N5383B	150	8	330	1500	0.5	114	1.1	3	31.6
1N5384B	160	8	350	1650	0.5	122	1.1	3	29.4
1N5385B	170	8	380	1750	0.5	129	1	3	28
1N5386B	180	5	430	1750	0.5	137	1	4	26.4
1N5387B	190	5	450	1850	0.5	144	0.9	5	25
1N5388B	200	5	480	1850	0.5	152	0.9	5	23.6

NOTE:

- TOLERANCE AND VOLTAGE DESIGNATION**-The JEDEC type numbers shown indicate a tolerance of ±10% with guaranteed limits on only V_Z, I_R, I_r, and V_F as shown in the electrical characteristics table. Units with guaranteed limits on all seven parameters are indicated by suffix "B" for ±5% tolerance.
- ZENER VOLTAGE (V_Z) AND IMPEDANCE (Z_{ZT} & Z_{ZK})** - Test conditions for zener voltage and impedance are as follows; I_Z is applied 40±10ms prior to reading. Mounting contacts are located from the inside edge of mounting clips to the body of the diode.
- SURGE CURRENT (I_r)** - Surge current is specified as the maximum allowable peak, non-recurrent square-wave current with a pulse width, PW, of 8.3ms. The data given in Fig 5. May be used to find the maximum surge current for a square wave of any pulse width between 1 ms by plotting the applicable points on logarithmic paper. Examples of this, using the 6.8v and 200v zeners, are shown in Fig 6. Mounting contact located as specified in NOTE 3.
- VOLTAGE REGULATION (V_Z)** - Test conditions for voltage regulation are as follows: V_Z measurements are the made at 10% and then at 50% of the I_Z ma value listed in the electrical characteristics table. The test currents are the same for the 5% and 10% tolerance devices. The test current time duration for each V_Z measurement is 40±10ms. Mounting contact located as specified in NOTE 2.
- MAXIMUM REGULATOR CURRENT (I_{ZM})** - The maximum current shown is based on the maximum voltage of a 5% type unit. Therefore, it applies only to the B-suffix device. The actual I_{ZM} for any device may not exceed the value of 5 watts divided by the actual V_Z of the device. T_L=75 at maximum from the device body.

FIG.1 -- FORWARD DERATING CURVE

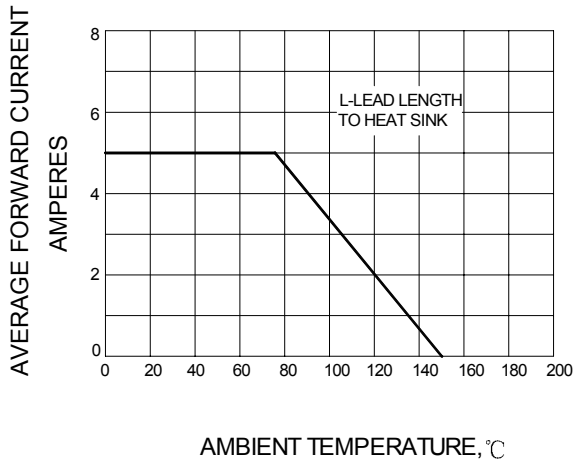


FIG.2 -- TEMPERATURE COEFFICIENT RANGE

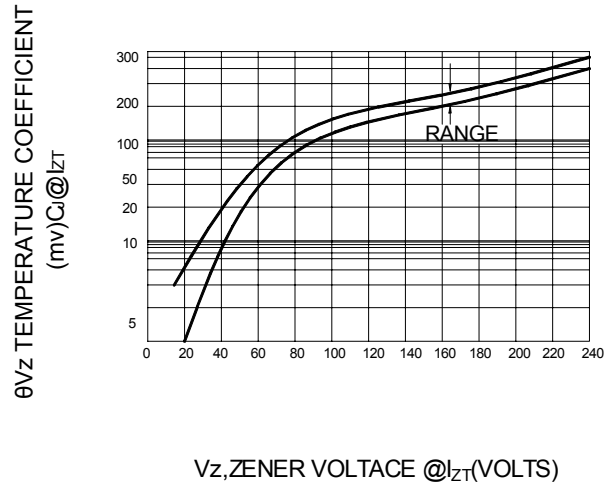


FIG.3 -- TYPICAL THERMAL RESISTANCE

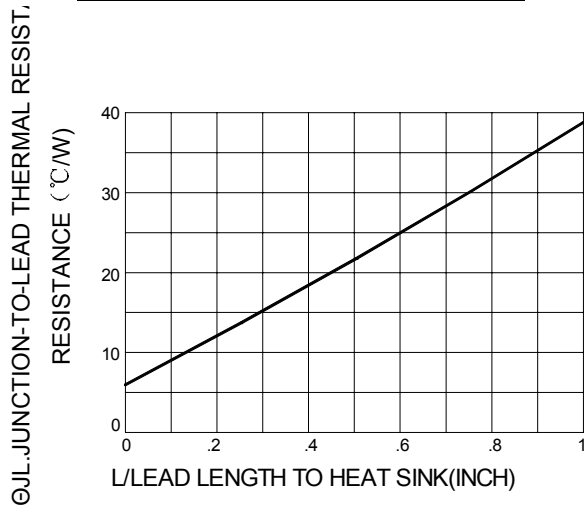


FIG.4 -- MAXIMUM NON-REPETITIVE SURGE CURRENT

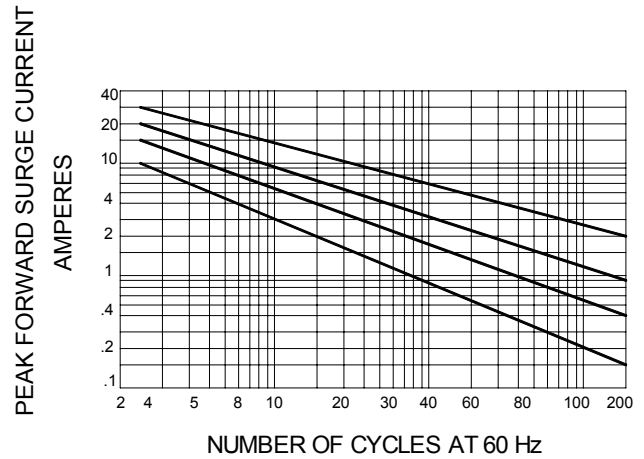


FIG.5 -- TYPICAL THERMAL RESPONSE

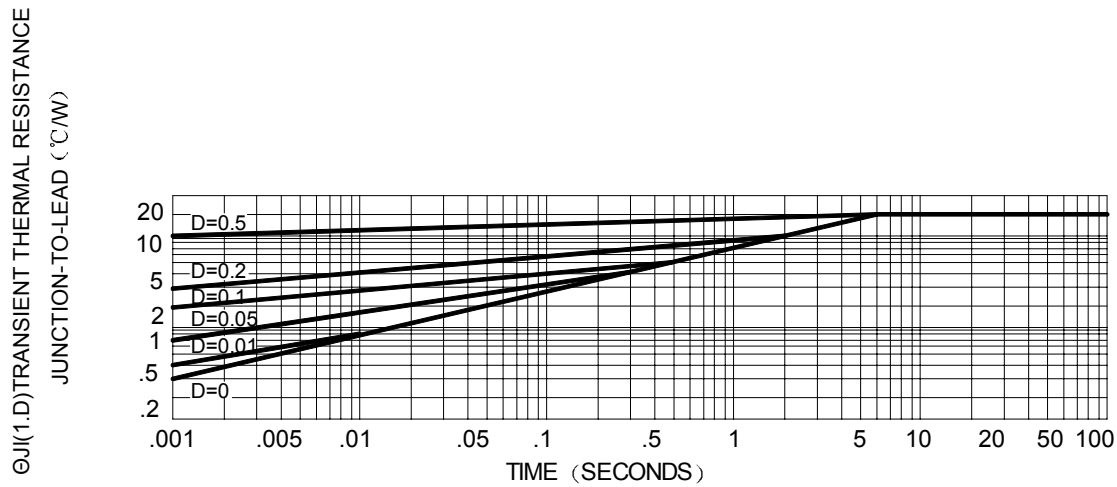


FIG.6 – PEAK SURGE CURRENT VERSUS PULSE WIDTH

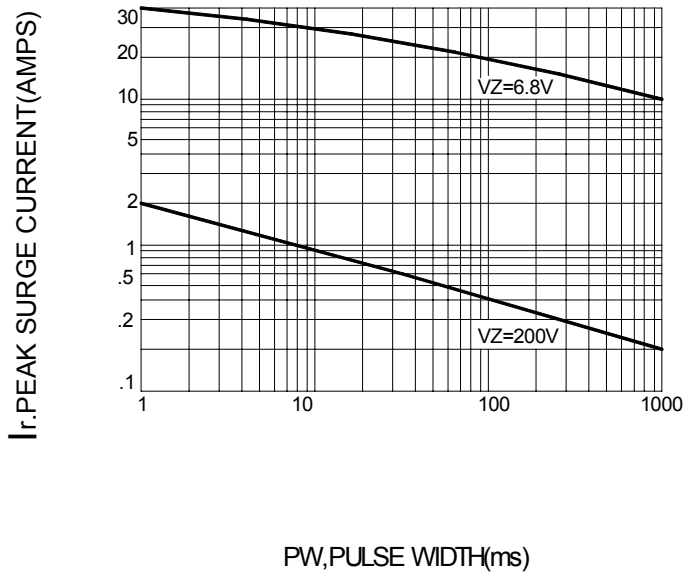


FIG.7 – ZENER VOLTAGE VERSUS ZENER CURRENT
 $V_Z=6.8$ THRU 10 VOLTS

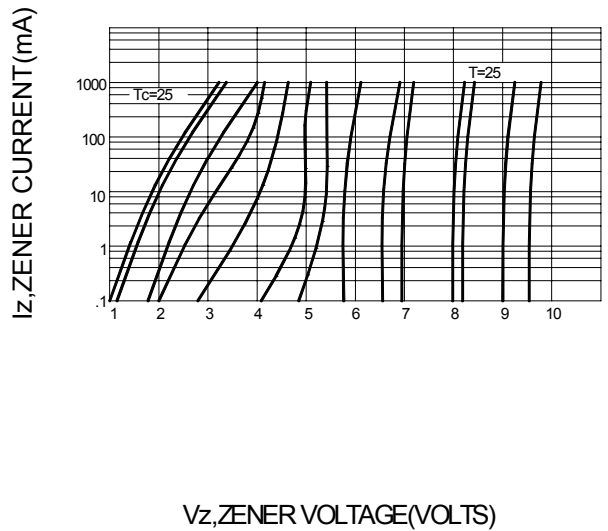


FIG.8 – ZENER VOLTAGE VERSUS ZENER CURRENT
 $V_Z=11$ THRU 75 VOLTS

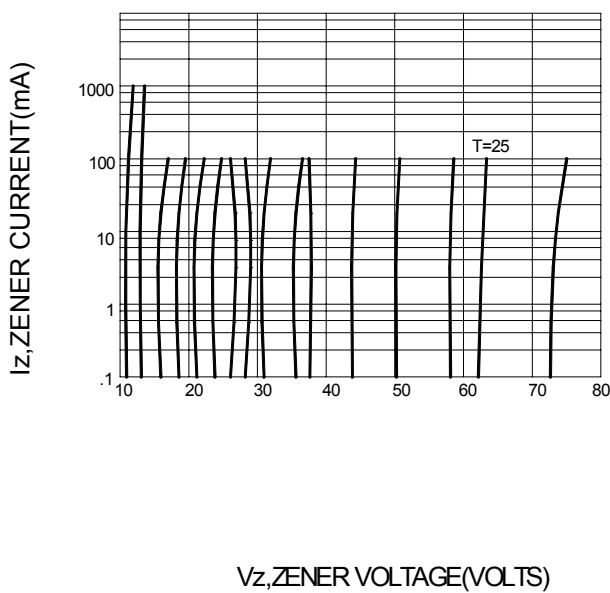


FIG.9 – ZENER VOLTAGE VERSUS ZENER CURRENT
 $V_Z=82$ THRU 200 VOLTS

