
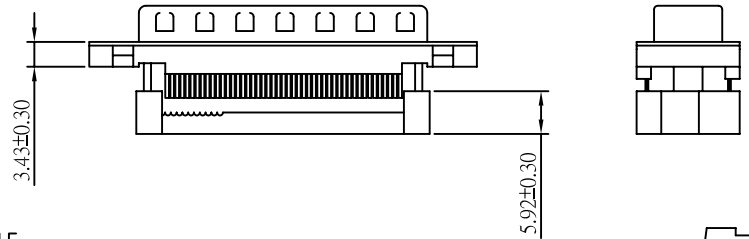





CUSTOMER COPY

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

MALE

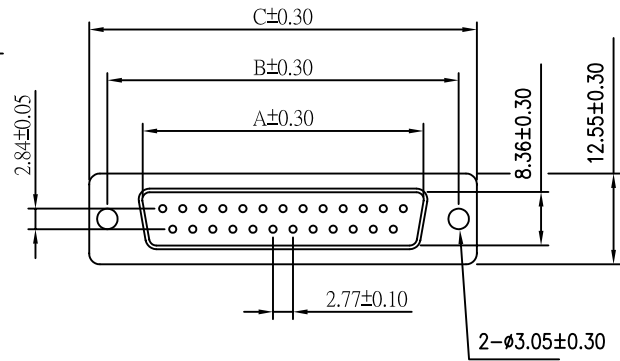

FEMALE

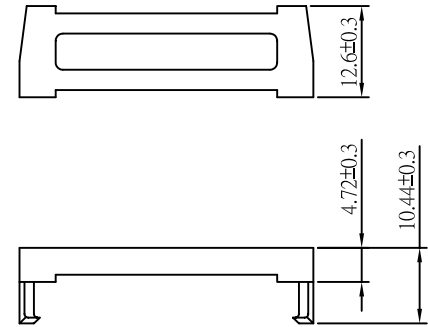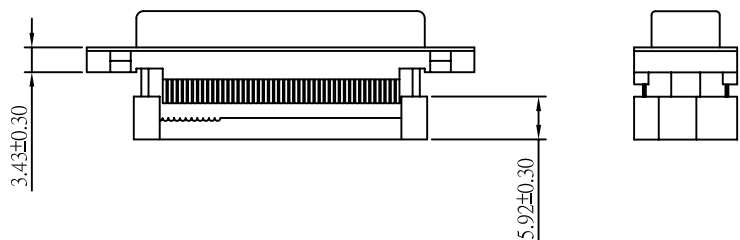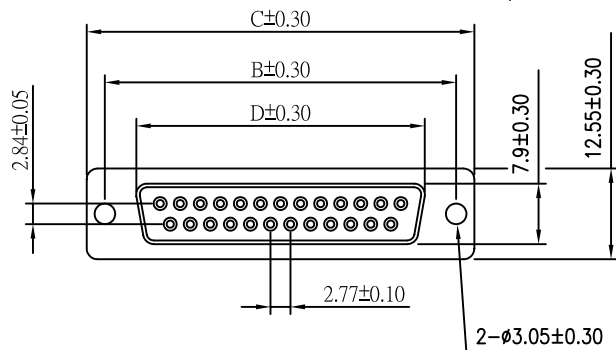


SPECIFICATION

- * Current Rating: 5 A
- * Withstanding Voltage: 1000 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -40°C to +85°C

MATERIAL

- * Contact: Brass , Selective Gold or All Gold
- * Insulator: PBT & 30% G. F.
- * Shell: Stell , Tin Plated

ORDER INFORMATION

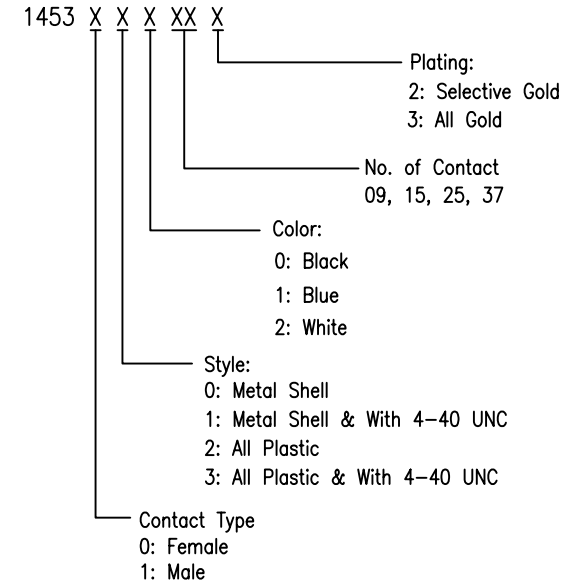

PART NO.	A	B	C	D
1453XXX09X	16.92	24.99	30.81	16.33
1453XXX15X	25.25	33.32	39.14	24.66
1453XXX25X	38.96	47.04	53.04	38.38
1453XXX37X	55.42	63.50	69.32	54.84



ACMELUX CO., LTD.

TEL:886-2-85124595 FAX:886-2-85124322

0.0±	SCALE:	TITLE: D-SUB CONNECTOR I.D.C Type	PART NO:
0.00±	UNIT: MM		APP BY:
0.000±			CHK BY:
		MATL: PBT + 30% G.F.	DR BY: JACK LIN
		DWG. NO. C145300	