


8 Amp Ultra Fast Rectifiers UES1401 — UES1404

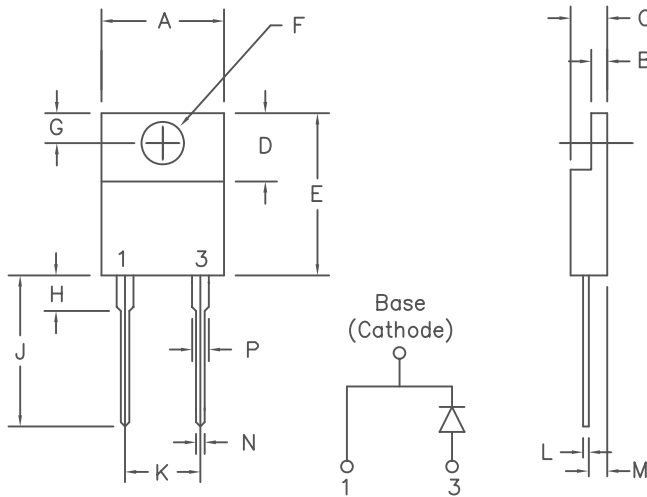

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.390	.415	9.91	10.54	
B	.045	.055	1.14	1.40	
C	.180	.190	4.57	4.83	
D	.245	.260	6.22	6.60	
E	.550	.650	13.97	16.51	
F	.139	.155	3.53	3.94	Dia.
G	.100	.120	2.54	3.05	
H	---	.250	---	6.35	
J	.500	.580	12.70	14.73	
K	.190	.210	4.83	5.33	
L	.014	.025	0.35	0.63	
M	.080	.115	2.03	2.92	
N	.028	.038	0.71	0.96	
P	.045	.055	1.14	1.40	

Similar to TO-220AC

Microsemi Catalog Number	Industry Part Number	Repetitive Peak Reverse Voltage	Transient Peak Reverse Voltage
UES1401		50V	50V
UES1402		100V	100V
UES1403		150V	150V
UES1404		200V	200V

- Ultra Fast Recovery Rectifier
- 150°C Junction Temperature
- V_{RRM} 50 TO 200 Volts
- t_{RR} 35 nsec maximum

Electrical Characteristics

Average forward current	I _{F(AV)} 8 Amps	T _C = 132°C
Maximum surge current	I _{FSM} 100 Amps	8.3ms, half sine, T _J = 150°C
Max peak forward voltage	V _{FM} 1.0 Volts	I _{FM} = 8A: T _J = 25°C*
Typical peak forward voltage	V _{FM} 0.75 Volts	I _{FM} = 8A: T _J = 150°C*
Max peak reverse current	I _{RM} 10 μA	V _{RRM} , T _J = 25°C
Typical peak reverse current	I _{RM} 125 μA	V _{RRM} , T _J = 150°C
Max recovery time	t _{RR} 35 ns	1/2A, 1A, 1/4A
Typical junction capacitance	C _J 56pF	VR = 10V, T _J = 25°C

*Pulse test: Pulse width 300 μsec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T _{STG}	-55°C to 175°C
Operating junction temp range	T _J	-55°C to 150°C
Max thermal resistance	R _{θJC}	2.4°C/W junction to case
Mounting torque		8-12 inch pounds (6-32 screw)
Weight		0.08 ounces (2.3 grams) typical



SCOTTSDALE

8700 East Thomas Road, P.O. Box 1390

Scottsdale, AZ 85252

PH: (480) 941-6300

FAX: (480) 947-1503

www.microsemi.com

05-31-07 Rev. 2

UES1401 — UES1404

Figure 1
Typical Forward Characteristics

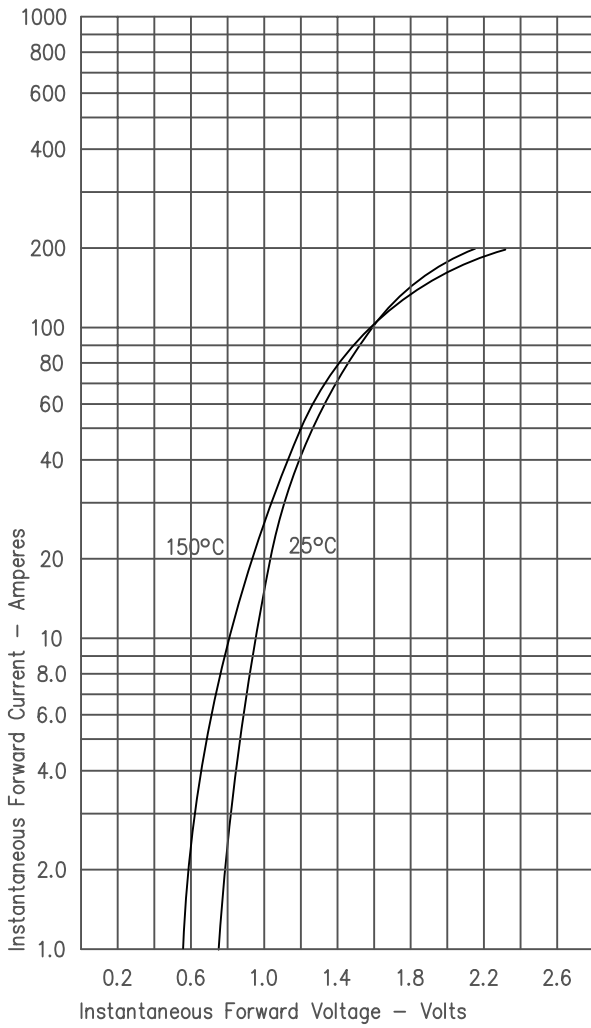


Figure 3
Typical Junction Capacitance

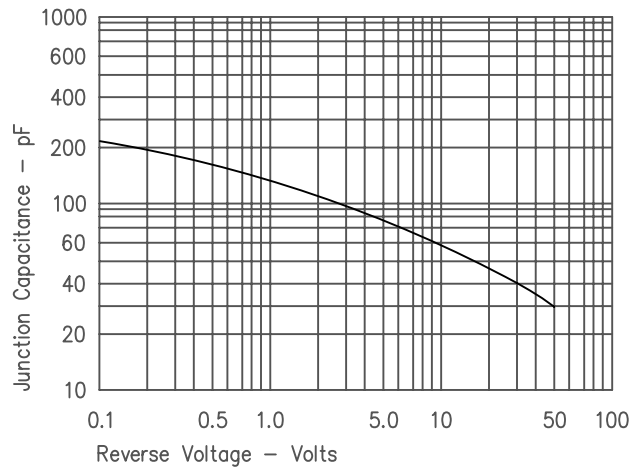


Figure 4
Forward Current Derating

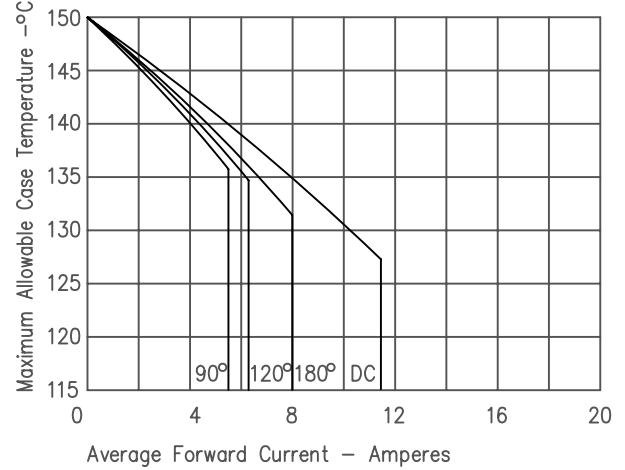


Figure 2
Typical Reverse Characteristics

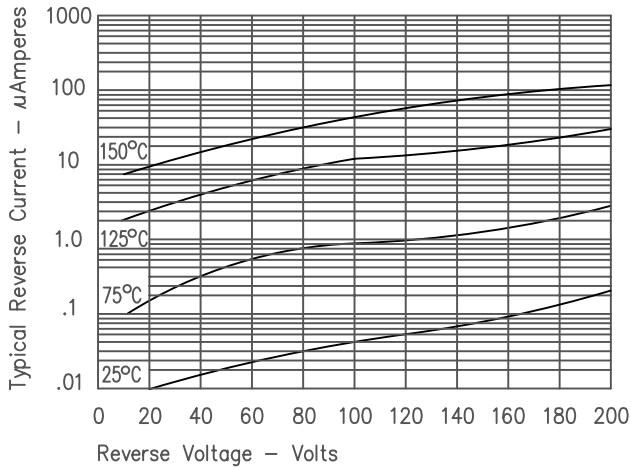


Figure 5
Maximum Forward Power Dissipation

