


Capacitor, tantalum, 150 uF, 7343, +/-20% Tol, 6.3V@85C

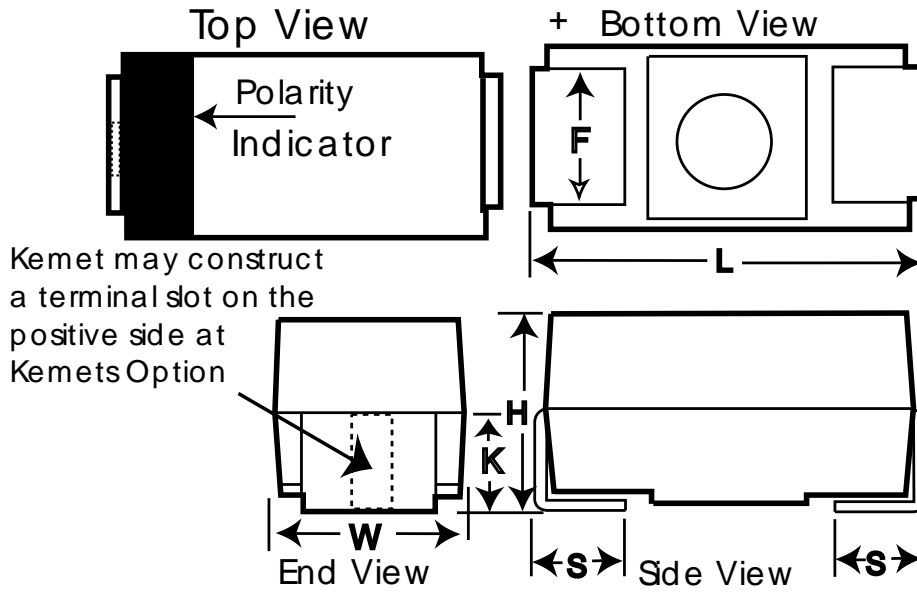

Dimensions (mm)

ID	Dimension	Tolerance
L	7.3	+/-0.3
W	4.3	+/-0.3
H	2.8	+/-0.3
K	1.8	typ
F	2.4	+/-0.1
S	1.3	+/-0.3

Specifications

Manufacturer:	KEMET
Capacitance:	150 uF
Voltage DC @ 85C:	6.3V
Voltage DC @ 105C:	5.2V
Voltage DC @ 125C:	4V
Tolerance:	+/-20%
Application:	General Purpose/lowESR
Temperature Range:	-55/+125C
Body Type:	Molded Chip
Construction:	Std Chip-MnO2
ESR:	50 mOhm
Footprint:	7343
Termination:	Tin
Leakage Current:	9.5 uA
Dissipation Factor:	8%
Ripple @ 25C:	1.73 A
Ripple @ 85C:	1.557 A
Ripple @ 125C:	0.692 A
Package Kind:	T&R
Package Quantity:	750

Notes:

-In polarity stripe, at KEMET's option, type may be indicated:
 see catalog for explanation of symbols