

# 2.0mm (0.079") Shrouded Header







## 1306 Series

### APPLICATION AND FEATURES


1. Assures reliable flat cable-to-P.C.Board interconnection.
2. Fully shrouded.
3. No ejector latches is for saving space.

### SPECIFICATIONS


Current Rating: 1 Amps  
 Insulator resistance: 5000 Megohms Min.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40°C to +105°C  
 Contact Material: Brass  
 Insulator Material: P.B.T,+30%  
 Glass Fiber UL94V-0

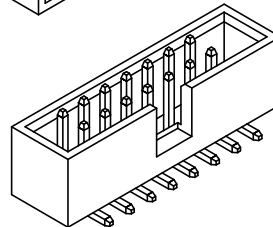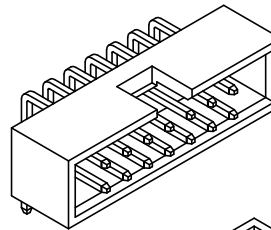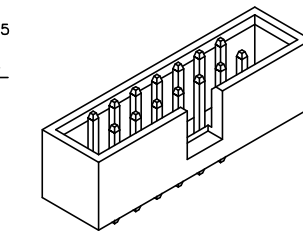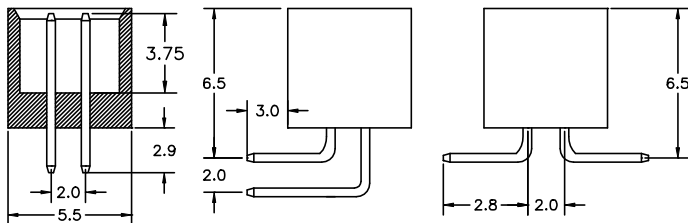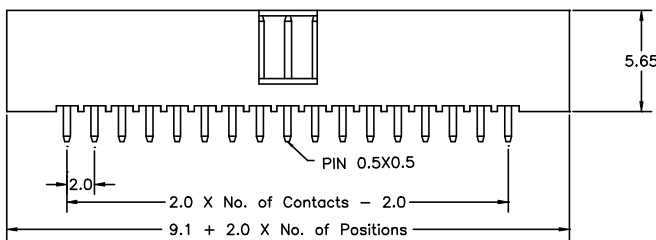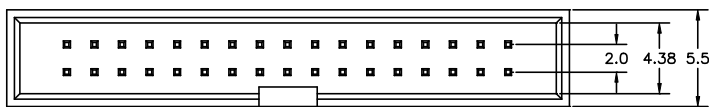

Recommended P.C.Board  
Hole Layout

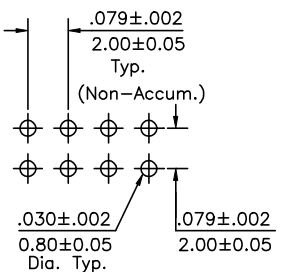

For Straight &  
Right angle type

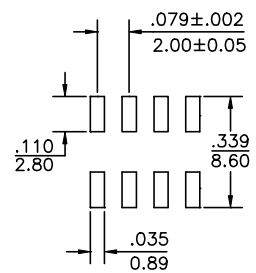

For SMT type

### Order Information 1306 Series

Example: 1306 - 34 - S - 02

Series No.

1306

Number of Contacts

4,6,8,10,12,14,16,20,  
22,24,26,30,32,34,36,  
40,44,50,60,64,68

Connector Type

Straight S  
 Right Angle R  
 SMT M

Contact Plating

Tin Plated 01  
 Gold Plated  
 Flash 02  
 10 μ" 10  
 30 μ" 30