
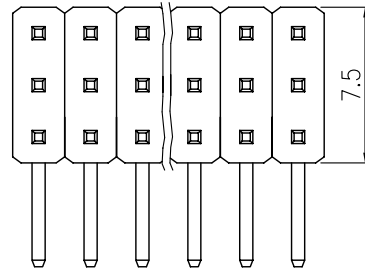
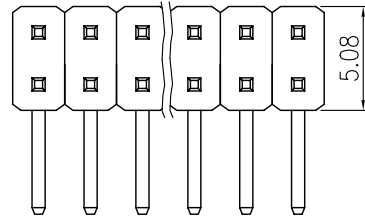
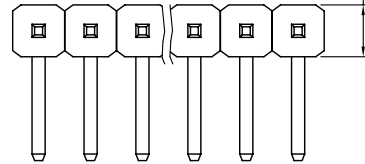
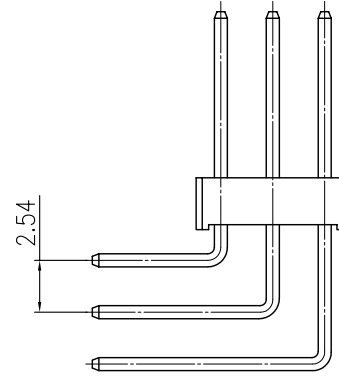
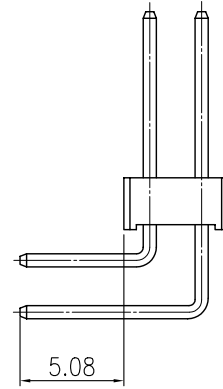



V1.1

REVISIONS							
SYM	DISCRIPTION	DATE	APPROVED	SYM	DISCRIPTION	DATE	APPROVED
△				△			
△				△			

****CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!**

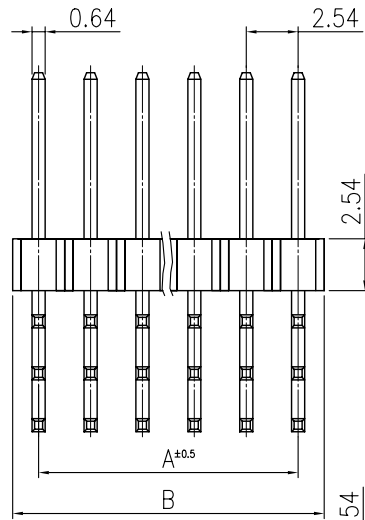

SPECIFICATION
 CURRENT RATING : 1 A
 INSULATOR RESISTANCE: 5000MΩ MIN.
 DIELECTRIC WITHSTANDING : AC 500V.
 OPERATING TEMPERATURE: -40°C~+105°C.
 CONTACT MATERIAL : BRASS
 INSULATOR MATERIAL : STANDARD : P.B.T
 FINISH : GOLD FLASH

ORDER INFORMATION:
 PHa016-PaXX0XGfA
 PH: PIN HEADER
 a: 2.54mmX2.54mm PITCH
 016: SERIES NO.
 Pa: PCB TYPE, RIGHT ANGLE
 XX: NO. OF PINS PER ROW
 0X: NO. OF ROW
 Gf: TERMINAL PLATING, GOLD FLUSH
 A: RIGHT ANGLE CONFIGURATION, 1.5mm

PART NO.	CIRCUITS	DIMENSION	
		A	B
PHa016-Pa020_GfA_X2		2.54	5.08
PHa016-Pa030_GfA_X3		5.08	7.62
PHa016-Pa040_GfA_X4		7.62	10.16
PHa016-Pa050_GfA_X5		10.16	12.70
PHa016-Pa060_GfA_X6		12.70	15.24
PHa016-Pa070_GfA_X7		15.24	17.78
PHa016-Pa080_GfA_X8		17.78	20.32
PHa016-Pa090_GfA_X9		20.32	22.86
PHa016-Pa100_GfA_X10		22.86	25.40
PHa016-Pa110_GfA_X11		25.40	27.94
PHa016-Pa120_GfA_X12		27.94	30.48
PHa016-Pa130_GfA_X13		30.48	33.02
PHa016-Pa140_GfA_X14		33.02	35.56
PHa016-Pa150_GfA_X15		35.56	38.10
PHa016-Pa160_GfA_X16		38.10	40.64
PHa016-Pa170_GfA_X17		40.64	43.18
PHa016-Pa180_GfA_X18		43.18	45.72
PHa016-Pa190_GfA_X19		45.72	48.26
PHa016-Pa200_GfA_X20		48.26	50.80
PHa016-Pa210_GfA_X21		50.80	53.34
PHa016-Pa220_GfA_X22		53.34	55.88
PHa016-Pa230_GfA_X23		55.88	58.42
PHa016-Pa240_GfA_X24		58.42	60.96
PHa016-Pa250_GfA_X25		60.96	63.50
PHa016-Pa260_GfA_X26		63.50	66.04
PHa016-Pa270_GfA_X27		66.04	68.58
PHa016-Pa280_GfA_X28		68.58	71.12
PHa016-Pa290_GfA_X29		71.12	73.66
PHa016-Pa300_GfA_X30		73.66	76.20
PHa016-Pa310_GfA_X31		76.20	78.74
PHa016-Pa320_GfA_X32		78.74	81.28
PHa016-Pa330_GfA_X33		81.28	83.82
PHa016-Pa340_GfA_X34		83.82	86.36
PHa016-Pa350_GfA_X35		86.36	88.90
PHa016-Pa360_GfA_X36		88.90	91.44
PHa016-Pa370_GfA_X37		91.44	93.98
PHa016-Pa380_GfA_X38		93.98	96.52
PHa016-Pa390_GfA_X39		96.52	99.06
PHa016-Pa400_GfA_X40		99.06	101.6

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.25	SIGNATURES		DATE	MODEL
	DRAWN	TONY	12/DEC/02'	TITLE
	CHECKED	ZOLA	12/DEC/02'	PIN HEADER
SYMBOL	UNIT	SCALE	NO.	
△	mm	4/1	PHa016-Pa__0_GfA	

MMT CORPORATION