

MAJOR LEAGUE ELECTRONICS

2mm (.079") c.l. Terminal Strip Headers Straight

A-61-05-07



T S H S - 2 [] - [] - [] - [] - [] - []

H High Temp.

Pins per row 01-50

Singles **Doubles** **S D**

Pin Options

Length	Post	Tail	
(8,20) .323	(3,20) .126	(3,51) .138	02
	(3,71) .146	(3,00) .118	04
	(4,01) .158	(2,69) .106	06
(10,08) .397	(3,20) .126	(5,38) .212	08
	(3,71) .146	(4,88) .192	10
	(4,01) .158	(4,57) .180	12
(10,59) .417	(3,20) .126	(5,89) .232	14
	(3,71) .146	(5,38) .212	16
	(4,01) .158	(5,08) .200	18
(14,10) .555	(3,20) .126	(9,40) .370	20
	(3,71) .146	(8,89) .350	22
	(4,01) .158	(8,59) .338	24
(14,61) .575	(3,20) .126	(9,91) .390	26
	(3,71) .146	(9,40) .370	28
	(4,01) .158	(9,09) .358	30

(Metric Dimensions) Other pin lengths available upon request


Plating Options

- G = 10μ in gold in contact area, gold flash on tail
- GT = 10μ in gold in contact area, 200μ in tin/lead on tail
- H = 30μ gold on contact area, 200μ in tin/lead on tail
- T = 200μ in tin/lead over entire pin

Other plating options available upon request

Lock Tight Option



Two tails per strip are crimped in opposing directions on or near the centerline. Must have a minimum tail dimension of .090". Recommended hole size of .032".




Position for Polarization Option

001-100

Mates with: SSSH, SSSHR, SH, BSSH, SSSHSM, BSSHC

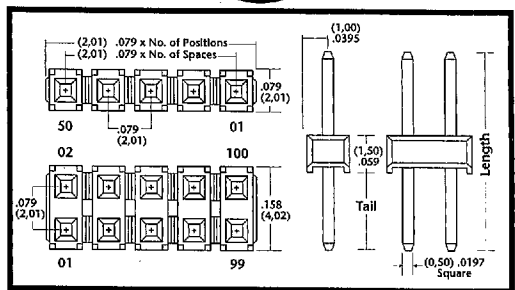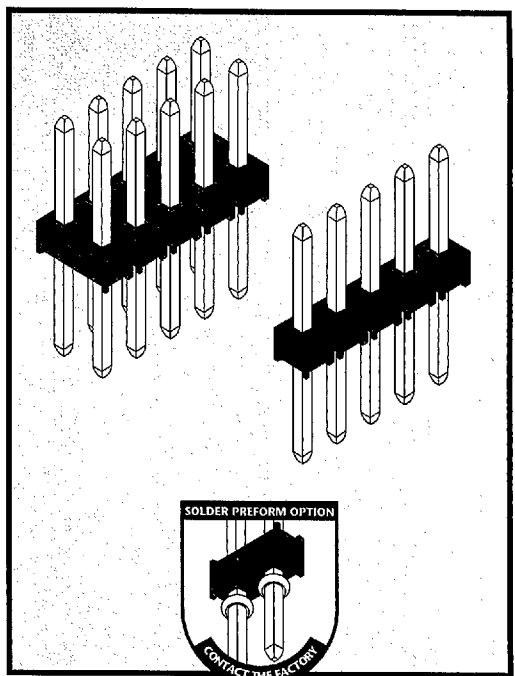

APPLICATION

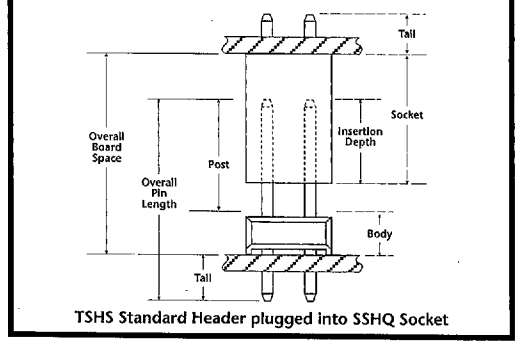

TSHS Standard Header plugged into SSHQ Socket

Product cut to specific sizes is noncancellable/nonreturnable. Parts are subject to change without notice.

Materials & Performance Specifications

	STANDARD	HIGH TEMPERATURE
Insulator	Black, glass filled, polyester	High temperature thermoplastic
Terminal	Phosphor Bronze	Phosphor Bronze
Insulation Resistance	5,000M Ω minimum	5,000M Ω minimum
Flammability	UL 94V-O	UL 94V-O
Temperature Range	-65°C to +125°C	-65°C to +250°C
Current Rating	2 ampere	2 ampere
Plating	All Plating Options over 50μ in Ni	All Plating Options over 50μ in Ni



Delivery On Time, Every Time... Or The Order's Free!

D 24F 9019296 0000039 728 Phone: 812-944-7244 • Facsimile: 812-944-7268 • Email: mle@iglou.com

2 mm