




# CONNECTORS MANUFACTURE


## 4.2mm Wafer Straight Type

### Specifications

Current Rating: 9A AC,DC  
 Voltage Rating: 600V AC,DC  
 Temperature Range: -25°C to +85°C  
 Contact Resistance: 10mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 1500V AC/minute  
 Terminal: Brass / Tin Plated  
 Material: Nylon 66,UL94V-2

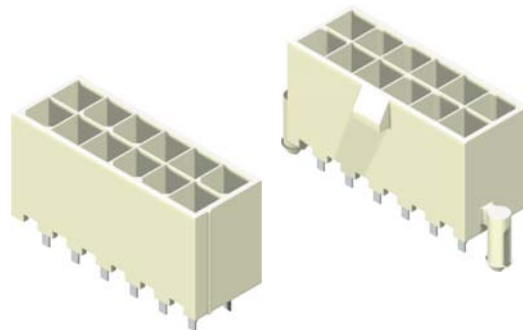

No. of Contacts	Dimensions	
	A	B
01	---	5.40
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40
07	25.20	30.60
08	29.40	34.80
09	33.60	39.00
10	37.80	43.20
11	42.00	47.40
12	46.20	51.60

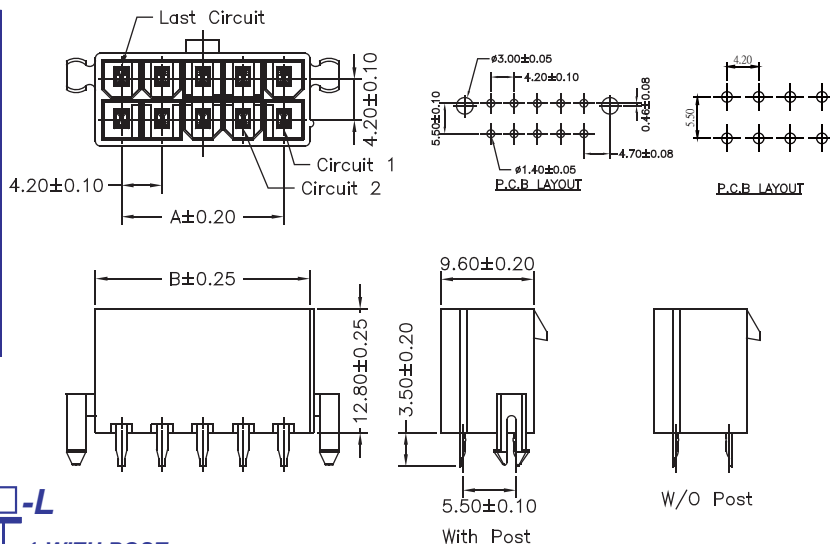


Part No.: 4200S-2XXTW□-L

1: WITH POST  
 2: W/O POST

### Specifications

Current Rating: 9A AC,DC  
 Voltage Rating: 600V AC,DC  
 Temperature Range: -25°C to +85°C  
 Contact Resistance: 10mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 1500V AC/minute  
 Terminal: Brass / Tin Plated  
 Material: Nylon 66,UL94V-2

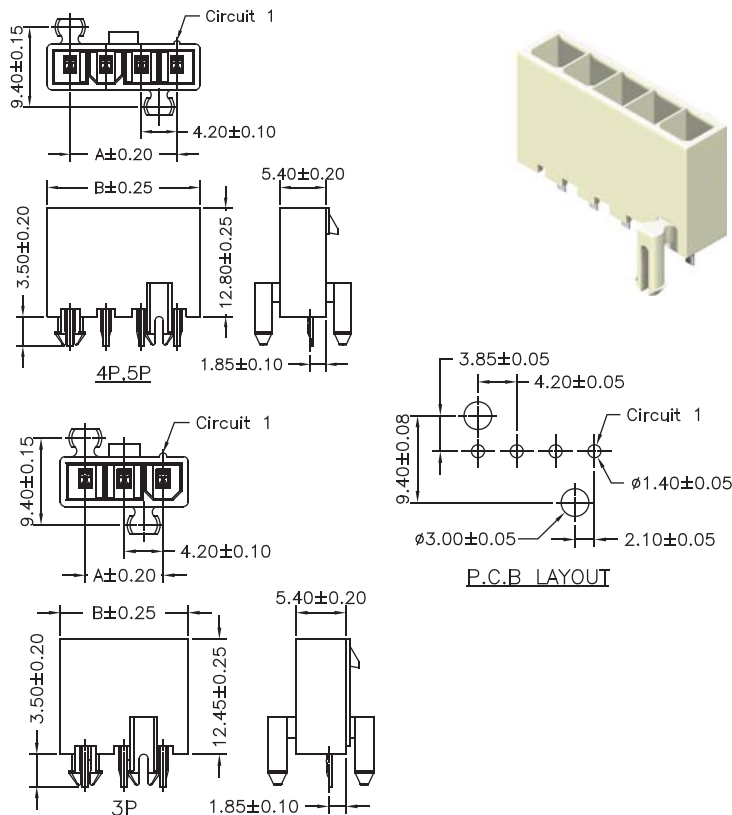

Part No.	Dimensions	
	A	B
4200S-103TW1-L	8.40	13.80
4200S-104TW1-L	12.60	18.00
4200S-105TW1-L	16.80	22.20

Part No.: 4200S-1XXTW1-L

Housing Wafer Terminal



ROHS