


2.54 SINGLE ROW SOCKET P.C.B. MOUNT RIGHT ANGLE TYPE

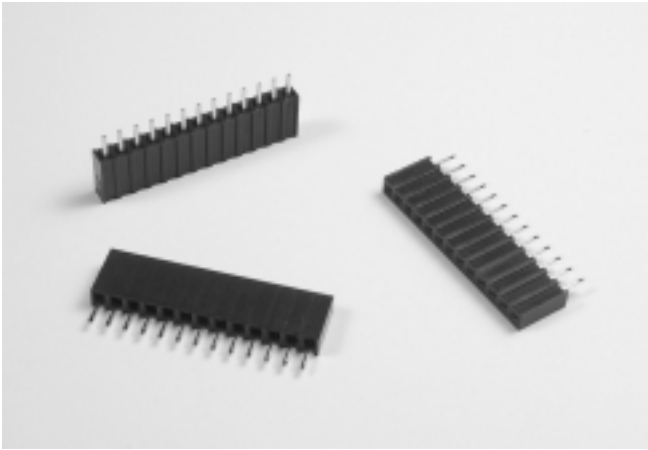


254210FS Series

Mates With SUYIN 254211, 254201, 254205 Series

Specifications:

- 1~28 Circuits
- Insulator Material : P.B.T UL94V-0
- Operating Temp. Range : -40°C To +105°C
- Terminal Material : Phosphor Bronze
- Plating : Gold Plated
- Max. Current Rating : 1.5A
- Max. Voltage Rating : 250V AC
- Dielectric Strength : 500V AC (Min. 60 Seconds)

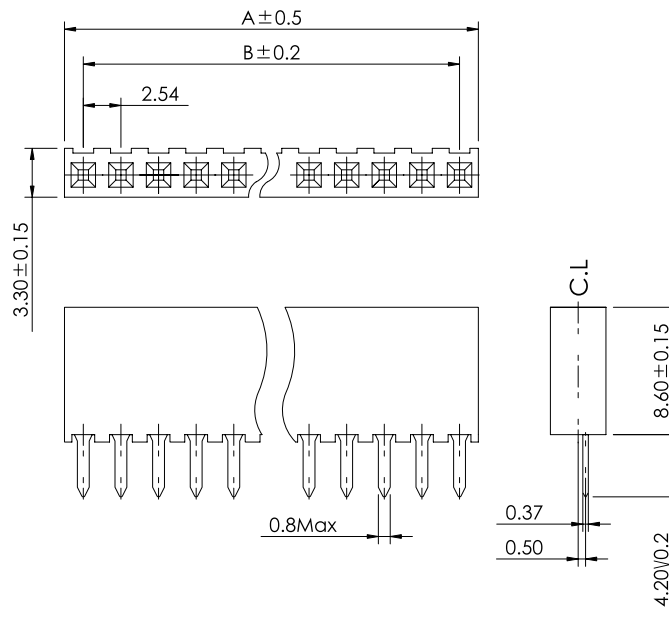

2.54
mm

Order Information


254210FS□□□□00ZU
1 2 3 4 5

1. 'S': Straight DIP Type
2. No. of Pins
3. Plating
4. Color 'Z': Black
5. Package

'U': Tube Package Without CAP

Reference Page 11

Recommended P.C.B. Layout

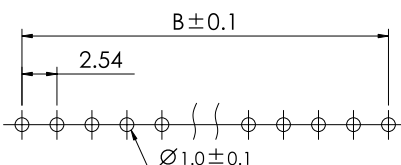

Dimension Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
254210FS001□□00ZU	3.14		254210FS015□□00ZU	38.70	35.56
254210FS002□□00ZU	5.68	2.54	254210FS016□□00ZU	41.24	38.10
254210FS003□□00ZU	8.22	5.08	254210FS017□□00ZU	43.78	40.64
254210FS004□□00ZU	10.76	7.62	254210FS018□□00ZU	46.32	43.18
254210FS005□□00ZU	13.30	10.16	254210FS019□□00ZU	48.86	45.72
254210FS006□□00ZU	15.84	12.70	254210FS020□□00ZU	51.40	48.26
254210FS007□□00ZU	18.38	15.24	254210FS021□□00ZU	53.94	50.80
254210FS008□□00ZU	20.92	17.78	254210FS022□□00ZU	56.48	53.34
254210FS009□□00ZU	23.46	20.32	254210FS023□□00ZU	59.02	55.88
254210FS010□□00ZU	26.00	22.86	254210FS024□□00ZU	61.56	58.42
254210FS011□□00ZU	28.54	25.40	254210FS025□□00ZU	64.10	60.96
254210FS012□□00ZU	31.08	27.94	254210FS026□□00ZU	66.64	63.50
254210FS013□□00ZU	33.62	30.48	254210FS027□□00ZU	69.18	66.04
254210FS014□□00ZU	36.16	33.02	254210FS028□□00ZU	71.72	68.58