


**BOX HEADER  
ID: 092**



STL 2-1 350VR pinheader with locking system

Series 730

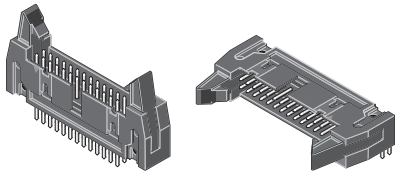

**TECHNICAL DATA**

Pitch	2,54 mm
Insulating Material	Thermoplast UL94V-0
Contact Material	copper alloy
Rated Current	3 Amp.
Rated Voltage	250 V <sub>AC/DC</sub>
Withstanding Voltage	500 V <sub>AC</sub> for one minute
Operating Temperature	-40°C to +105°C
Maximum Soldering Temperature	230°C for 5 seconds

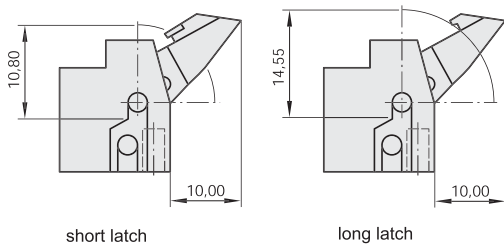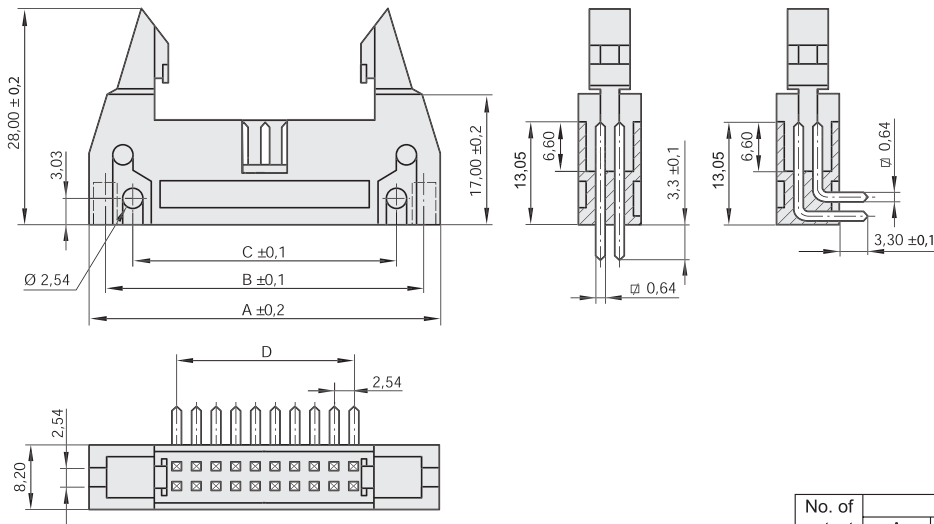

No. of contacts	Dimensions			
	A	B	C	D
10	32,00	27,94	21,04	10,17
14	37,08	33,02	26,12	15,25
16	39,62	35,56	28,66	17,79
20	44,70	40,64	33,74	22,87
26	52,32	48,26	41,36	30,49
30	57,40	53,34	46,44	35,57
34	62,48	58,42	51,52	40,65
36	65,02	60,96	54,06	43,19
40	70,10	66,04	59,14	48,27
50	82,80	78,74	71,84	60,97
60	95,50	91,44	84,56	73,67
64	100,58	96,52	89,62	78,75

All dimensions in mm.  
Other dimensions upon request.

**STL 2 - 1350 VR X X XX - XX L**

- 2: 2 rows
- 1350: height 13,50mm
- VR: with latch
- Type: K = short latch  
L = long latch  
O = without latch
- Version: G = straight contacts  
A = right angled contacts
- L: RoHS-compliant with standard temp. plastic
- Pins: see table
- Plating: GT = Sel. Au  
GG = Au

7 | 2,54 mm