
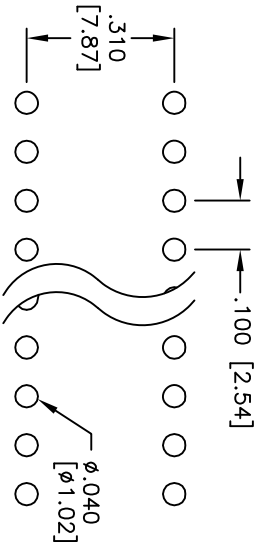


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/17/04	

APPROVED: _____
 DATE: _____ TITLE: _____

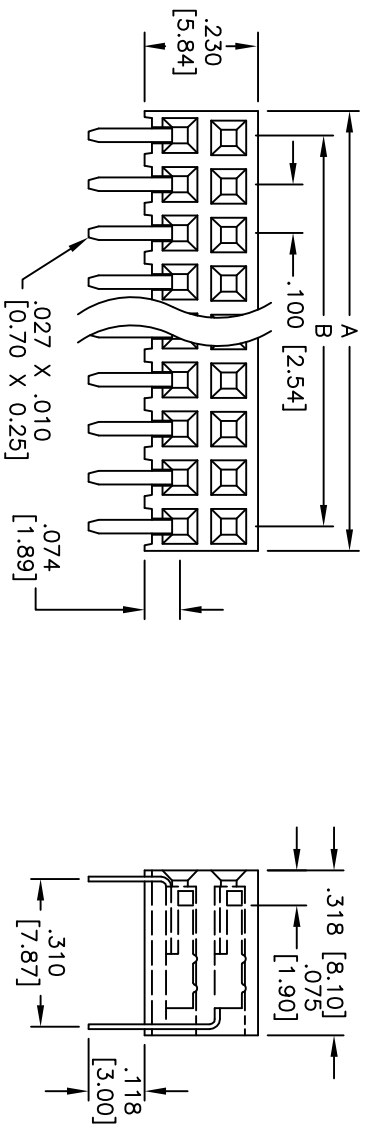

RECOMMENDED
PCB LAYOUT

A = .100 [2.54] X No. of Positions
 B = .100 [2.54] X No. of Spaces

SPECIFICATIONS:

- Material: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: 30u" Gold over Nickel underplate on contact area, Tin over Copper underplate on solder tails
- Electrical:
 - Operating voltage: 250 VAC max
 - Current rating: 3 Amps max
 - Insulation resistance: 5000 Mohms min @ 500 VDC
 - Dielectric withstanding voltage: 1000 VAC for 1 minute
- Temperature Rating:
 - Operating temperature: -40°C to +105°C
- Environmental:
 - Lead free, RoHS compliant.
 - Recommended soldering temp: 235°C for 5 sec.

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RECEPTACLE STRIP, 100 DUAL ROW
 SIDE ENTRY, 30u" SEL GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLE SIZE	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS		DATE	
DRAWN	SS	11/17/04	
CHECKED			
APPROVED			
SIZE		PART NO.	
X		RS2BR-XX-SG-30	
REF:		SCALE: NTS	
SHEET 1 OF 1		REV.	