
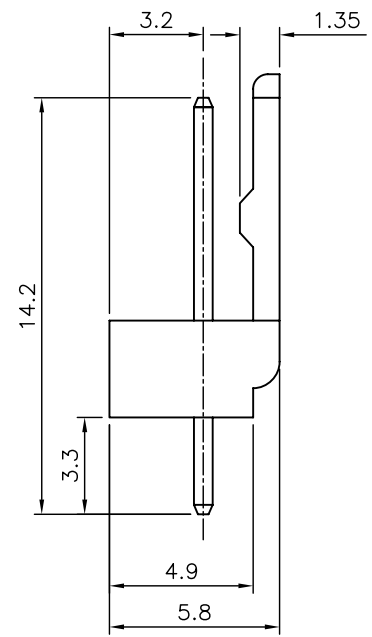
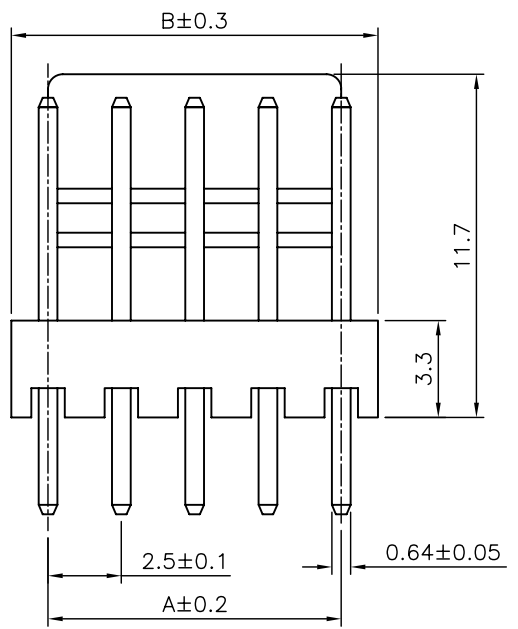
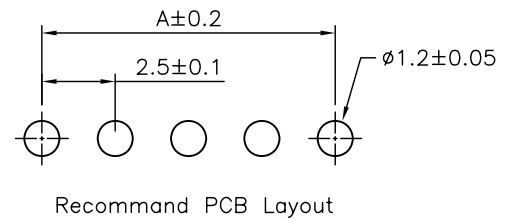


SPECIFICATION

Voltage Rating:250V AC/DC  
 Current Rating:3A AC/DC.  
 Withstanding Voltage:1000V AC/Minute.  
 Contact Resistance:20 Milliohms Max  
 Insulator Resistance:1000 Megohm Min  
 Temperature Range:-25°C To +85°C  
 Contact:Brass,Tin Plated.  
 Base:Nylon 66 UL94V-2  
 Q'ty:1,000 PCS./Bag

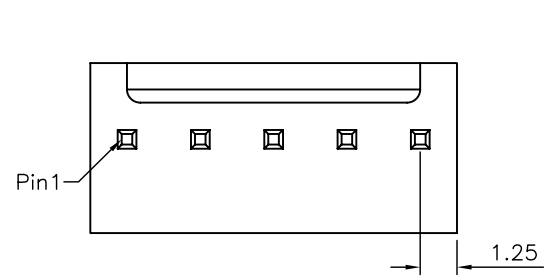

Poles	A	B
2	2.50	5.00
3	5.00	7.50
4	7.50	10.00
5	10.00	12.50
6	12.50	15.00
7	15.00	17.50
8	17.50	20.00
9	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.3 .XX ±0.2 .XXX ±0.1
PART No. RKXXD		MEI		
DRAWING No. RKXXD		CHECKED BY HZF		
SCALE NONE		DRAWING BY QZZ		
REV.	A1	UNIT mm		

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Drawing	HZF	02/04/2007
△ A0		NEW RELEASE		