

100364 Low Power 16-Input Multiplexer

General Description


The 100364 is a 16-input multiplexer. Data paths are controlled by four Select lines (S_0 – S_3). Their decoding is shown in the truth table. Output data polarity is the same as the selected input data. All inputs have 50 k Ω pulldown resistors.

- 2000V ESD protection
- Pin/function compatible with 100164
- Voltage compensated operating range = $-4.2V$ to $-5.7V$
- Available to industrial grade temperature range
- Standard Microcircuit Drawing (SMD) 5962-9459201

Features

- 35% power reduction of the 100164

Logic Symbol

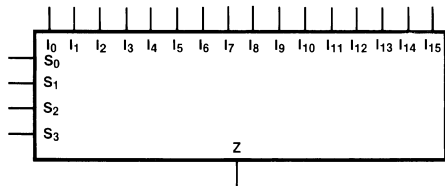


DS100301-1

Pin Names	Description
I_0 – I_{15}	Data Inputs
S_0 – S_3	Select Inputs
Z	Data Output


Connection Diagrams

24-Pin DIP

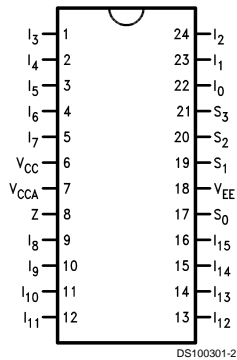


DS100301-2

24-Pin Quad Cerpak



DS100301-3

Logic Diagram

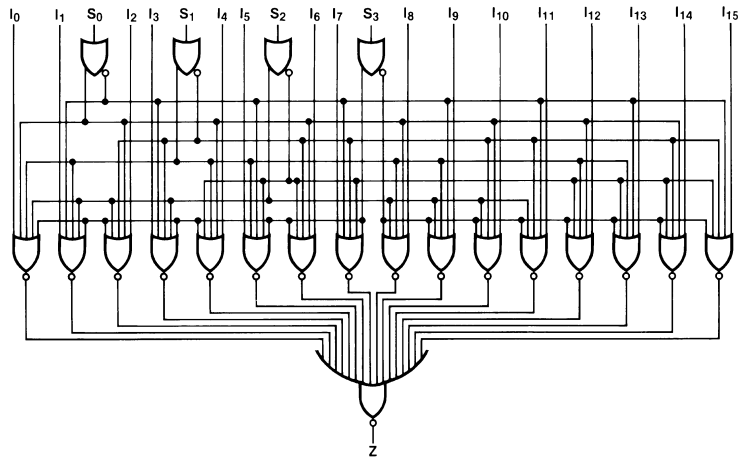

DS100301-5

Truth Table

Select Inputs				Output
S ₀	S ₁	S ₂	S ₃	Z
L	L	L	L	I ₀
H	L	L	L	I ₁
L	H	L	L	I ₂
H	H	L	L	I ₃
L	L	H	L	I ₄
H	L	H	L	I ₅
L	H	H	L	I ₆
H	H	H	L	I ₇
L	L	L	H	I ₈
H	L	L	H	I ₉
L	H	L	H	I ₁₀
H	H	L	H	I ₁₁
L	L	H	H	I ₁₂
H	L	H	H	I ₁₃
L	H	H	H	I ₁₄
H	H	H	H	I ₁₅

H = HIGH Voltage Level
L = LOW Voltage Level

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Above which the useful life may be impaired	
Storage Temperature (T_{STG})	-65°C to +150°C
Maximum Junction Temperature (T_J)	
Ceramic	+175°C
Pin Potential to	
Ground Pin (V_{EE})	-7.0V to +0.5V
Input Voltage (DC)	V_{EE} to +0.5V

Output Current	
(DC Output HIGH)	-50 mA
ESD (Note 2)	≥ 2000V

Recommended Operating Conditions

Case Temperature (T_C)	
Military	-55°C to +125°C
Supply Voltage (V_{EE})	-5.7V to -4.2V

Note 1: Absolute maximum ratings are those values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: ESD testing conforms to MIL-STD-883, Method 3015.

Military Version DC Electrical Characteristics

$V_{EE} = -4.2V$ to $-5.7V$, $V_{CC} = V_{CCA} = GND$, $T_C = -55^\circ C$ to $+125^\circ C$

Symbol	Parameter	Min	Max	Units	T_C	Conditions	Notes	
V_{OH}	Output HIGH Voltage	-1025	-870	mV	0°C to +125°C	$V_{IN} = V_{IH}$ (Max) or V_{IL} (Min)	Loading with 50Ω to -2.0V	(Notes 3, 4, 5)
		-1085	-870	mV	-55°C			
V_{OL}	Output LOW Voltage	-1830	-1620	mV	0°C to +125°C			
		-1830	-1555	mV	-55°C			
V_{OHC}	Output HIGH Voltage	-1035		mV	0°C to +125°C	$V_{IN} = V_{IH}$ (Min) or V_{IL} (Max)	Loading with 50Ω to -2.0V	(Notes 3, 4, 5)
		-1085		mV	-55°C			
V_{OLC}	Output LOW Voltage		-1610	mV	0°C to +125°C			
			-1555	mV	-55°C			
V_{IH}	Input HIGH Voltage	-1165	-870	mV	-55°C to +125°C	Guaranteed HIGH Signal for All Inputs	(Notes 3, 4, 5, 6)	
V_{IL}	Input LOW Voltage	-1830	-1475	mV	-55°C to +125°C	Guaranteed LOW Signal for All Inputs	(Notes 3, 4, 5, 6)	
I_{IL}	Input LOW Current	0.50		μA	-55°C to +125°C	$V_{EE} = -4.2V$ $V_{IN} = V_{IL}$ (Min)	(Notes 3, 4, 5)	
I_{IH}	Input HIGH Current		300	μA	0°C to +125°C	$V_{EE} = -5.7V$ $V_{IN} = V_{IH}$ (Max)	(Notes 3, 4, 5)	
			450	μA	-55°C			
I_{EE}	Power Supply Current	-95	-35	mA	-55°C to +125°C	Inputs Open	(Notes 3, 4, 5)	

Note 3: F100K 300 Series cold temperature testing is performed by temperature soaking (to guarantee junction temperature equals -55°C), then testing immediately without allowing for the junction temperature to stabilize due to heat dissipation after power-up. This provides "cold start" specs which can be considered a worst case condition at cold temperatures.

Note 4: Screen tested 100% on each device at -55°C, +25°C, and +125°C, Subgroups, 1, 2, 3, 7 and 8.

Note 5: Sampled tested (Method 5005, Table I) on each manufactured lot at -55°C, +25°C, and +125°C, Subgroups A1, 2, 3, 7 and 8.

Note 6: Guaranteed by applying specified input condition and testing V_{OH}/V_{OL} .

AC Electrical Characteristics

$V_{EE} = -4.2V$ to $-5.7V$, $V_{CC} = V_{CCA} = GND$

Symbol	Parameter	$T_C = -55^\circ C$		$T_C = 25^\circ C$		$T_C = +125^\circ C$		Units	Conditions	Notes
		Min	Max	Min	Max	Min	Max			
t_{PLH}	Propagation Delay	0.50	2.60	0.60	2.40	0.60	2.80	ns	Figures 1, 2	(Notes 7, 8, 9)
t_{PHL}	I_0 - I_{15} to Output									
t_{PLH}	Propagation Delay	0.70	3.30	0.90	3.10	1.00	3.50	ns		
t_{PHL}	S_0, S_1 to Output									
t_{PLH}	Propagation Delay	0.50	2.90	0.70	2.60	0.60	3.00	ns		
t_{PHL}	S_2, S_3 to Output									
t_{TLH}	Transition Time	0.20	1.20	0.20	1.20	0.20	1.20	ns		(Note 10)
t_{THL}	20% to 80%, 80% to 20%									


Note 7: F100K 300 Series cold temperature testing is performed by temperature soaking (to guarantee junction temperature equals $-55^\circ C$), then testing immediately without allowing for the junction temperature to stabilize due to heat dissipation after power-up. This provides "cold start" specs which can be considered a worst case condition at cold temperatures.

Note 8: Screen tested 100% on each device at $+25^\circ C$, temperature only, Subgroup A9.

Note 9: Sample tested (Method 5005, Table I) on each Mfg. lot at $+25^\circ C$, Subgroup A9, and at $+125^\circ C$, and $-55^\circ C$ temp., Subgroups A10 and A11.

Note 10: Not tested at $+25^\circ C$, $+125^\circ C$ and $-55^\circ C$ temperature (design characterization data).


Test Circuit

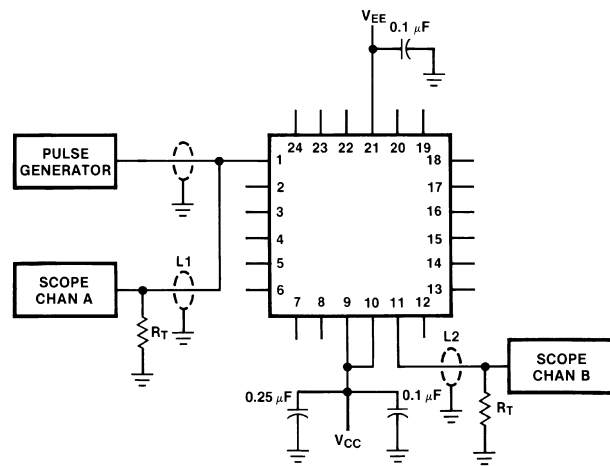

DS100301-6

FIGURE 1. AC Test Circuit

Switching Waveforms

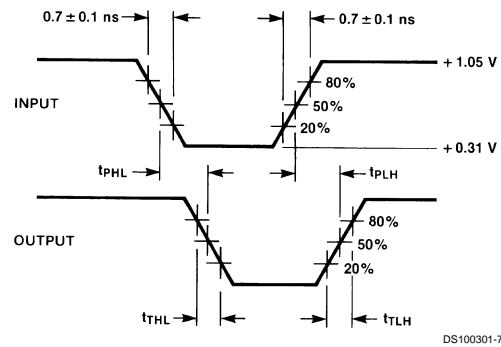

Note 11: $V_{CC}, V_{CCA} = +2V, V_{EE} = -2.5V$

Note 12: L1 and L2 = Equal length 50 Ω impedance lines

Note 13: $R_T = 50\Omega$ terminator internal to scope

Note 14: Decoupling 0.1 μF from GND to V_{CC} and V_{EE}

Note 15: All unused outputs are loaded with 50 Ω to GND


Note 16: C_L = Fixture and stray capacitance ≤ 3 pF

Note 17: Pin numbers shown are for flatpak; for DIP see logic symbol

DS100301-7


FIGURE 2. Propagation Delay and Transition Times

Physical Dimensions inches (millimeters) unless otherwise noted

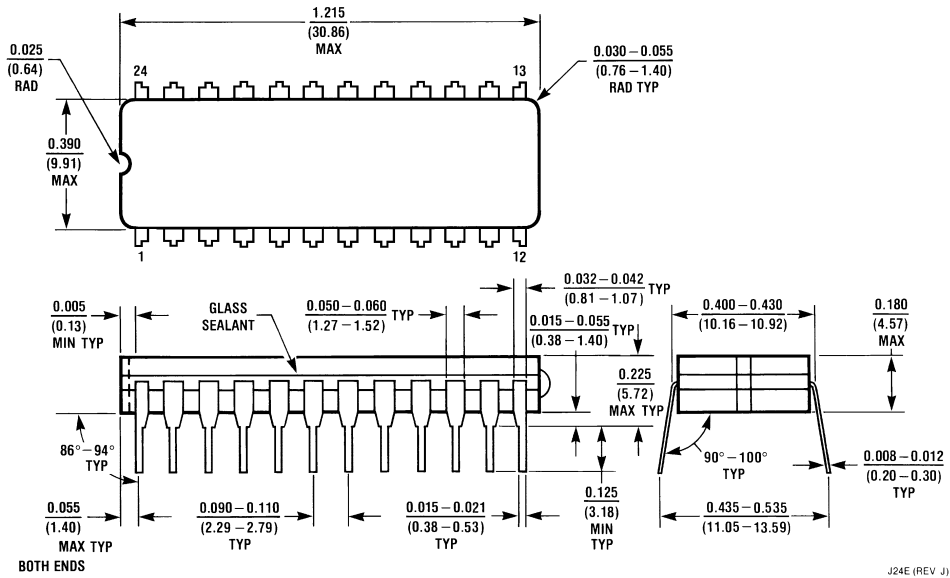

24-Lead Ceramic Dual-In-Line Package (0.400" Wide) (D)
NS Package Number J24E

J24E (REV J)

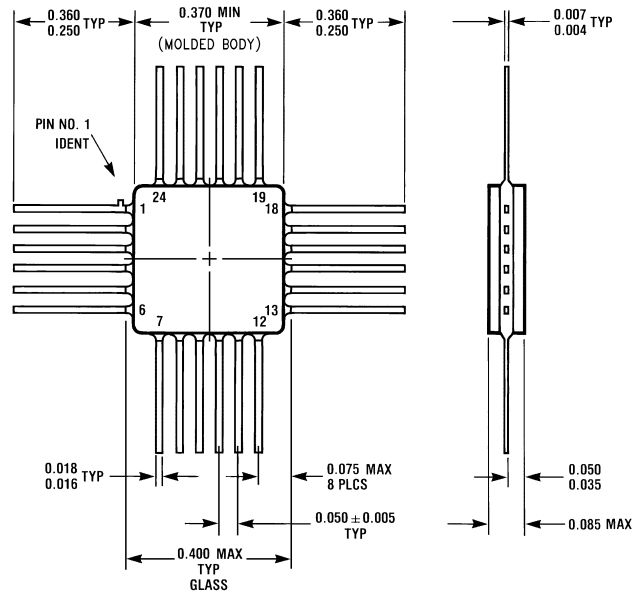

24-Lead Quad Cerpak (F)
NS Package Number W24B

W24B (REV D)

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.




National Semiconductor Corporation
Americas
Tel: 1-800-272-9959
Fax: 1-800-737-7018
Email: support@nsc.com

www.national.com

National Semiconductor Europe
Fax: +49 (0) 1 80-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 1 80-530 85 85
English Tel: +49 (0) 1 80-532 78 32
Français Tel: +49 (0) 1 80-532 93 58
Italiano Tel: +49 (0) 1 80-534 16 80

National Semiconductor Asia Pacific Customer Response Group
Tel: 65-2544466
Fax: 65-2504466
Email: sea.support@nsc.com

National Semiconductor Japan Ltd.
Tel: 81-3-5620-6175
Fax: 81-3-5620-6179

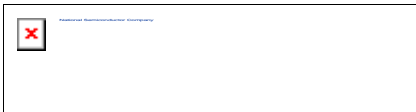

100364 Low Power 16-Input Multiplexer

Contents

- [General Description](#)
- [Features](#)
- [Datasheet](#)
- [Package Availability, Models, Samples & Pricing](#)

General Description




The 100364 is a 16-input multiplexer. Data paths are controlled by four Select lines (S_0 - S_3).

Their decoding is shown in the truth table. Output data polarity is the same as the selected input data. All inputs have 50 k Ohm pulldown resistors.

Features

- 35% power reduction of the 100164
 - 2000V ESD protection
 - Pin/function compatible with 100164
 - Voltage compensated operating range = -4.2V to -5.7V
 - Available to industrial grade temperature range
 - Standard Microcircuit Drawing (SMD) 5962-9459201
-

Datasheet

Title	Size (in Kbytes)	Date	 View Online	 Download	 Receive via Email
100364 Low Power 16-Input Multiplexer	124 Kbytes	2-Sep-98	View Online	Download	Receive via Email
100364 Mil-Aero Datasheet MN100364-X	105 Kbytes		View Online	Download	Receive via Email

Please use [Adobe Acrobat](#) to view PDF file(s).
If you have trouble printing, see [Printing Problems](#).

Package Availability, Models, Samples & Pricing

Part Number	Package		Status	Models		Samples & Electronic Orders	Budgetary Pricing		Std Pack Size	Package Marking
	Type	# pins		SPICE	IBIS		Quantity	\$US each		
5962-9459201MXA	Cerdip	24	Full production	N/A	N/A	.	50+	\$31.7000	tube of 15	[logo]ZS4A\$E 100364DMQB /Q 5962-9459201MXA
5962-9459201MYA	Cerquad	24	Full production	N/A	N/A	.	50+	\$36.7000	tube of 14	[logo]ZS4A Q\$E 100364 FMQB 5962 -9459201 MYA
5962-9459201VXA	Cerdip	24	Full production	N/A	N/A	.	50+	\$265.0000	tube of 15	[logo]ZS4A\$E 100364J-QMLV 5962-9459201VXA
5962-9459201VYA	Cerquad	24	Full production	N/A	N/A	.	50+	\$265.0000	tube of 14	[logo]ZS4A 100364W-QMLV 5962 -9459201 VYA \$E

[Information as of 1-Sep-2000]

Quick Search

[Parametric
Search](#)

[System
Diagrams](#)

[Product
Tree](#)

[Home](#)

[About Languages](#) . [About the Site](#) . [About "Cookies"](#)

National is [QS 9000 Certified](#) . [Privacy/Security](#)

[Copyright](#) © National Semiconductor Corporation

[Preferences](#) . [Feedback](#)