

MAJOR LEAGUE ELECTRONICS .100"c.l. Board Stacker Socket Strips - Custom - Using .025"sq. Pins





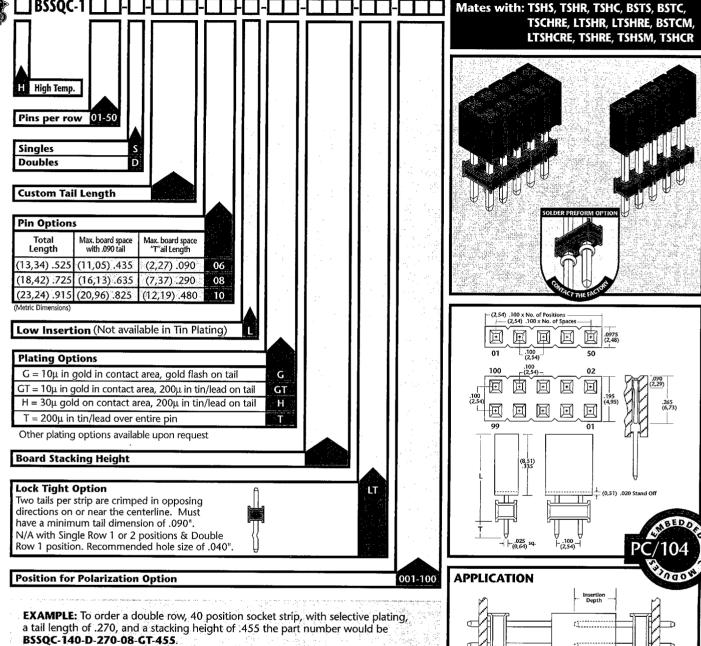

EXAMPLE: To order a single row, 20 position socket strip, tin plating, with a .500 stacking height and a .225 tail you would order a BSSQC-120-S-225-08-T-500.





Materials & Performance Specifications

Product cut to specific sizes is noncancellable/nonreturnable. Parts are subject to change without notice.

The state of the s		Taris are subject to change without house	
	STANDARD	HIGH TEMPERATURE	
Insulator	Black, glass filled, polyester	High temperature thermoplastic	
Terminal	Phosphor Bronze	Phosphor Bronze	
Insulation Resistance	5,000M Ω minimum	5,000M Ω minimum	
Flammability	UL 94V-O	UL 94V-O	
Temperature Range	-65°C to +125°C	-65°C to +250°C	
Current Rating	1 ampere	1 ampere	
Plating	All Plating Options over	All Plating Options over	
	50μ in Ni	50μ in Ni	