

VGA Connector

SPECIFICATIONS

Mechanical

Connector Mating Force: 5.1kg (11.24Lb) max.
Connector Un mating Force: 0.321kg (0.71Lb) min.
Durability: 500 Cycles


Electrical

Current Rating: 1.5A
Contact Resistance: 20mΩ max.
Dielectric Withstanding Voltage: 500V AC/1min min.
Insulation Resistance: 5000MΩ min.


Physical

Housing: Thermoplastic, UL 94V-0 rated in Black Color
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -55°C to +105°C
Recommended Thickness of PCB: 1.60[.063]

DZ Series
Right Angle Type, T/H
2.29mm [.090"] Pitch
15 Pos.

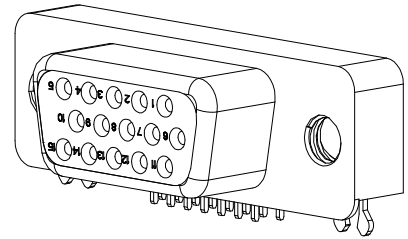

DRAWING

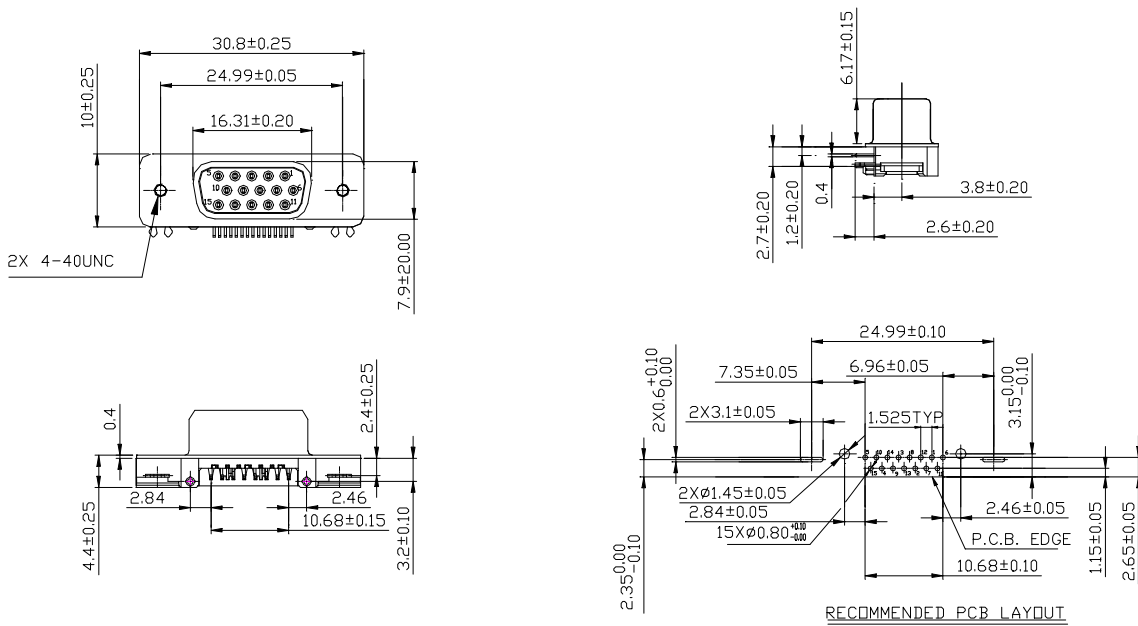

ORDERING INFORMATION

PRODUCT NO.: DZ 1 1 A 5 *- H8R0-4F

