


## Ultrafast Plastic Rectifier



### FEATURES

- Glass passivated chip junction
- Ultrafast reverse recovery time
- Low forward voltage drop
- Low leakage current
- Low switching losses, high efficiency
- High forward surge capability
- Solder Dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



### TYPICAL APPLICATIONS

For use in high frequency rectification and free-wheeling application in switching mode converters and inverters for consumer, computer and telecommunication.

### MECHANICAL DATA

**Case:** DO-201AD

Epoxy meets UL 94V-0 flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade

**Polarity:** Color band denotes cathode end

### MAJOR RATINGS AND CHARACTERISTICS

$I_{F(AV)}$	4.0 A
$V_{RRM}$	200 V
$I_{FSM}$	150 A
$t_{tr}$	25 ns
$V_F$	0.710 V
$T_j \text{ max.}$	175 °C

### MAXIMUM RATINGS ( $T_A = 25$ °C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	200	V
Working peak reverse voltage	$V_{RWM}$	200	V
Maximum DC blocking voltage	$V_{DC}$	200	V
Maximum average forward rectified current at $T_A = 80$ °C (see Fig. 1)	$I_{F(AV)}$	4.0	A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	$I_{FSM}$	150	A
Operating junction and storage temperature range	$T_J, T_{STG}$	- 65 to + 175	°C

<b>ELECTRICAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)				
PARAMETER	TEST CONDITIONS	SYMBOL	VALUE	UNIT
Maximum instantaneous forward voltage <sup>(1)</sup>	at 3.0 A, $T_J = 150\text{ }^\circ\text{C}$	$V_F$	0.710	V
	at 3.0 A, $T_J = 25\text{ }^\circ\text{C}$		0.875	
	at 4.0 A, $T_J = 25\text{ }^\circ\text{C}$		0.890	
Maximum instantaneous reverse current at rated DC blocking voltage <sup>(1)</sup>	$T_J = 25\text{ }^\circ\text{C}$	$I_R$	5.0	$\mu\text{A}$
	$T_J = 150\text{ }^\circ\text{C}$		150	
Maximum reverse recovery time	at $I_F = 0.5\text{ A}$ , $I_R = 1.0\text{ A}$ , $I_{rr} = 0.25\text{ A}$	$t_{rr}$	25	ns
Maximum reverse recovery time	at $I_F = 1.0\text{ A}$ , $di/dt = 50\text{ A}/\mu\text{s}$ , $V_R = 30\text{ V}$ , $I_{rr} = 10\% I_{RM}$	$t_{rr}$	35	ns
Maximum forward recovery time	$I_F = 1.0\text{ A}$ , $di/dt = 100\text{ A}/\mu\text{s}$ , Rec. to 1.0 V	$t_{fr}$	25	ns

**Note:**

(1) Pulse test:  $t_p = 300\text{ }\mu\text{s}$ , duty cycle  $\leq 2\%$

<b>THERMAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Typical thermal resistance junction to ambient <sup>(1)</sup>	$R_{\theta JA}$	28	$^\circ\text{C}/\text{W}$

**Note:**

(1) Lead length = 1/2" on P.C. board with 1/2" x 1/2" copper surface

<b>ORDERING INFORMATION</b>				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
MUR420-E3/54	1.138	54	1400	13" Diameter Paper Tape & Reel
MUR420-E3/73	1.138	73	1000	Ammo Pack Packaging

## RATINGS AND CHARACTERISTICS CURVES

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

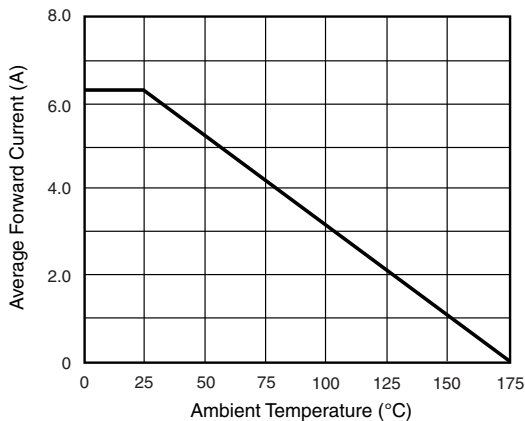


Figure 1. Forward Current Derating Curve

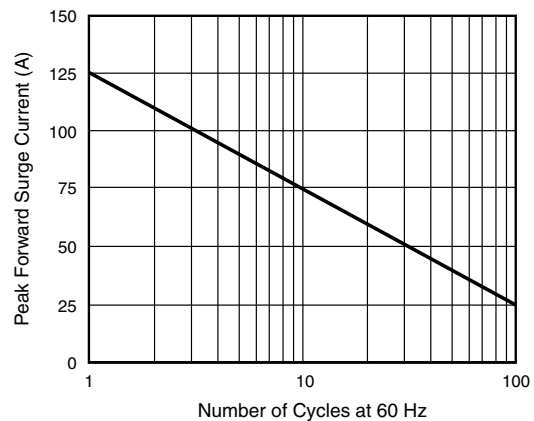


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

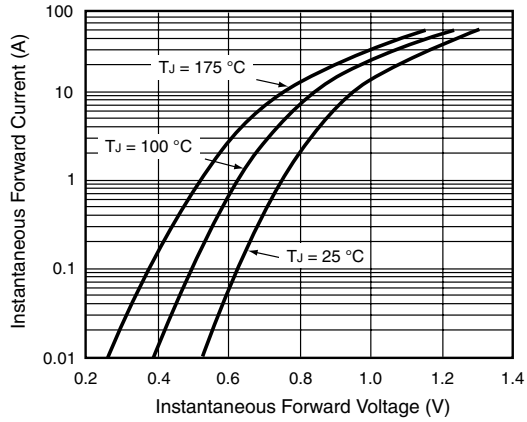


Figure 3. Typical Instantaneous Forward Characteristics

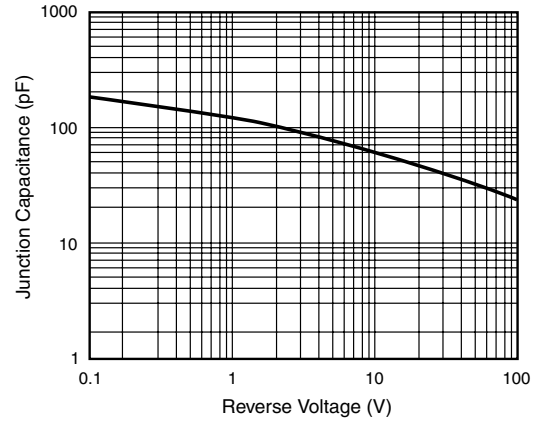


Figure 5. Typical Junction Capacitance


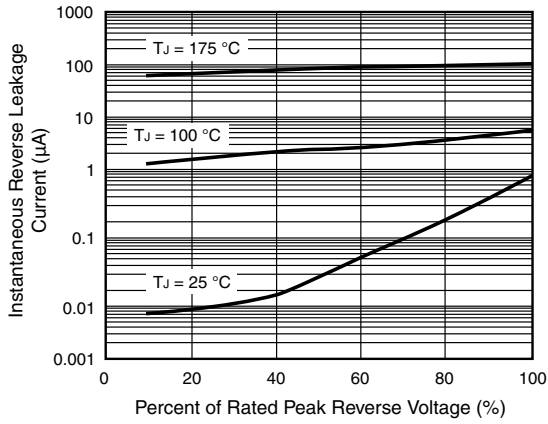


Figure 4. Typical Reverse Leakage Characteristics

**PACKAGE OUTLINE DIMENSIONS** in inches (millimeters)



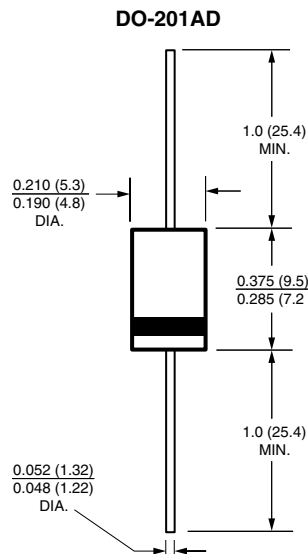

## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.