

2.54mm (0.1") Pin Housing

(Double Row)

DH2 Series



FEATURES

4-80 Circuits
 Contact Material: Copper alloy
 Applicable wires: AWG # 22 to 28
 Housing Material: Nylon, UL 94V-0

SPECIFICATIONS



Current Rating: 3A AC, DC
 Voltage Rating: 250V AC Maximum
 Temperature Range: -25°C~+90°C
 Contact Resistance: 20 m ohm Max
 Insulation Resistance: 1000 M ohm min
 Withstand Voltage: 1000V AC/minute

Contact

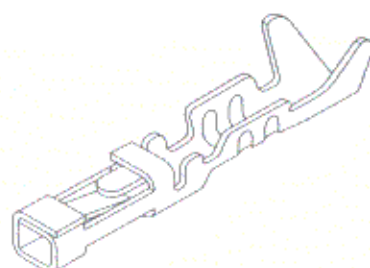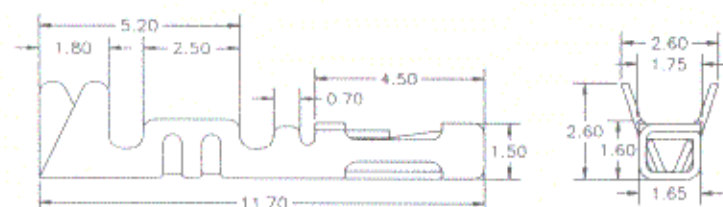

Model No.	Applicable Wire			Material	Finish
	mm ²	AWG #	Insulation O.D.		
DH-C-0	0.2 to 0.08	24 to 28	1.5 to 1.0	Phosphor Bronze	Tin-Plated

Housing

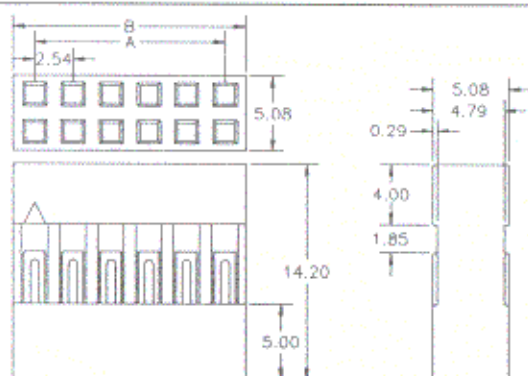

Circuits	Model No.	Dimension mm	
		A	B
4	DH2-H-4	2.54	5.08
6	DH2-H-6	5.08	7.62
8	DH2-H-8	7.62	10.16
10	DH2-H-10	10.16	12.70
12	DH2-H-12	12.70	15.24
14	DH2-H-14	15.24	17.78
16	DH2-H-16	17.78	20.32
18	DH2-H-18	20.32	22.86
20	DH2-H-20	22.86	25.40
22	DH2-H-22	25.40	27.94
24	DH2-H-24	27.94	30.48
26	DH2-H-26	30.48	33.02
28	DH2-H-28	33.02	35.56

Circuits	Model No.	Dimension mm	
		A	B
30	DH2-H-30	35.56	38.10
32	DH2-H-32	38.10	40.64
34	DH2-H-34	40.64	43.18
36	DH2-H-36	43.18	45.72
38	DH2-H-38	45.72	48.26
40	DH2-H-40	48.26	50.80
42	DH2-H-42	50.80	53.34
44	DH2-H-44	53.34	55.88
46	DH2-H-46	55.88	58.42
48	DH2-H-48	58.42	60.96
50	DH2-H-50	60.96	63.50
52	DH2-H-52	63.50	66.04
54	DH2-H-54	66.04	68.58

Circuits	Model No.	Dimension mm	
		A	B
56	DH2-H-56	68.58	71.12
58	DH2-H-58	71.12	73.66
60	DH2-H-60	73.66	76.20
62	DH2-H-62	76.20	78.74
64	DH2-H-64	78.74	81.28
66	DH2-H-66	81.28	83.82
68	DH2-H-68	83.82	86.36
70	DH2-H-70	86.36	88.90
72	DH2-H-72	88.90	91.44
74	DH2-H-74	91.44	93.98
76	DH2-H-76	93.98	96.52
78	DH2-H-78	96.52	99.06
80	DH2-H-80	99.06	101.60

SINGATRON ENT. CO., LTD. Tel.: (909) 464-1883 Fax.: (909) 464-1884