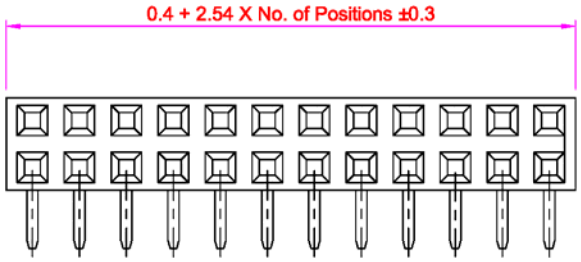

Recommended P.C. Board Hole Layout



SPECIFICATIONS

Current Rating:	3 Amps
Contact Material:	Brass
Contact Resistance:	20m ohms max.
Insulator Material:	Polyester, UL94V-0
Insulation Resistance:	1000 Megohms min.
Withstanding:	AC 500V
Operating Temp:	-40ºC ~ +105ºC

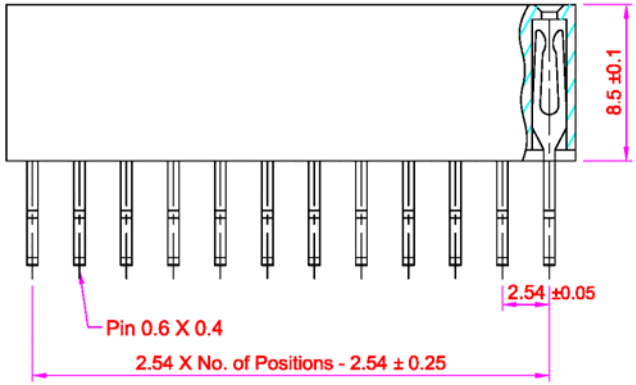



Series	Type	Positions	Plating
ARS	X	XX	XX
Receptacle Strip .100" X .100"	1=Single Row Straight 2=Single Row R/A 3=Double Row Straight 4=Double Row R/A	Single Row 1-40 Double Row 2-80	TN=Tin SGXX=Selective Gold GDXX=Gold XX=Flash if blank 15,30,50u"

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	09/26/08
				Checked	Lizzy	09/26/08
				Drawn	Tina	09/26/08
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3'
				UNIT: mm		

Central Components Manufacturing
440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **ARS-04-XX-XX**

Description: Receptacle Strip, double row, right angle