


塑封高效率整流二极管  
反向电压 400 --- 600 V  
正向电流 2.0 A

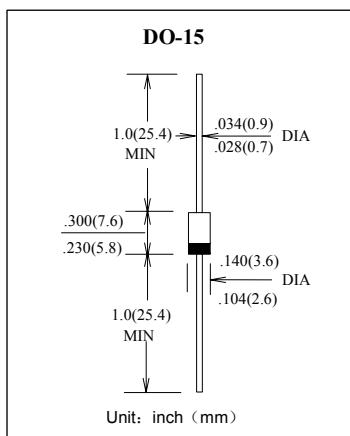

# MUR240 ..... MUR260

Plastic High-Efficiency Rectifiers  
Reverse Voltage 400 to 600V  
Forward Current 2.0A

## 特征 Features

- 低的反向漏电流 Low reverse leakage
- 较强的正向浪涌承受能力 High forward surge capability
- 高温焊接保证 High temperature soldering guaranteed:  
250°C/10 秒, 0.375" (9.5mm)引线长度。
- 250°C/10 seconds, 0.375" (9.5mm) lead length,
- 引线可承受5 磅 (2.3kg) 拉力。5 lbs. (2.3kg) tension

## 机械数据 Mechanical Data

- 端子: 镀锡轴向引线 Terminals: Plated axial leads
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	MUR240	MUR260	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	400	600	V
最大均方根电压 Maximum RMS voltage	V <sub>RMS</sub>	280	420	V
最大直流阻断电压 Maximum DC blocking voltage	V <sub>DC</sub>	400	600	V
平均整流输出电流 Average Rectified Output Current T <sub>A</sub> =120°C	I <sub>O</sub>	2.0		A
峰值正向浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I <sub>FSM</sub>	45		A
最大反向峰值电流 @TA=75°C Maximum peak reverse current full cycle	I <sub>R(AV)</sub>	30		μA
典型热阻 Typical thermal resistance	R <sub>θJA</sub>	45		°C/W
工作结温和存储温度 Operating junction and storage temperature range	T <sub>j</sub> , T <sub>TG</sub>	-50 --- +150		°C

电特性 TA = 25°C 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	MUR240	MUR260	单位 Unit
最大正向电压 Maximum forward voltage I <sub>F</sub> =2.0A	V <sub>FM</sub>	1.30	1.35	V
最大反向电流 T <sub>A</sub> = 25°C Maximum reverse current T <sub>A</sub> =150°C	I <sub>RM</sub>	5.0 150		μA
最大反向恢复时间 I <sub>F</sub> =0.5A I <sub>R</sub> =1.0A I <sub>RR</sub> =0.25A MAX. Reverse Recovery Time	trr	50	75	nS
典型结电容 Type junction capacitance V <sub>R</sub> =4.0V f = 1.0MHz	C <sub>j</sub>	60		pF

## 特性曲线 Characteristic Curves

