


LGH

TE Internal #: 5-861258-1 Circular Power Connectors, Lead Assembly, 50000 VDC, Wire-to-Wire, Wire & Cable, Receptacle, Socket, -55 – 125 °C [-67 – 257 °F], Package

View on TE.com >



Connectors > Power Connectors > Circular Power > Circular Power Connectors



Connector Product Type: Lead Assembly

Operating Voltage: 50000 VDC

Connector System: Wire-to-Wire

Sealable: No

Connector & Contact Terminates To: Wire & Cable

Features

Product Type Features

Connector Seal & Plug Type

Connector Product Type

Connector System

Hermetically Sealed

Lead Assembly

Wire-to-Wire

Sealable	No
Connector & Contact Terminates To	Wire & Cable
Connector & Housing Type	Receptacle
Electrical Characteristics	
Operating Voltage	50000 VDC
Body Features	
Positive Stop Ferrule	Without
Product Weight	47.8 g[1.68 oz]
Contact Features	
Contact Type	Socket
Mechanical Attachment	
Panel Mount Feature Type	Flange
Dimensions	
Assembly Length	54.35 mm[2.14 in]

5-861258-1

Circular Power Connectors, Lead Assembly, 50000 VDC, Wire-to-Wire, Wire & Cable, Receptacle, Socket, -55 – 125 °C [-67 – 257 °F], Package



Usage Conditions

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Shielded	No
Packaging Features	
Packaging Quantity	1
Packaging Method	Package
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Pb (4% in Contact/Component) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.

Not applicable for solder process capability

Halogen Content

Solder Process Capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Customers Also Bought

5-861258-1

Circular Power Connectors, Lead Assembly, 50000 VDC, Wire-to-Wire, Wire & Cable, Receptacle, Socket, -55 – 125 °C [-67 – 257 °F], Package



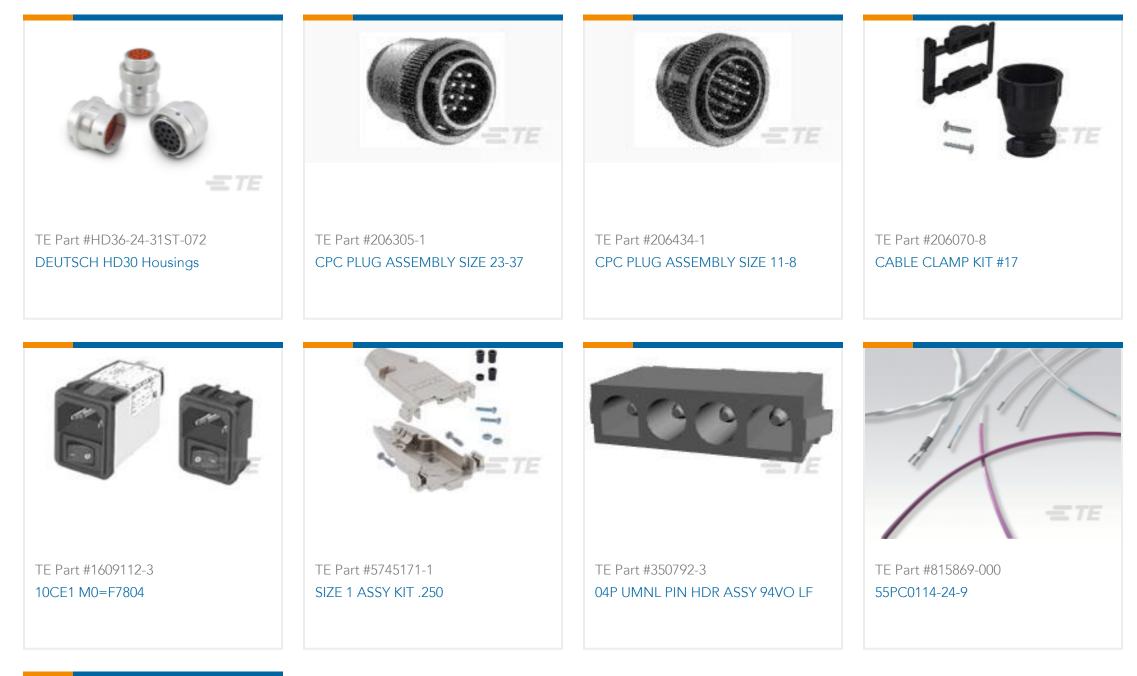



Documents

Product Drawings LGH 4 FLG RECEPT MKD

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-861258-1_AF.2d_dxf.zip

English

Customer View Model ENG_CVM_CVM_5-861258-1_AF.3d_igs.zip

- - - -

English

Customer View Model

ENG_CVM_CVM_5-861258-1_AF.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

C For support call+1 800 522 6752

5-861258-1

Circular Power Connectors, Lead Assembly, 50000 VDC, Wire-to-Wire, Wire & Cable, Receptacle, Socket, -55 – 125 °C [-67 – 257 °F], Package



Product Specification

English