NECTOR | NECTOR M Series

TE Internal #: 1-293476-2


Standard Circular Connectors, Wire-to-Wire, Wire & Cable, Power,

Pin, -40 – 158 °F [-40 – 70 °C], NECTOR M Series

View on TE.com >



Connectors > Circular Connectors > Standard Circular Connectors

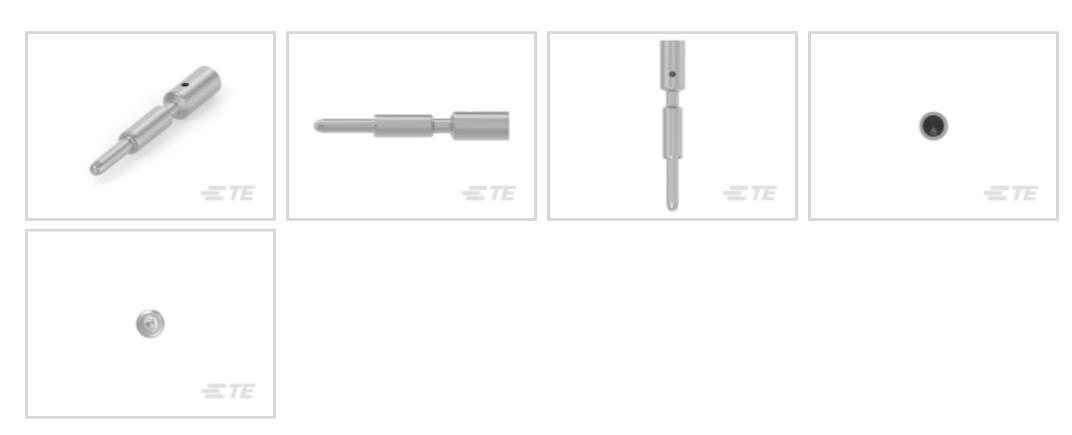

Connector System: Wire-to-Wire

Sealable: No

Connector & Contact Terminates To: Wire & Cable

Circuit Application: **Power**Hermetically Sealed: **No**

Features

Product Type Features

Troduct Typo reatures	
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Contacts Preloaded	No
Body Features	
Environmental Protection	Without
Hermetically Sealed	No
Contact Features	
Circular Connector Contact Type	Pin
Mechanical Attachment	
Mating Alignment	Without

Without

Mating Retention



Operating Temperature Range	-40 – 70 °C[-40 – 158 °F]
Operation/Application	
Circuit Application	Power
Shielded	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Pb (1.6% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts






Also in the Series | NECTOR M Series

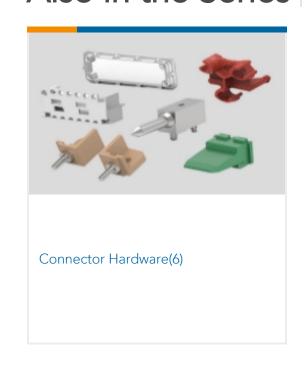





Rectangular Power Connectors(2)

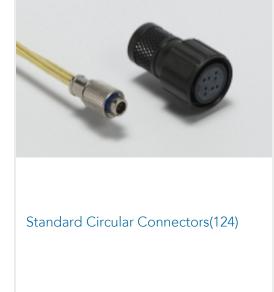

Customers Also Bought





TE Part #293252-3 NECTOR X PIN HSG, FREE HANGING 4P

Documents

Product Drawings

NECTOR M PIN CTC BRASS TIN PLTD

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-293476-2_H.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-293476-2_H.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-293476-2_H.3d_stp.zip

Standard Circular Connectors, Wire-to-Wire, Wire & Cable, Power, Pin, -40 – 158 °F [-40 – 70 °C], NECTOR M Series



English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Agency Approvals

Agency Approval Document

English

Agency Approval Document

English

Agency Approval Document

English