HFT5000-70/35-0-SP ✓ ACTIVE



RAYCHEM | RAYCHEM HFT5000

TE Internal #: 7480624003

Black, 2:1, Shrinks To 1.378 in [35 mm], Polyethylene/Polyester, Fiber & Fabric Wall Material, 2.756 in [70 mm] Inner Diameter,

RAYCHEM HFT5000

View on TE.com >



Heat Shrink Tubing > HFT5000 Heat Shrink Tubing





Primary Product Color: Black Wall Material Type: Fiber & Fabric

Expanded Inside Diameter (Min): 70 mm [2.756 in] Recovered Inside Diameter (Max): 35 mm [1.378 in]

Shrink Ratio: 2:1

All HFT5000 Heat Shrink Tubing (128)

Features

Product Type Features

| Wall Material Type | Fiber & Fabric |
|---------------------------------|---|
| Body Features | |
| Fluid Type | Antifreeze, Battery Acid, Brake Fluid, Car Wash Detergent, Diesel Fuel, Hydraulic Fluid, Lubricating Oil, Unleaded Gasoline |
| Primary Product Color | Black |
| Shrink Ratio | 2:1 |
| Primary Product Material | Polyethylene/Polyester |
| Flexibility | Very Flexible |
| Dimensions | |
| Expanded Inside Diameter (Min) | 70 mm[2.756 in] |
| Recovered Inside Diameter (Max) | 35 mm[1.378 in] |
| Tubing Size Range | 35 – 70 mm[1.378 – 2.756 in] |
| Usage Conditions | |
| Shrink Temperature (Min) | 80 °C |
| Tubing Flammability Type | Non-Flame-Retardant |



| Operating Temperature Range | -40 – 125 °C |
|-----------------------------|---|
| Recovery Temperature | 110 °C |
| Operation/Application | |
| Mechanical Resistance | Abrasion, Cut-Through, Flexing, Mechanical Damage, Vibration |
| Product Availability | |
| Applicable Region | Global |
| Packaging Features | |
| Packaging Method | Spool |
| Other | |
| Product Source | Czech Republic |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant |
|---|--|
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach




Compatible Parts



Also in the Series | RAYCHEM HFT5000

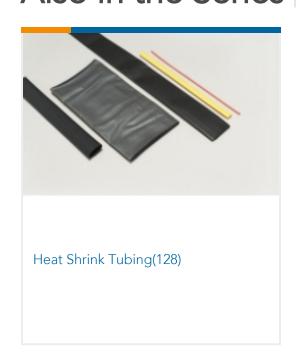

Customers Also Bought

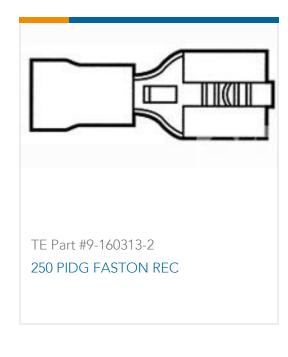







Documents

Product Drawings
HFT5000-70/35-0-SP

English

Datasheets & Catalog Pages

Measuring_Single_Wall_Tubing

English

HFT5000 Pages from 9-1773447-9

English

Selecting_Correct_Tubing_1216

English

Product Specifications

Black, 2:1, Shrinks To 1.378 in [35 mm], Polyethylene/Polyester, Fiber & Fabric Wall Material, 2.756 in [70 mm] Inner Diameter, RAYCHEM HFT5000



Application Specification

English

Agency Approvals

UL

English