


### FEATURES

- Low leakage, low zener impedance at low current
- Maximum power dissipation of 1W is ideally suited for stabilized power supply, etc.
- High temperature soldering guaranteed: 260°C/10 seconds at terminals




### SMA(DO-214AC)

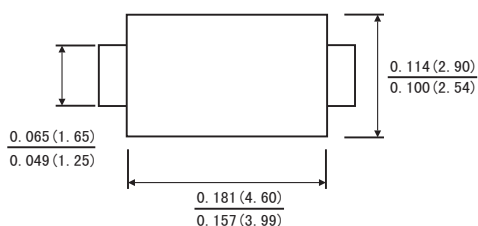

### MECHANICAL DATA

- Case: JEDEC DO-214AC package are upon request.
- Terminals: Solder plated
- Polarity: Color band denotes cathode end

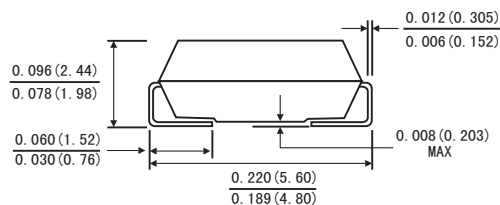

Dimensions in inches and (millimeters)

### ABSOLUTE MAXIMUM RATINGS(LIMITING VALUES) (TA=25°C)

	Symbols	Value	Units
Zener current see table "Characteristics"			
Power dissipation	P <sub>D</sub>	1	W
Junction temperature	T <sub>J</sub>	150	°C
Storage temperature range	T <sub>STG</sub>	-55 to +150	°C

### ELECTRICAL CHARACTERISTICS (TA=25°C)

	Symbols	Min	Typ	Max	Units
Thermal resistance junction to ambient	R <sub>θJA</sub>			100	°C/W
Forward voltage at I <sub>F</sub> =200mA	V <sub>F</sub>			1.2	V

# SMA4728A... PLASTIC PACKAGE ZENER DIODES

## Electrical Characteristics (T<sub>A</sub>=25<sup>0</sup>C Unless otherwise specified)

Part Number	Zener Voltage		Dynamic impedance	Knee current	Knee impedance	Reverse current	Reverse voltage	Max. DC current
	VZ	IZT	ZZT@IZT	IZK	ZZK@IZK	IR(Max.)	@VR	IZM
	V	m A	Ω	m A	Ω	μA	V	m A
SMA4728A	3.3	76.0	10.0	1	400	100	1.0	276
SMA4729A	3.6	69.0	10.0	1	400	100	1.0	252
SMA4730A	3.9	64.0	9.0	1	400	50	1.0	234
SMA4731A	4.3	58.0	9.0	1	400	10	1.0	217
SMA4732A	4.7	53.0	8.0	1	500	10	1.5	193
SMA4733A	5.1	49.0	7.0	1	550	10	2.0	178
SMA4734A	5.6	45.0	5.0	1	600	10	3.0	162
SMA4735A	6.2	41.0	2.0	1	700	10	4.0	146
SMA4736A	6.8	37.0	3.5	1	700	10	5.2	133
SMA4737A	7.5	34.0	4.0	0.5	700	10	6.0	121
SMA4738A	8.2	31.0	4.5	0.5	700	10	6.5	110
SMA4739A	9.1	28.0	5.0	0.5	700	10	7.0	100
SMA4740A	10	25.0	7.0	0.25	700	10	8.0	91
SMA4741A	11	23.0	8.0	0.25	700	5	8.4	83
SMA4742A	12	21.0	9.0	0.25	700	5	9.1	76
SMA4743A	13	19.0	10.0	0.25	700	5	9.9	69
SMA4744A	15	17.0	14.0	0.25	700	5	11.4	61
SMA4745A	16	15.5	16.0	0.25	700	5	12.2	57
SMA4746A	18	14.0	20.0	0.25	750	5	13.7	50
SMA4747A	20	12.5	22.0	0.25	750	5	15.2	45
SMA4748A	22	11.5	23.0	0.25	750	5	16.7	41
SMA4749A	24	10.5	25.0	0.25	750	5	18.2	38
SMA4750A	27	9.5	35.0	0.25	750	5	20.6	34
SMA4751A	30	8.5	40.0	0.25	1000	5	22.8	30
SMA4752A	33	7.5	45.0	0.25	1000	5	25.1	27

## SMA4728A... PLASTIC PACKAGE ZENER DIODES

Part Number	Zener Voltage		Dynamic impedance	Knee current	Knee impedance	Reverse current	Reverse voltage	Max. DC current
	VZ	IZT	ZZT@IZT	IZK	ZZK@IZK	IR(Max.)	@VR	IZM
	V	m A	$\Omega$	m A	$\Omega$	$\mu$ A <sub>dc</sub>	V	m A
SMA4753A	36	7.0	50.0	0.25	1000	5	27.4	25
SMA4754A	39	6.5	60.0	0.25	1000	5	29.7	23
SMA4755A	43	6.0	70.0	0.25	1500	5	32.7	22
SMA4756A	47	5.5	80.0	0.25	1500	5	35.8	19
SMA4757A	51	5.0	95.0	0.25	1500	5	38.8	18
SMA4758A	56	4.5	110.0	0.25	2000	5	42.6	16
SMA4759A	62	4.0	125.0	0.25	2000	5	47.1	14
SMA4760A	68	3.7	150.0	0.25	2000	5	51.7	13
SMA4761A	75	3.3	175.0	0.25	2000	5	56.0	12
SMA4762A	82	3.0	200.0	0.25	3000	5	62.2	11
SMA4763A	91	2.8	250.0	0.25	3000	5	69.2	10
SMA4764A	100	2.5	350.0	0.25	3000	5	76.0	9

Suffix "A" is for  $\pm 5\%$  tolerance.

# SMA4728A... PLASTIC PACKAGE ZENER DIODES

## RATINGS AND CHARACTERISTIC CURVES

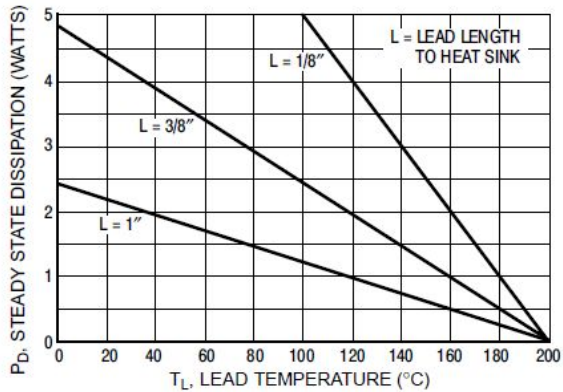


Figure 1. Power Temperature Derating Curve

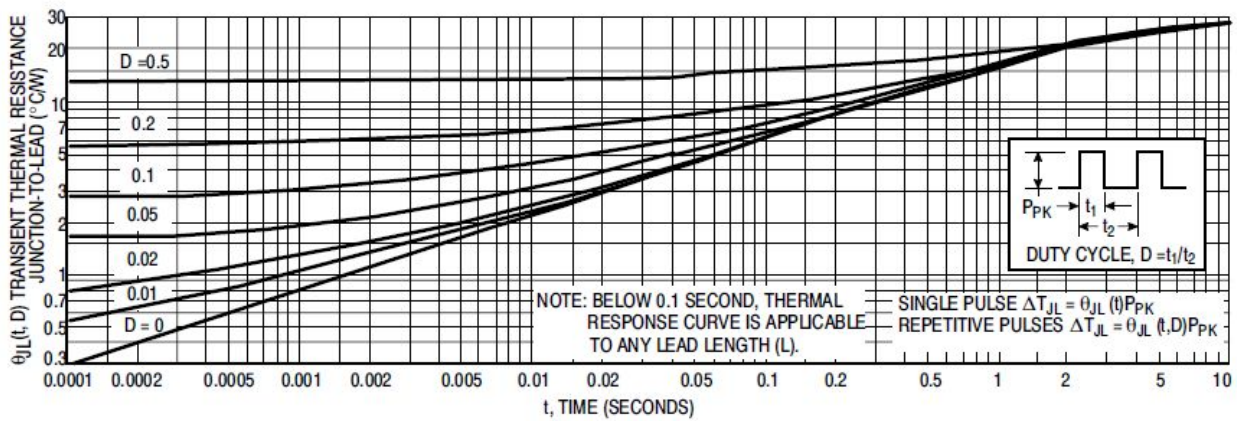


Figure 2. Typical Thermal Response L, Lead Length = 3/8 Inch

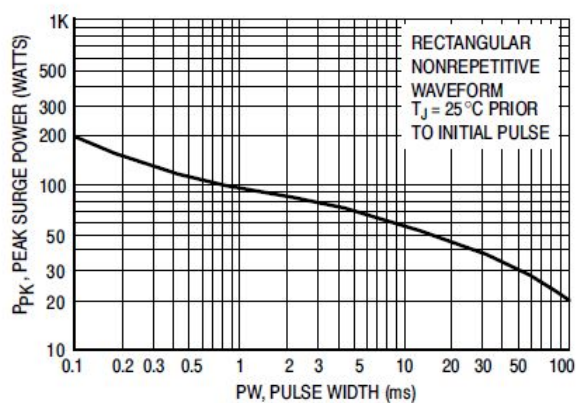


Figure 3. Maximum Surge Power

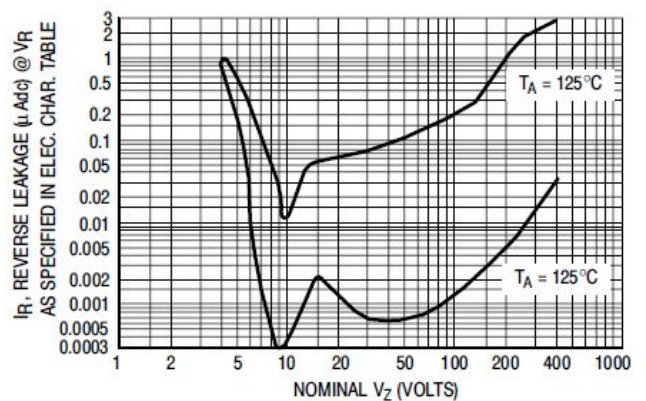


Figure 4. Typical Reverse Leakage