



PST

Programmable Scene Timer

Features

- * For DALI System
- * Programmed by iDALI App
- * Powered by DALI Bus
- * Up to 16 Programmable Schedules
- * Repeatably Weekly Schedule Available
- * Automatic Time Sync While Connected to App




Specifications

1. Power input via DALI bus: 10.5-22.5Vdc
2. Current draw: 10mA from DALI
3. Operating Temperature: 0~50°C
4. Connecting Wire Cross Section 0.5~1.5 mm²

Note:

1. PST is required to work with BD5T and iDALI App.
2. PST can only work together with BD5T, not BD5.
3. One DALI system is recommended only one PST.

INSTALLATION DRAWING

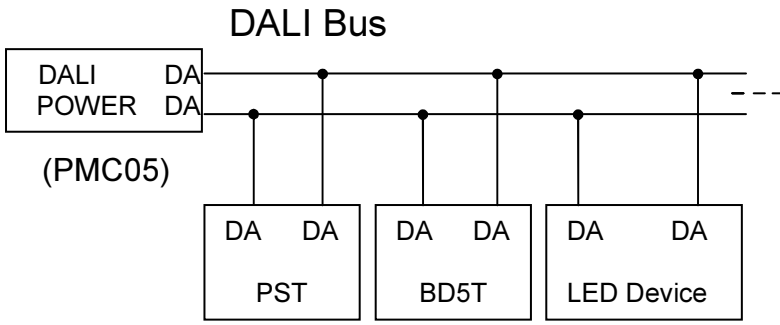

PST is set via BD5T and iDALI App.

MECHANIC DRAWING

