

**Reverse Voltage 35 to 100V Forward Current 15A**

### Feature & Dimensions

- \* Plastic package has underwriters laboratory Flammability classification 94V-0
- \* Low power loss,high efficiency
- \* For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- \* Guarding for over voltage protection
- \* High temperature soldering guaranteed: 260°C/10 seconds at terminals

### Mechanical Data

Case : JEDEC R-6, molded plastic over sky die


Terminals : Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity : Color band denotes cathode end

Weight : 0.042oz., 1.19 g

Mounting position : Any

Handling precaution : None

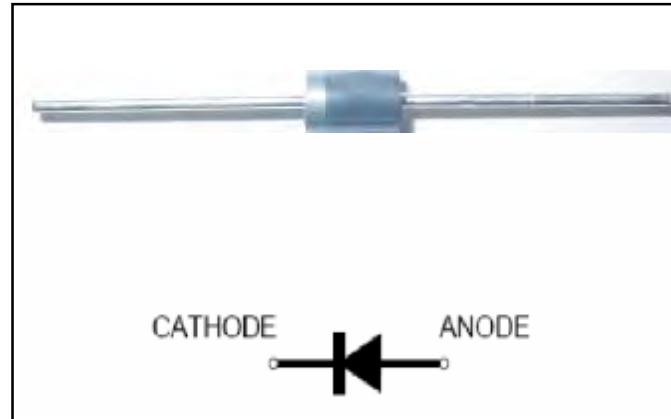

We declare that the material of product compliance with ROHS requirements

### 1. Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter symbol	Symbol	SB1535	SB1545	SB1550	SB1560	SB1580	SB15100	Unit
Device marking code		SB1535	SB1545	SB1550	SB1560	SB1580	SB15100	
Maximum repetitive peak reverse voltage	$V_{RRM}$	35	45	50	60	80	100	V
Maximum RMS voltage	$V_{RMS}$	35	45	50	60	80	100	V
Maximum DC blocking voltage	$V_{DC}$	35	45	50	60	80	100	V
Maximum average forward rectified current 0.375" (9.5mm) lead length (See fig. 1)	IF(AV)	15.0						A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM1}$	200						A
Thermal resistance, junction to ambient	$R_{\theta JA}$	40						°C/W
Operating junction and storage temperature range	TJ, TSTG	-40 to +150						°C

### Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter symbol	Symbol	SB1535	SB1545	SB1550	SB1560	SB1580	SB15100	Unit
Maximum instantaneous forward voltage at 15.0A	VF	0.55	0.60	0.70	0.90			V
Maximum DC reverse current TC = 25°C	$I_r$	200						uA
Maximum DC reverse current TC = 100°C	$I_r$	1000						uA
Typical junction capacitance at 4.0V, 1MHz	CJ	500		380		PF		

Notes:

1. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

## 2. Characteristic Curves ( TA = 25°C unless otherwise noted )

Fig. 1 - Forward Current Derating Curve

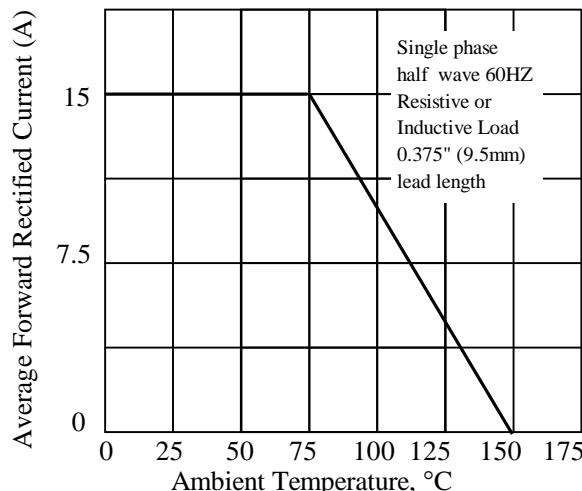


Fig. 3. - Typical Instantaneous Forward Characteristics

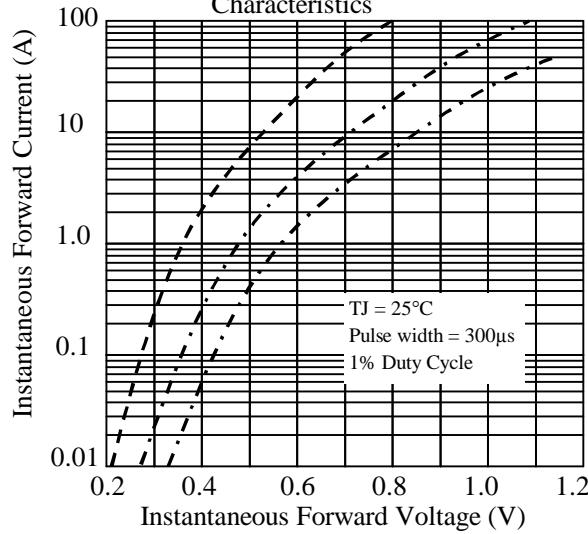


Fig 5. - typical transient thermal impedance

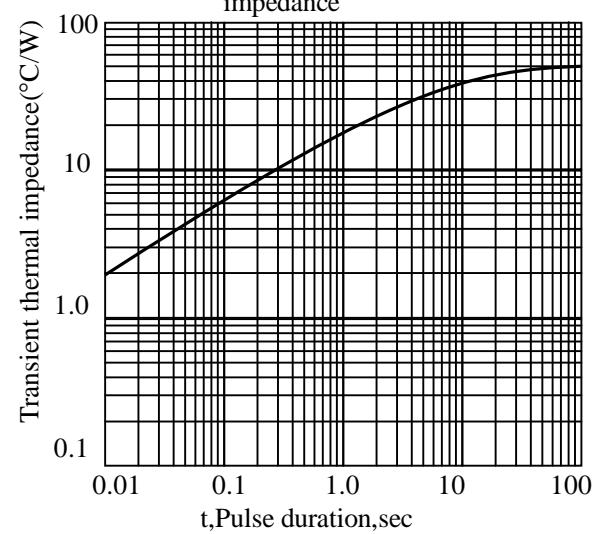


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

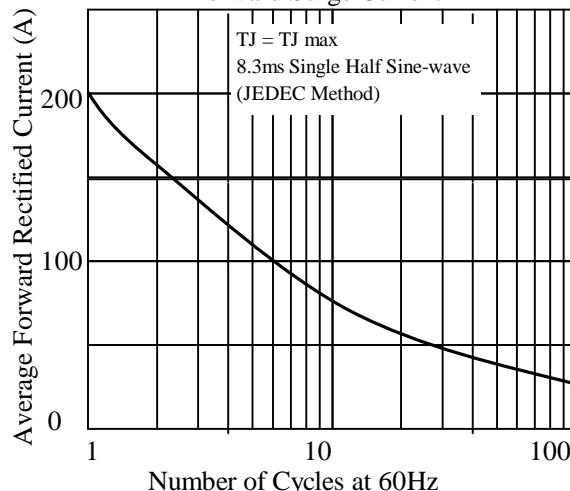


Fig 4. - Typical Reverse Characteristics



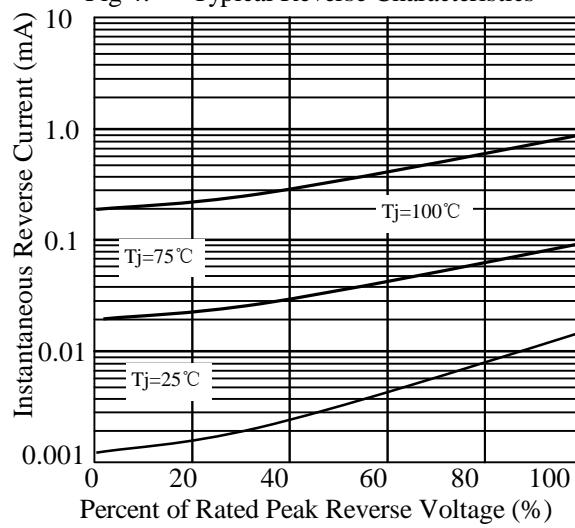


Fig 6. - Typical Junction Capacitance

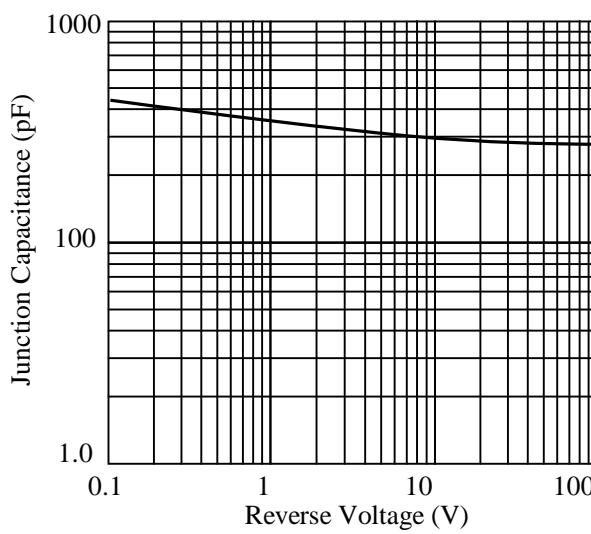

### 3. dimension:

Package outline

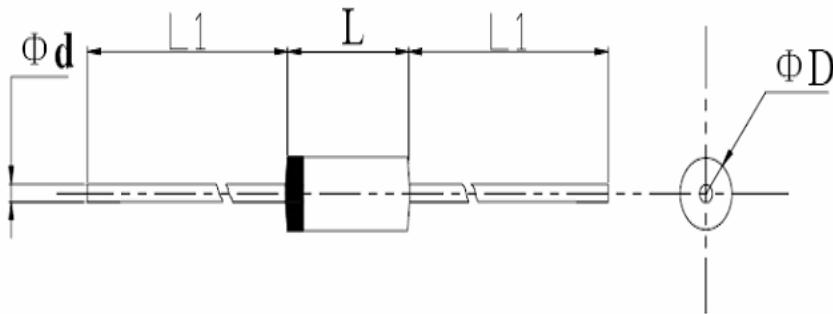

Dimensions				Note: R-6 molded plastic case The marking band indicates the cathode
	inches		mm	
	Min.	Max.	Min.	Max.
L	0.335	0.375	8.5	9.5
L1	1.0	-	25.4	-
$\Phi D$	0.335	0.375	8.5	9.5
$\Phi d$	0.048	0.052	1.2	1.3