

### NPN EPITAXIAL SILICON TRANSISTOR 4-PIN MINI MOLD


#### FEATURE

- Ideal for medium-output applications
- High gain, low noise
- Small reverse transfer capacitance
- Can operate at low voltage

#### ABSOLUTE MAXIMUM RATINGS ( $T_A = 25\text{ }^\circ\text{C}$ )

| PARAMETER                    | SYMBOL    | RATING      | UNIT             |
|------------------------------|-----------|-------------|------------------|
| Collector to Base Voltage    | $V_{CBO}$ | 9           | V                |
| Collector to Emitter Voltage | $V_{CEO}$ | 6           | V                |
| Emitter to Base Voltage      | $V_{EBO}$ | 2           | V                |
| Collector Current            | $I_C$     | 100         | mA               |
| Total Power Dissipation      | $P_T$     | 200         | mW               |
| Junction Temperature         | $T_j$     | 150         | $^\circ\text{C}$ |
| Storage Temperature          | $T_{stg}$ | -65 to +150 | $^\circ\text{C}$ |

#### PACKAGE DIMENSIONS (in mm)

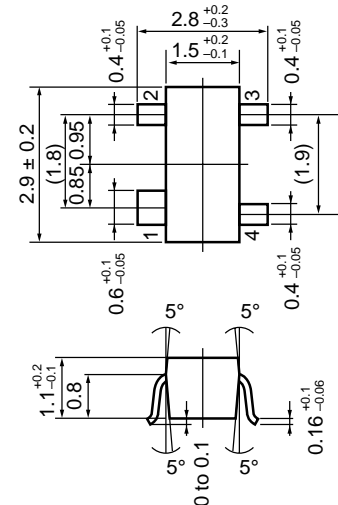

#### PIN CONNECTIONS

- 1: Collector
- 2: Emitter
- 3: Base
- 4: Emitter

#### ELECTRICAL CHARACTERISTICS ( $T_A = 25\text{ }^\circ\text{C}$ )

| PARAMETER                    | SYMBOL        | TEST CONDITIONS  | MIN. | TYP. | MAX. | UNIT          |
|------------------------------|---------------|--|------|------|------|---------------|
| Collector Cut-off Current    | $I_{CBO}$     | $V_{CB} = 5\text{ V}, I_E = 0$                                     |      |      | 0.1  | $\mu\text{A}$ |
| Emitter Cut-off Current      | $I_{EBO}$     | $V_{EB} = 1\text{ V}, I_C = 0$                                     |      |      | 0.1  | $\mu\text{A}$ |
| DC Current Gain              | $h_{FE}$      | $V_{CE} = 3\text{ V}, I_C = 30\text{ mA}$ <sup>Note 1</sup>        | 75   |      | 150  |               |
| Gain Bandwidth Product       | $f_T$         | $V_{CE} = 3\text{ V}, I_C = 30\text{ mA}, f = 2\text{ GHz}$        |      | 12.0 |      | GHz           |
| Reverse Transfer Capacitance | $C_{re}$      | $V_{CB} = 3\text{ V}, I_E = 0, f = 1\text{ MHz}$ <sup>Note 2</sup> |      | 0.5  | 0.7  | pF            |
| Insertion Power Gain         | $ S_{21e} ^2$ | $V_{CE} = 3\text{ V}, I_C = 30\text{ mA}, f = 2\text{ GHz}$        | 8.0  | 10.0 |      | dB            |
| Noise Figure                 | NF            | $V_{CE} = 3\text{ V}, I_C = 7\text{ mA}, f = 2\text{ GHz}$         |      | 1.5  | 2.5  | dB            |

**Notes** 1. Pulse measurement  $P_w \leq 350\text{ }\mu\text{s}$ , duty cycle  $\leq 2\%$

2. Collector to base capacitance measured by capacitance meter (automatic balance bridge method) when emitter pin is connected to the guard pin.





**Because this product uses high-frequency process, avoid excessive input of static electricity, etc.**

The information in this document is subject to change without notice.


**h<sub>FE</sub> CLASSIFICATION**

|                 |           |
|-----------------|-----------|
| RANK            | FB        |
| Marking         | R55       |
| h <sub>FE</sub> | 75 to 150 |


**TYPICAL CHARACTERISTICS (T<sub>A</sub> = 25 °C)**

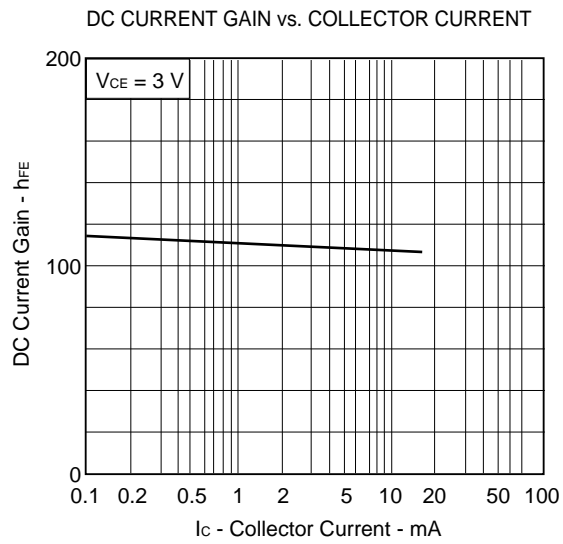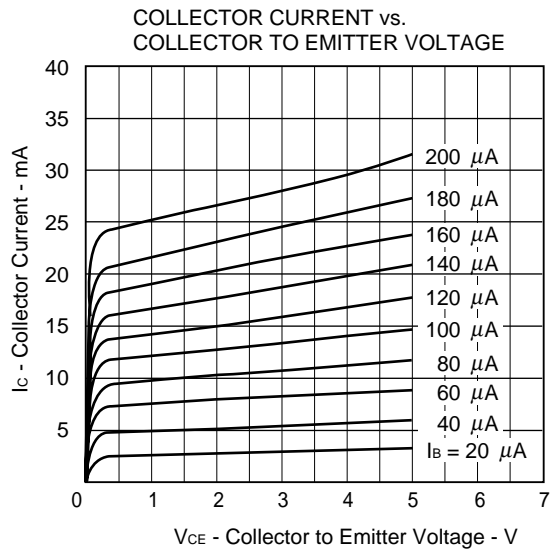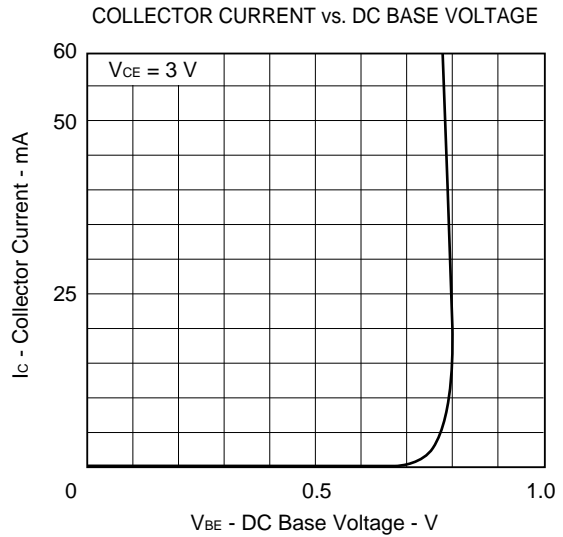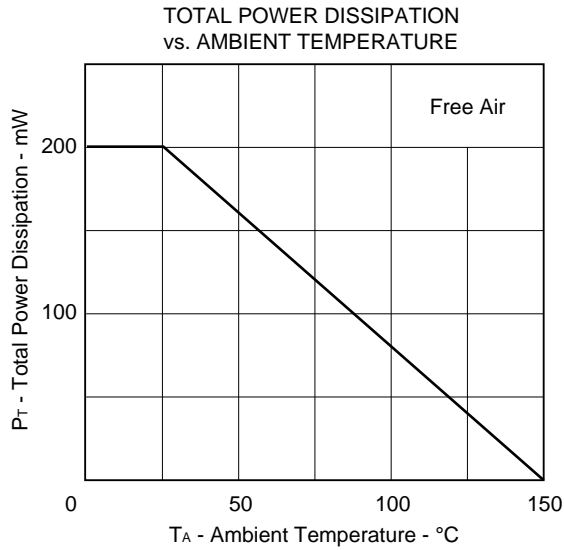


GAIN BANDWIDTH PRODUCT vs. COLLECTOR CURRENT

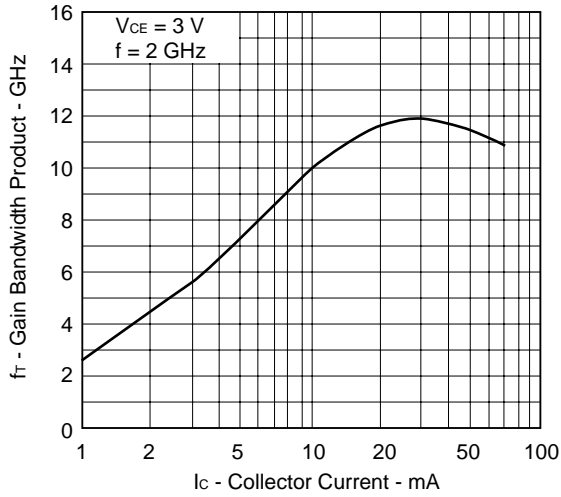


INSERTION POWER GAIN vs. COLLECTOR CURRENT

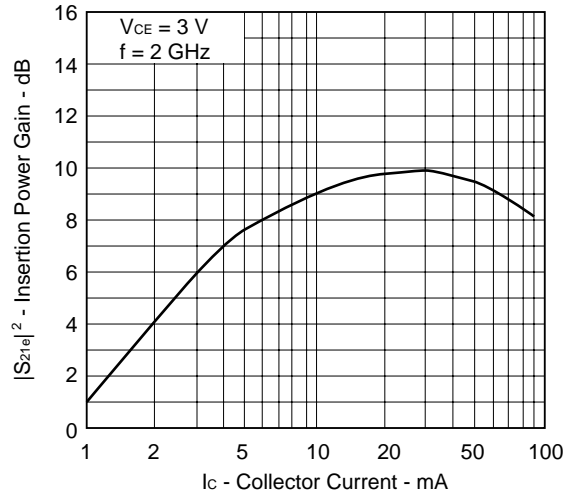


GAIN WITH MINIMUM NF/NOISE FIGURE vs. COLLECTOR CURRENT

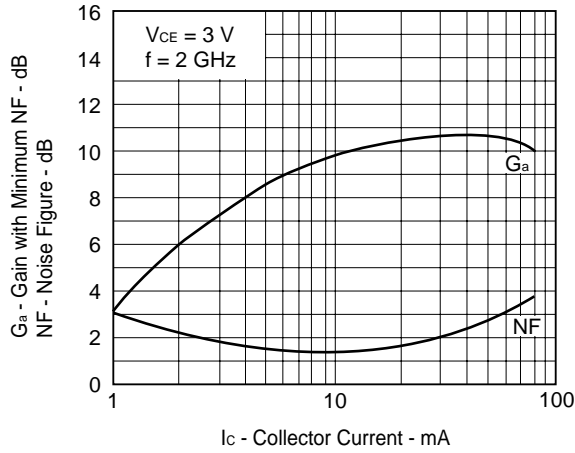


REVERSE TRANSFER CAPACITANCE vs. COLLECTOR TO BASE VOLTAGE

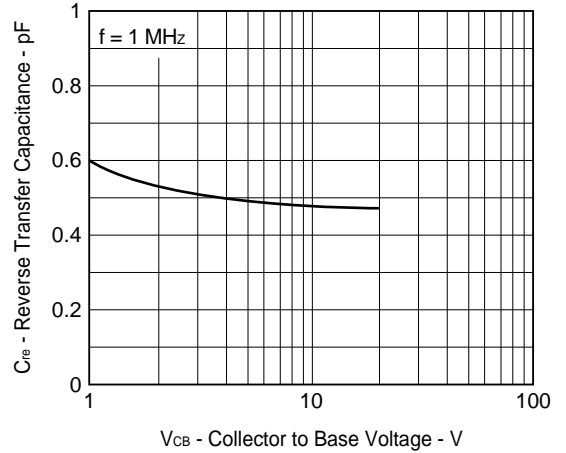


MAXIMUM AVAILABLE GAIN/  
MAXIMUM STABLE GAIN/INSERTION  
POWER GAIN vs. FREQUENCY

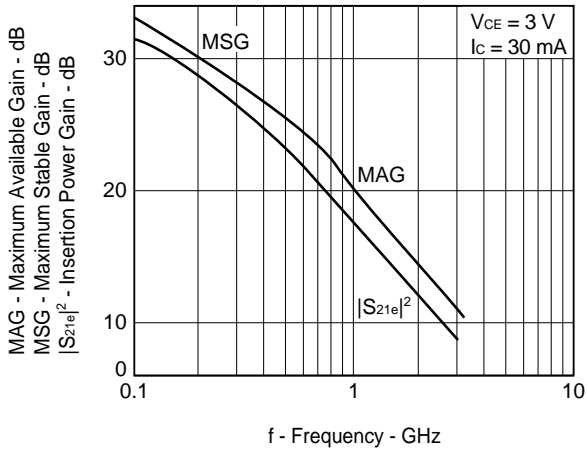

OUTPUT POWER vs. INPUT POWER

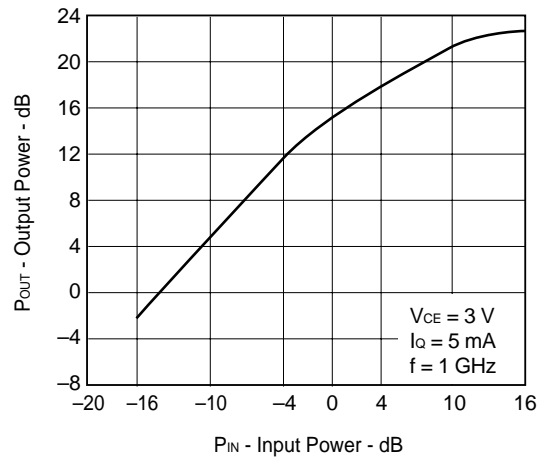

OUTPUT POWER vs. INPUT POWER

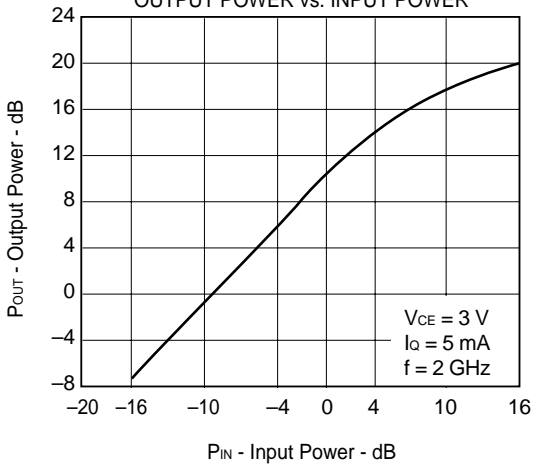

2SC5455 S PARAMETER

V<sub>CE</sub> = 3.0 V, I<sub>c</sub> = 5.0 mA, Z<sub>0</sub> = 50 Ω

| FREQUENCY |       | S <sub>11</sub> |        | S <sub>21</sub> |       | S <sub>12</sub> |       | S <sub>22</sub> |  |
|-----------|-------|-----------------|--------|-----------------|-------|-----------------|-------|-----------------|--|
| MHz       | MAG   | ANG             | MAG    | ANG             | MAG   | ANG             | MAG   | ANG             |  |
| 100.00    | 0.849 | -29.2           | 14.200 | 159.5           | 0.026 | 74.3            | 0.948 | -16.9           |  |
| 200.00    | 0.792 | -55.4           | 12.643 | 142.7           | 0.046 | 60.0            | 0.849 | -32.0           |  |
| 300.00    | 0.732 | -78.7           | 11.179 | 128.9           | 0.060 | 49.1            | 0.742 | -43.3           |  |
| 400.00    | 0.688 | -97.0           | 9.470  | 118.4           | 0.069 | 41.5            | 0.644 | -52.7           |  |
| 500.00    | 0.640 | -113.2          | 8.319  | 107.7           | 0.074 | 36.6            | 0.569 | -58.6           |  |
| 600.00    | 0.613 | -127.0          | 7.339  | 100.0           | 0.078 | 32.3            | 0.511 | -64.0           |  |
| 700.00    | 0.594 | -137.9          | 6.450  | 93.3            | 0.080 | 30.4            | 0.462 | -69.0           |  |
| 800.00    | 0.581 | -147.8          | 5.764  | 87.3            | 0.082 | 28.7            | 0.427 | -73.1           |  |
| 900.00    | 0.574 | -156.2          | 5.176  | 82.2            | 0.083 | 26.9            | 0.395 | -77.0           |  |
| 1000.00   | 0.570 | -163.6          | 4.717  | 77.3            | 0.084 | 26.3            | 0.374 | -80.9           |  |
| 1100.00   | 0.569 | -170.1          | 4.318  | 72.9            | 0.085 | 25.4            | 0.358 | -84.8           |  |
| 1200.00   | 0.570 | -176.2          | 3.974  | 68.7            | 0.086 | 25.9            | 0.343 | -88.1           |  |
| 1300.00   | 0.574 | 178.4           | 3.673  | 64.7            | 0.086 | 26.2            | 0.334 | -92.4           |  |
| 1400.00   | 0.577 | 173.4           | 3.429  | 60.7            | 0.087 | 26.3            | 0.326 | -96.2           |  |
| 1500.00   | 0.583 | 168.7           | 3.202  | 57.1            | 0.089 | 26.8            | 0.322 | -100.4          |  |
| 1600.00   | 0.589 | 164.5           | 2.984  | 53.5            | 0.090 | 27.3            | 0.321 | -103.9          |  |
| 1700.00   | 0.596 | 160.5           | 2.831  | 49.9            | 0.091 | 28.1            | 0.316 | -108.7          |  |
| 1800.00   | 0.603 | 156.8           | 2.669  | 46.5            | 0.093 | 29.2            | 0.319 | -111.9          |  |
| 1900.00   | 0.610 | 153.0           | 2.523  | 42.7            | 0.095 | 29.7            | 0.319 | -117.2          |  |
| 2000.00   | 0.617 | 149.9           | 2.396  | 39.6            | 0.097 | 30.6            | 0.323 | -119.9          |  |
| 2100.00   | 0.624 | 146.4           | 2.268  | 36.1            | 0.099 | 31.2            | 0.328 | -125.4          |  |
| 2200.00   | 0.632 | 143.5           | 2.162  | 32.9            | 0.102 | 31.6            | 0.333 | -127.0          |  |
| 2300.00   | 0.637 | 140.5           | 2.044  | 29.9            | 0.104 | 32.7            | 0.341 | -133.3          |  |
| 2400.00   | 0.645 | 137.6           | 1.952  | 26.7            | 0.108 | 33.4            | 0.346 | -133.8          |  |
| 2500.00   | 0.646 | 135.1           | 1.870  | 24.4            | 0.111 | 34.1            | 0.357 | -139.6          |  |
| 2600.00   | 0.654 | 132.4           | 1.773  | 21.2            | 0.115 | 34.6            | 0.369 | -140.4          |  |
| 2700.00   | 0.660 | 130.3           | 1.712  | 18.2            | 0.120 | 35.2            | 0.384 | -145.9          |  |
| 2800.00   | 0.666 | 127.7           | 1.632  | 15.9            | 0.124 | 34.7            | 0.393 | -148.1          |  |
| 2900.00   | 0.673 | 125.7           | 1.561  | 12.6            | 0.129 | 34.5            | 0.412 | -152.4          |  |
| 3000.00   | 0.676 | 123.3           | 1.494  | 10.7            | 0.133 | 34.3            | 0.418 | -155.2          |  |

V<sub>CE</sub> = 3.0 V, I<sub>c</sub> = 10.0 mA, Z<sub>0</sub> = 50 Ω

| FREQUENCY |       | S <sub>11</sub> |        | S <sub>21</sub> |       | S <sub>12</sub> |       | S <sub>22</sub> |  |
|-----------|-------|-----------------|--------|-----------------|-------|-----------------|-------|-----------------|--|
| MHz       | MAG   | ANG             | MAG    | ANG             | MAG   | ANG             | MAG   | ANG             |  |
| 100.00    | 0.741 | -41.6           | 23.253 | 153.2           | 0.023 | 69.0            | 0.898 | -25.2           |  |
| 200.00    | 0.668 | -75.4           | 19.107 | 132.8           | 0.039 | 55.1            | 0.737 | -44.8           |  |
| 300.00    | 0.612 | -101.6          | 15.604 | 118.6           | 0.048 | 46.1            | 0.597 | -58.1           |  |
| 400.00    | 0.576 | -120.4          | 12.659 | 108.8           | 0.053 | 41.7            | 0.496 | -68.0           |  |
| 500.00    | 0.553 | -135.2          | 10.612 | 99.9            | 0.057 | 39.5            | 0.423 | -74.5           |  |
| 600.00    | 0.541 | -147.0          | 9.108  | 93.3            | 0.060 | 38.6            | 0.375 | -80.4           |  |
| 700.00    | 0.535 | -156.6          | 7.906  | 87.8            | 0.063 | 38.2            | 0.332 | -86.3           |  |
| 800.00    | 0.532 | -164.6          | 6.994  | 82.9            | 0.066 | 38.1            | 0.307 | -90.7           |  |
| 900.00    | 0.531 | -171.5          | 6.238  | 78.4            | 0.069 | 38.4            | 0.285 | -95.6           |  |
| 1000.00   | 0.533 | -177.6          | 5.639  | 74.3            | 0.072 | 38.8            | 0.269 | -100.2          |  |
| 1100.00   | 0.536 | 177.0           | 5.148  | 70.6            | 0.075 | 38.8            | 0.257 | -105.1          |  |
| 1200.00   | 0.540 | 171.9           | 4.726  | 66.9            | 0.079 | 39.4            | 0.249 | -109.3          |  |
| 1300.00   | 0.546 | 167.6           | 4.367  | 63.6            | 0.082 | 39.9            | 0.244 | -114.2          |  |
| 1400.00   | 0.551 | 163.4           | 4.060  | 59.9            | 0.085 | 40.0            | 0.241 | -118.1          |  |
| 1500.00   | 0.558 | 159.6           | 3.788  | 56.9            | 0.089 | 39.9            | 0.240 | -123.1          |  |
| 1600.00   | 0.565 | 156.0           | 3.543  | 53.5            | 0.092 | 39.9            | 0.243 | -126.5          |  |
| 1700.00   | 0.572 | 152.6           | 3.333  | 50.3            | 0.096 | 40.1            | 0.244 | -131.6          |  |
| 1800.00   | 0.579 | 149.5           | 3.146  | 47.4            | 0.100 | 40.1            | 0.248 | -134.7          |  |
| 1900.00   | 0.587 | 146.3           | 2.975  | 44.0            | 0.103 | 39.8            | 0.251 | -140.5          |  |
| 2000.00   | 0.592 | 143.8           | 2.819  | 41.1            | 0.107 | 40.0            | 0.255 | -142.2          |  |
| 2100.00   | 0.603 | 140.6           | 2.680  | 38.1            | 0.111 | 39.6            | 0.266 | -148.0          |  |
| 2200.00   | 0.611 | 138.1           | 2.548  | 35.1            | 0.115 | 39.1            | 0.268 | -148.5          |  |
| 2300.00   | 0.614 | 135.5           | 2.409  | 32.4            | 0.118 | 39.0            | 0.281 | -154.5          |  |
| 2400.00   | 0.624 | 133.0           | 2.300  | 29.6            | 0.122 | 38.7            | 0.283 | -154.0          |  |
| 2500.00   | 0.625 | 130.7           | 2.203  | 27.4            | 0.126 | 38.7            | 0.299 | -159.2          |  |
| 2600.00   | 0.635 | 128.3           | 2.097  | 24.8            | 0.131 | 38.1            | 0.306 | -159.4          |  |
| 2700.00   | 0.639 | 126.5           | 2.028  | 21.8            | 0.136 | 37.6            | 0.326 | -164.0          |  |
| 2800.00   | 0.647 | 124.1           | 1.934  | 19.7            | 0.140 | 36.8            | 0.332 | -165.3          |  |
| 2900.00   | 0.655 | 122.2           | 1.856  | 16.9            | 0.146 | 35.8            | 0.350 | -168.9          |  |
| 3000.00   | 0.658 | 120.0           | 1.783  | 15.0            | 0.149 | 35.3            | 0.356 | -171.0          |  |

2SC5455 S PARAMETER

V<sub>CE</sub> = 3.0 V, I<sub>c</sub> = 20.0 mA, Z<sub>0</sub> = 50 Ω

| FREQUENCY<br>MHz | S <sub>11</sub> |        | S <sub>21</sub> |       | S <sub>12</sub> |      | S <sub>22</sub> |        |
|------------------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|--------|
|                  | MAG             | ANG    | MAG             | ANG   | MAG             | ANG  | MAG             | ANG    |
| 100.00           | 0.608           | -59.0  | 33.348          | 145.2 | 0.020           | 65.2 | 0.820           | -35.6  |
| 200.00           | 0.556           | -99.3  | 24.680          | 123.3 | 0.031           | 52.4 | 0.613           | -58.4  |
| 300.00           | 0.527           | -124.7 | 18.769          | 110.1 | 0.038           | 48.1 | 0.470           | -73.0  |
| 400.00           | 0.505           | -142.0 | 14.726          | 101.4 | 0.042           | 46.0 | 0.382           | -83.6  |
| 500.00           | 0.510           | -153.8 | 12.083          | 94.2  | 0.047           | 46.7 | 0.322           | -91.6  |
| 600.00           | 0.508           | -163.0 | 10.226          | 88.7  | 0.051           | 47.5 | 0.287           | -98.7  |
| 700.00           | 0.509           | -170.7 | 8.816           | 83.9  | 0.055           | 48.0 | 0.256           | -105.3 |
| 800.00           | 0.512           | -177.0 | 7.760           | 79.8  | 0.059           | 48.4 | 0.241           | -111.0 |
| 900.00           | 0.516           | -177.7 | 6.889           | 76.2  | 0.064           | 49.2 | 0.227           | -116.8 |
| 1000.00          | 0.521           | -172.7 | 6.214           | 72.4  | 0.068           | 49.1 | 0.218           | -121.8 |
| 1100.00          | 0.525           | -168.4 | 5.654           | 68.9  | 0.073           | 49.0 | 0.216           | -127.6 |
| 1200.00          | 0.531           | -164.1 | 5.188           | 65.9  | 0.077           | 49.4 | 0.211           | -131.7 |
| 1300.00          | 0.538           | -160.4 | 4.795           | 62.7  | 0.083           | 48.9 | 0.214           | -136.8 |
| 1400.00          | 0.544           | -156.8 | 4.447           | 59.7  | 0.087           | 49.0 | 0.215           | -140.8 |
| 1500.00          | 0.551           | -153.4 | 4.162           | 56.7  | 0.091           | 48.2 | 0.220           | -146.1 |
| 1600.00          | 0.557           | -150.3 | 3.883           | 53.7  | 0.096           | 47.7 | 0.224           | -148.7 |
| 1700.00          | 0.566           | -147.4 | 3.660           | 50.7  | 0.101           | 47.1 | 0.233           | -153.2 |
| 1800.00          | 0.571           | -144.6 | 3.453           | 47.8  | 0.106           | 46.5 | 0.236           | -156.3 |
| 1900.00          | 0.580           | -141.8 | 3.253           | 44.8  | 0.110           | 45.5 | 0.245           | -161.2 |
| 2000.00          | 0.586           | -139.6 | 3.086           | 42.1  | 0.115           | 45.0 | 0.247           | -162.1 |
| 2100.00          | 0.594           | -136.7 | 2.917           | 39.2  | 0.119           | 44.3 | 0.261           | -166.9 |
| 2200.00          | 0.602           | -134.6 | 2.784           | 36.5  | 0.124           | 43.3 | 0.260           | -167.6 |
| 2300.00          | 0.607           | -132.0 | 2.638           | 34.1  | 0.128           | 42.6 | 0.279           | -172.6 |
| 2400.00          | 0.617           | -129.8 | 2.509           | 31.5  | 0.132           | 41.5 | 0.274           | -172.3 |
| 2500.00          | 0.617           | -127.7 | 2.409           | 29.4  | 0.136           | 41.2 | 0.296           | -175.9 |
| 2600.00          | 0.628           | -125.5 | 2.287           | 27.0  | 0.142           | 40.3 | 0.298           | -175.6 |
| 2700.00          | 0.633           | -123.9 | 2.216           | 24.3  | 0.147           | 39.3 | 0.318           | -179.5 |
| 2800.00          | 0.641           | -121.5 | 2.119           | 22.4  | 0.151           | 38.2 | 0.323           | -179.6 |
| 2900.00          | 0.647           | -119.9 | 2.033           | 19.8  | 0.156           | 36.9 | 0.341           | -177.1 |
| 3000.00          | 0.651           | -117.7 | 1.959           | 18.0  | 0.160           | 36.0 | 0.347           | -175.1 |

V<sub>CE</sub> = 3.0 V, I<sub>c</sub> = 30.0 mA, Z<sub>0</sub> = 50 Ω

| FREQUENCY<br>MHz | S <sub>11</sub> |        | S <sub>21</sub> |       | S <sub>12</sub> |      | S <sub>22</sub> |        |
|------------------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|--------|
|                  | MAG             | ANG    | MAG             | ANG   | MAG             | ANG  | MAG             | ANG    |
| 100.00           | 0.540           | -70.7  | 38.305          | 140.7 | 0.019           | 63.3 | 0.773           | -41.2  |
| 200.00           | 0.512           | -112.4 | 26.801          | 118.8 | 0.028           | 51.9 | 0.547           | -65.8  |
| 300.00           | 0.500           | -136.0 | 19.773          | 106.5 | 0.033           | 49.4 | 0.415           | -80.8  |
| 400.00           | 0.503           | -150.9 | 15.344          | 98.5  | 0.037           | 51.0 | 0.337           | -92.0  |
| 500.00           | 0.500           | -161.7 | 12.506          | 91.8  | 0.043           | 51.3 | 0.285           | -100.3 |
| 600.00           | 0.502           | -169.8 | 10.529          | 86.8  | 0.048           | 52.1 | 0.256           | -107.8 |
| 700.00           | 0.508           | -176.6 | 9.061           | 82.3  | 0.053           | 52.6 | 0.234           | -114.9 |
| 800.00           | 0.511           | -177.8 | 7.950           | 78.4  | 0.057           | 52.8 | 0.222           | -120.7 |
| 900.00           | 0.516           | -172.6 | 7.064           | 74.9  | 0.062           | 53.0 | 0.213           | -126.9 |
| 1000.00          | 0.521           | -168.2 | 6.367           | 71.5  | 0.068           | 53.6 | 0.208           | -132.0 |
| 1100.00          | 0.526           | -164.3 | 5.804           | 68.3  | 0.073           | 53.1 | 0.207           | -137.8 |
| 1200.00          | 0.533           | -160.3 | 5.306           | 65.2  | 0.078           | 53.2 | 0.207           | -142.0 |
| 1300.00          | 0.539           | -156.9 | 4.899           | 62.2  | 0.083           | 52.2 | 0.211           | -146.3 |
| 1400.00          | 0.545           | -153.5 | 4.553           | 59.2  | 0.088           | 51.8 | 0.213           | -150.9 |
| 1500.00          | 0.553           | -150.6 | 4.263           | 56.4  | 0.093           | 51.2 | 0.221           | -154.8 |
| 1600.00          | 0.559           | -147.5 | 3.967           | 53.5  | 0.098           | 50.8 | 0.226           | -157.3 |
| 1700.00          | 0.567           | -144.8 | 3.744           | 50.4  | 0.104           | 49.5 | 0.233           | -162.3 |
| 1800.00          | 0.572           | -142.2 | 3.528           | 47.8  | 0.108           | 48.2 | 0.241           | -164.1 |
| 1900.00          | 0.582           | -139.6 | 3.334           | 44.8  | 0.113           | 47.4 | 0.251           | -168.2 |
| 2000.00          | 0.587           | -137.4 | 3.161           | 42.3  | 0.118           | 46.6 | 0.251           | -169.9 |
| 2100.00          | 0.594           | -134.7 | 2.992           | 39.4  | 0.123           | 45.5 | 0.268           | -174.0 |
| 2200.00          | 0.603           | -132.7 | 2.847           | 36.8  | 0.128           | 44.4 | 0.265           | -175.0 |
| 2300.00          | 0.607           | -130.3 | 2.695           | 34.4  | 0.132           | 43.5 | 0.285           | -179.0 |
| 2400.00          | 0.618           | -128.1 | 2.564           | 31.8  | 0.136           | 42.9 | 0.280           | -178.5 |
| 2500.00          | 0.617           | -126.1 | 2.459           | 29.9  | 0.140           | 42.0 | 0.302           | -177.6 |
| 2600.00          | 0.628           | -123.9 | 2.339           | 27.6  | 0.146           | 40.9 | 0.302           | -177.7 |
| 2700.00          | 0.633           | -122.5 | 2.263           | 24.8  | 0.150           | 40.0 | 0.326           | -174.6 |
| 2800.00          | 0.641           | -120.0 | 2.165           | 23.1  | 0.155           | 38.9 | 0.328           | -173.7 |
| 2900.00          | 0.648           | -118.6 | 2.077           | 20.5  | 0.160           | 37.4 | 0.346           | -171.5 |
| 3000.00          | 0.652           | -116.4 | 2.003           | 18.9  | 0.164           | 36.1 | 0.352           | -169.7 |

2SC5455 S PARAMETER

V<sub>CE</sub> = 5.0 V, I<sub>c</sub> = 5.0 mA, Z<sub>0</sub> = 50 Ω

| FREQUENCY<br>MHz | S <sub>11</sub> |        | S <sub>21</sub> |       | S <sub>12</sub> |      | S <sub>22</sub> |        |
|------------------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|--------|
|                  | MAG             | ANG    | MAG             | ANG   | MAG             | ANG  | MAG             | ANG    |
| 100.00           | 0.858           | -28.0  | 14.245          | 160.5 | 0.025           | 74.0 | 0.949           | -16.1  |
| 200.00           | 0.800           | -53.2  | 12.754          | 143.3 | 0.044           | 60.6 | 0.856           | -30.3  |
| 300.00           | 0.739           | -75.8  | 11.353          | 130.1 | 0.057           | 50.2 | 0.753           | -41.4  |
| 400.00           | 0.691           | -93.6  | 9.639           | 119.6 | 0.066           | 42.7 | 0.657           | -50.2  |
| 500.00           | 0.642           | -110.2 | 8.532           | 108.8 | 0.072           | 37.7 | 0.582           | -56.0  |
| 600.00           | 0.611           | -123.8 | 7.532           | 101.1 | 0.075           | 34.1 | 0.525           | -61.3  |
| 700.00           | 0.590           | -135.1 | 6.650           | 94.3  | 0.077           | 31.4 | 0.475           | -66.2  |
| 800.00           | 0.575           | -145.2 | 5.962           | 88.4  | 0.079           | 29.3 | 0.444           | -69.7  |
| 900.00           | 0.567           | -153.7 | 5.351           | 83.1  | 0.080           | 28.0 | 0.410           | -73.9  |
| 1000.00          | 0.562           | -161.3 | 4.876           | 78.0  | 0.081           | 27.5 | 0.388           | -77.1  |
| 1100.00          | 0.561           | -168.0 | 4.466           | 73.7  | 0.082           | 27.0 | 0.370           | -81.0  |
| 1200.00          | 0.560           | -174.2 | 4.115           | 69.4  | 0.083           | 26.6 | 0.356           | -84.3  |
| 1300.00          | 0.565           | -179.7 | 3.806           | 65.4  | 0.085           | 27.1 | 0.346           | -88.2  |
| 1400.00          | 0.567           | 175.1  | 3.546           | 61.5  | 0.085           | 27.4 | 0.337           | -91.9  |
| 1500.00          | 0.572           | 170.3  | 3.330           | 58.0  | 0.086           | 27.9 | 0.331           | -96.0  |
| 1600.00          | 0.578           | 166.0  | 3.106           | 54.2  | 0.088           | 28.5 | 0.329           | -99.5  |
| 1700.00          | 0.585           | 161.9  | 2.946           | 50.2  | 0.089           | 29.5 | 0.326           | -104.1 |
| 1800.00          | 0.592           | 158.1  | 2.766           | 47.3  | 0.090           | 30.2 | 0.329           | -107.4 |
| 1900.00          | 0.600           | 154.3  | 2.623           | 43.5  | 0.093           | 30.7 | 0.326           | -112.9 |
| 2000.00          | 0.607           | 151.1  | 2.484           | 40.2  | 0.095           | 31.9 | 0.329           | -115.1 |
| 2100.00          | 0.614           | 147.5  | 2.357           | 36.8  | 0.097           | 32.8 | 0.334           | -121.1 |
| 2200.00          | 0.622           | 144.5  | 2.249           | 33.6  | 0.100           | 33.4 | 0.340           | -122.7 |
| 2300.00          | 0.626           | 141.5  | 2.125           | 30.5  | 0.102           | 34.0 | 0.342           | -128.6 |
| 2400.00          | 0.635           | 138.5  | 2.028           | 27.3  | 0.106           | 34.7 | 0.351           | -129.8 |
| 2500.00          | 0.637           | 135.9  | 1.940           | 24.8  | 0.109           | 35.9 | 0.360           | -135.2 |
| 2600.00          | 0.645           | 133.2  | 1.842           | 21.8  | 0.113           | 36.3 | 0.372           | -136.4 |
| 2700.00          | 0.651           | 131.1  | 1.782           | 18.7  | 0.118           | 36.7 | 0.387           | -142.2 |
| 2800.00          | 0.657           | 128.4  | 1.696           | 16.2  | 0.121           | 36.3 | 0.396           | -144.2 |
| 2900.00          | 0.664           | 126.4  | 1.625           | 13.2  | 0.127           | 36.3 | 0.415           | -148.4 |
| 3000.00          | 0.668           | 124.0  | 1.557           | 11.1  | 0.131           | 36.0 | 0.419           | -151.6 |

V<sub>CE</sub> = 5.0 V, I<sub>c</sub> = 10.0 mA, Z<sub>0</sub> = 50 Ω

| FREQUENCY<br>MHz | S <sub>11</sub> |        | S <sub>21</sub> |       | S <sub>12</sub> |      | S <sub>22</sub> |        |
|------------------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|--------|
|                  | MAG             | ANG    | MAG             | ANG   | MAG             | ANG  | MAG             | ANG    |
| 100.00           | 0.756           | -39.2  | 23.248          | 154.1 | 0.022           | 70.0 | 0.899           | -23.7  |
| 200.00           | 0.680           | -71.6  | 19.314          | 134.2 | 0.038           | 56.1 | 0.751           | -42.3  |
| 300.00           | 0.616           | -97.0  | 15.939          | 120.0 | 0.046           | 47.1 | 0.615           | -55.1  |
| 400.00           | 0.578           | -116.3 | 12.974          | 110.2 | 0.052           | 42.9 | 0.515           | -64.5  |
| 500.00           | 0.548           | -131.4 | 10.940          | 101.0 | 0.056           | 40.6 | 0.440           | -70.8  |
| 600.00           | 0.532           | -143.4 | 9.424           | 94.4  | 0.059           | 39.4 | 0.388           | -76.2  |
| 700.00           | 0.532           | -153.4 | 8.187           | 88.8  | 0.062           | 38.7 | 0.344           | -81.1  |
| 800.00           | 0.520           | -161.6 | 7.256           | 83.8  | 0.065           | 38.5 | 0.318           | -85.8  |
| 900.00           | 0.518           | -168.8 | 6.480           | 79.4  | 0.068           | 38.7 | 0.294           | -90.3  |
| 1000.00          | 0.520           | -175.2 | 5.861           | 75.2  | 0.071           | 39.1 | 0.277           | -94.3  |
| 1100.00          | 0.522           | 179.2  | 5.342           | 71.3  | 0.074           | 39.4 | 0.264           | -98.9  |
| 1200.00          | 0.525           | 174.0  | 4.906           | 67.7  | 0.077           | 39.9 | 0.255           | -102.7 |
| 1300.00          | 0.531           | 169.5  | 4.535           | 64.2  | 0.080           | 40.3 | 0.250           | -107.3 |
| 1400.00          | 0.536           | 165.1  | 4.213           | 60.8  | 0.084           | 40.8 | 0.244           | -111.7 |
| 1500.00          | 0.543           | 161.2  | 3.949           | 57.5  | 0.087           | 40.6 | 0.242           | -116.3 |
| 1600.00          | 0.550           | 157.5  | 3.685           | 54.4  | 0.091           | 40.7 | 0.243           | -120.2 |
| 1700.00          | 0.558           | 154.1  | 3.483           | 51.0  | 0.094           | 41.1 | 0.244           | -125.0 |
| 1800.00          | 0.564           | 150.9  | 3.289           | 47.9  | 0.097           | 40.9 | 0.247           | -128.5 |
| 1900.00          | 0.573           | 147.7  | 3.098           | 44.6  | 0.101           | 40.7 | 0.250           | -134.3 |
| 2000.00          | 0.578           | 145.0  | 2.942           | 41.9  | 0.104           | 40.5 | 0.254           | -136.1 |
| 2100.00          | 0.587           | 141.8  | 2.791           | 38.6  | 0.109           | 40.6 | 0.264           | -141.7 |
| 2200.00          | 0.596           | 139.4  | 2.646           | 35.8  | 0.112           | 40.0 | 0.265           | -142.7 |
| 2300.00          | 0.601           | 136.6  | 2.515           | 33.1  | 0.116           | 40.0 | 0.277           | -149.1 |
| 2400.00          | 0.611           | 134.0  | 2.396           | 30.1  | 0.120           | 39.6 | 0.279           | -148.5 |
| 2500.00          | 0.612           | 131.7  | 2.302           | 28.0  | 0.124           | 39.6 | 0.295           | -153.8 |
| 2600.00          | 0.622           | 129.2  | 2.189           | 25.2  | 0.128           | 39.3 | 0.299           | -154.0 |
| 2700.00          | 0.627           | 127.5  | 2.116           | 22.3  | 0.134           | 38.9 | 0.320           | -159.2 |
| 2800.00          | 0.635           | 125.0  | 2.020           | 20.2  | 0.138           | 37.7 | 0.328           | -160.8 |
| 2900.00          | 0.642           | 123.1  | 1.936           | 17.3  | 0.144           | 36.9 | 0.347           | -164.3 |
| 3000.00          | 0.647           | 120.9  | 1.861           | 15.5  | 0.148           | 36.4 | 0.352           | -166.7 |

2SC5455 S PARAMETER

V<sub>CE</sub> = 5.0 V, I<sub>c</sub> = 20.0 mA, Z<sub>0</sub> = 50 Ω

| FREQUENCY<br>MHz | S <sub>11</sub> |        | S <sub>21</sub> |       | S <sub>12</sub> |      | S <sub>22</sub> |        |
|------------------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|--------|
|                  | MAG             | ANG    | MAG             | ANG   | MAG             | ANG  | MAG             | ANG    |
| 100.00           | 0.635           | -54.4  | 33.512          | 146.5 | 0.020           | 66.2 | 0.830           | -33.2  |
| 200.00           | 0.566           | -93.3  | 25.234          | 124.9 | 0.031           | 53.6 | 0.630           | -55.1  |
| 300.00           | 0.526           | -118.9 | 19.353          | 111.5 | 0.037           | 48.0 | 0.485           | -69.0  |
| 400.00           | 0.505           | -136.8 | 15.238          | 102.7 | 0.042           | 47.5 | 0.395           | -79.0  |
| 500.00           | 0.498           | -149.4 | 12.561          | 95.2  | 0.046           | 47.1 | 0.332           | -86.2  |
| 600.00           | 0.493           | -159.3 | 10.646          | 89.6  | 0.050           | 47.4 | 0.294           | -92.5  |
| 700.00           | 0.492           | -167.5 | 9.192           | 84.9  | 0.054           | 48.0 | 0.263           | -98.6  |
| 800.00           | 0.494           | -174.2 | 8.090           | 80.6  | 0.058           | 48.6 | 0.243           | -103.6 |
| 900.00           | 0.497           | 179.8  | 7.203           | 76.9  | 0.062           | 49.0 | 0.229           | -109.7 |
| 1000.00          | 0.501           | 174.5  | 6.487           | 73.1  | 0.068           | 49.6 | 0.219           | -114.4 |
| 1100.00          | 0.505           | 170.0  | 5.907           | 69.8  | 0.072           | 49.5 | 0.213           | -119.6 |
| 1200.00          | 0.511           | 165.6  | 5.426           | 66.6  | 0.076           | 49.2 | 0.208           | -124.6 |
| 1300.00          | 0.518           | 161.8  | 5.010           | 63.5  | 0.081           | 48.9 | 0.209           | -129.5 |
| 1400.00          | 0.524           | 158.1  | 4.651           | 60.3  | 0.086           | 49.0 | 0.208           | -133.9 |
| 1500.00          | 0.531           | 154.7  | 4.343           | 57.4  | 0.090           | 48.4 | 0.211           | -138.7 |
| 1600.00          | 0.537           | 151.5  | 4.071           | 54.4  | 0.095           | 48.0 | 0.216           | -141.7 |
| 1700.00          | 0.546           | 148.7  | 3.819           | 51.4  | 0.099           | 47.6 | 0.221           | -146.9 |
| 1800.00          | 0.552           | 145.9  | 3.607           | 48.5  | 0.103           | 46.7 | 0.224           | -149.5 |
| 1900.00          | 0.561           | 143.0  | 3.402           | 45.5  | 0.108           | 46.2 | 0.234           | -154.6 |
| 2000.00          | 0.567           | 140.7  | 3.235           | 42.9  | 0.112           | 45.3 | 0.236           | -156.4 |
| 2100.00          | 0.576           | 137.8  | 3.060           | 40.1  | 0.117           | 44.8 | 0.249           | -161.6 |
| 2200.00          | 0.585           | 135.7  | 2.916           | 37.2  | 0.121           | 43.7 | 0.250           | -162.2 |
| 2300.00          | 0.589           | 133.1  | 2.763           | 34.7  | 0.126           | 43.2 | 0.266           | -167.5 |
| 2400.00          | 0.600           | 130.8  | 2.631           | 32.0  | 0.130           | 42.4 | 0.264           | -166.9 |
| 2500.00          | 0.601           | 128.7  | 2.524           | 30.0  | 0.134           | 41.7 | 0.284           | -171.1 |
| 2600.00          | 0.611           | 126.5  | 2.407           | 27.7  | 0.139           | 41.1 | 0.285           | -170.9 |
| 2700.00          | 0.616           | 124.9  | 2.325           | 24.8  | 0.144           | 40.3 | 0.308           | -175.1 |
| 2800.00          | 0.625           | 122.4  | 2.226           | 22.9  | 0.149           | 39.0 | 0.314           | -175.8 |
| 2900.00          | 0.632           | 120.9  | 2.135           | 20.2  | 0.154           | 37.8 | 0.331           | -178.6 |
| 3000.00          | 0.636           | 118.6  | 2.057           | 18.5  | 0.158           | 36.8 | 0.337           | 179.3  |

V<sub>CE</sub> = 5.0 V, I<sub>c</sub> = 30.0 mA, Z<sub>0</sub> = 50 Ω

| FREQUENCY<br>MHz | S <sub>11</sub> |        | S <sub>21</sub> |       | S <sub>12</sub> |      | S <sub>22</sub> |        |
|------------------|-----------------|--------|-----------------|-------|-----------------|------|-----------------|--------|
|                  | MAG             | ANG    | MAG             | ANG   | MAG             | ANG  | MAG             | ANG    |
| 100.00           | 0.572           | -64.3  | 38.635          | 142.3 | 0.018           | 64.8 | 0.780           | -38.5  |
| 200.00           | 0.521           | -105.1 | 27.544          | 120.4 | 0.028           | 53.5 | 0.567           | -61.5  |
| 300.00           | 0.496           | -129.7 | 20.521          | 107.8 | 0.033           | 50.0 | 0.427           | -75.6  |
| 400.00           | 0.487           | -146.1 | 15.977          | 99.8  | 0.038           | 50.1 | 0.346           | -86.2  |
| 500.00           | 0.485           | -157.1 | 13.055          | 92.9  | 0.043           | 50.5 | 0.291           | -94.3  |
| 600.00           | 0.484           | -166.1 | 11.019          | 87.8  | 0.047           | 51.4 | 0.260           | -100.7 |
| 700.00           | 0.486           | -173.3 | 9.493           | 83.2  | 0.052           | 52.7 | 0.235           | -107.4 |
| 800.00           | 0.489           | -179.3 | 8.343           | 79.4  | 0.057           | 52.8 | 0.219           | -113.0 |
| 900.00           | 0.493           | 175.2  | 7.411           | 75.8  | 0.062           | 53.3 | 0.210           | -119.7 |
| 1000.00          | 0.499           | 170.5  | 6.670           | 72.2  | 0.067           | 53.1 | 0.205           | -124.6 |
| 1100.00          | 0.504           | 166.5  | 6.077           | 69.0  | 0.072           | 53.2 | 0.200           | -130.2 |
| 1200.00          | 0.510           | 162.3  | 5.575           | 66.0  | 0.077           | 52.6 | 0.199           | -135.0 |
| 1300.00          | 0.516           | 158.9  | 5.148           | 63.1  | 0.082           | 52.7 | 0.203           | -139.3 |
| 1400.00          | 0.522           | 155.3  | 4.785           | 60.0  | 0.086           | 51.9 | 0.204           | -143.3 |
| 1500.00          | 0.529           | 152.2  | 4.465           | 57.2  | 0.092           | 51.1 | 0.209           | -147.8 |
| 1600.00          | 0.536           | 149.2  | 4.169           | 54.4  | 0.097           | 50.6 | 0.213           | -151.5 |
| 1700.00          | 0.544           | 146.4  | 3.928           | 51.4  | 0.101           | 49.8 | 0.221           | -155.4 |
| 1800.00          | 0.551           | 143.8  | 3.715           | 48.6  | 0.106           | 48.9 | 0.224           | -158.4 |
| 1900.00          | 0.560           | 141.0  | 3.496           | 45.7  | 0.111           | 47.9 | 0.235           | -163.5 |
| 2000.00          | 0.565           | 138.9  | 3.326           | 43.0  | 0.115           | 47.1 | 0.239           | -164.2 |
| 2100.00          | 0.574           | 136.0  | 3.136           | 40.2  | 0.120           | 46.4 | 0.253           | -168.8 |
| 2200.00          | 0.583           | 134.3  | 2.992           | 37.7  | 0.125           | 45.1 | 0.251           | -169.9 |
| 2300.00          | 0.586           | 131.6  | 2.835           | 35.1  | 0.129           | 44.4 | 0.268           | -174.6 |
| 2400.00          | 0.599           | 129.5  | 2.700           | 32.5  | 0.134           | 43.3 | 0.265           | -173.3 |
| 2500.00          | 0.599           | 127.4  | 2.599           | 30.7  | 0.138           | 42.7 | 0.288           | -177.8 |
| 2600.00          | 0.611           | 125.2  | 2.462           | 28.1  | 0.143           | 41.7 | 0.288           | -177.6 |
| 2700.00          | 0.614           | 123.7  | 2.382           | 25.6  | 0.148           | 40.7 | 0.310           | 178.8  |
| 2800.00          | 0.623           | 121.3  | 2.285           | 23.9  | 0.153           | 39.4 | 0.316           | 178.0  |
| 2900.00          | 0.631           | 119.8  | 2.188           | 21.2  | 0.158           | 38.1 | 0.331           | 175.3  |
| 3000.00          | 0.635           | 117.6  | 2.115           | 19.5  | 0.162           | 37.0 | 0.338           | 173.9  |



[MEMO]

[MEMO]

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Anti-radioactive design is not implemented in this product.

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.