

FAST RECOVERY RECTIFIERS

VOLTAGE RANGE: 200 --- 1000 V
CURRENT: 1.0 A


FEATURES

- ◇ Low cost
- ◇ Glass passivated junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- ◇ Case: JEDEC DO-41, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.34 grams
- ◇ Mounting position: Any

DO - 41

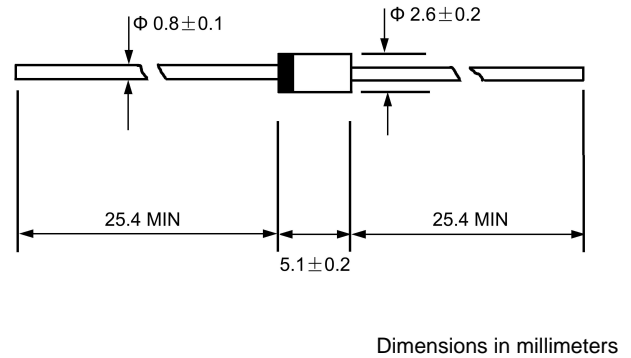

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		1N 4942G	1N 4944G	1N 4946G	1N 4947G	1N 4948G	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	200	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ C$	$I_{F(AV)}$	1.0					A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load T	I_{FSM}	30.0					A
Maximum instantaneous forward voltage @ 1.0 A	V_F	1.3					V
Maximum reverse current @ $T_A=25^\circ C$ at rated DC blocking voltage @ $T_A=125^\circ C$	I_R	5.0 100					μA
Maximum reverse recovery time (Note1)	t_{rr}	150	250		500		ns
Typical junction capacitance (Note2)	C_J	12					pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	55					$^\circ C/W$
Operating junction temperature range	T_J	- 55 ---- +150					$^\circ C$
Storage temperature range	T_{STG}	- 55 ---- + 150					$^\circ C$



NOTE: 1. Measured with $I_F=0.5A$, $I_R=1A$, $t_{rr}=0.25A$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

www.galaxycn.com


FIG.1 – REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

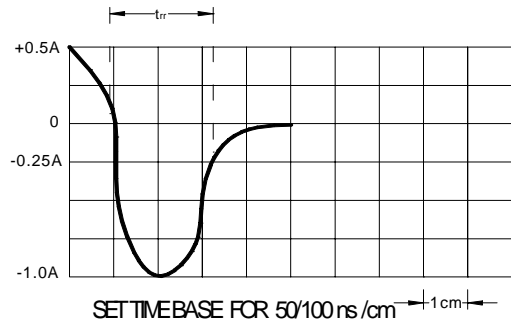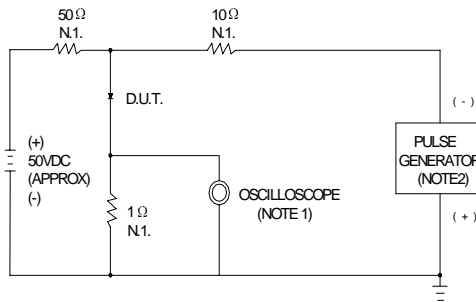

NOTES: 1. RISE TIME = 7ns MAX. INPUT IMPEDANCE = 1MΩ, 22pF
 2. RISE TIME = 10ns MAX. SOURCE IMPEDANCE = 50Ω

FIG.2 – FORWARD DERATING CURVE


AVERAGE FORWARD CURRENT
AMPERES

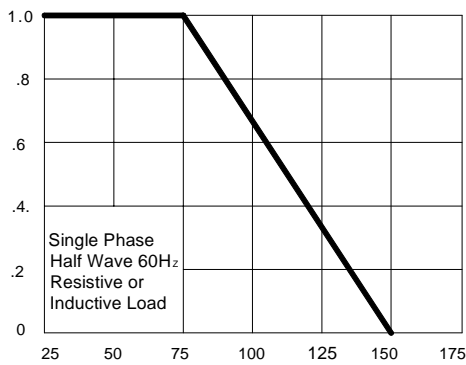

AMBIENT TEMPERATURE, °C

FIG.4 – PEAK FORWARD SURGE CURRENT


PEAK FORWARD SURGE CURRENT
AMPERES

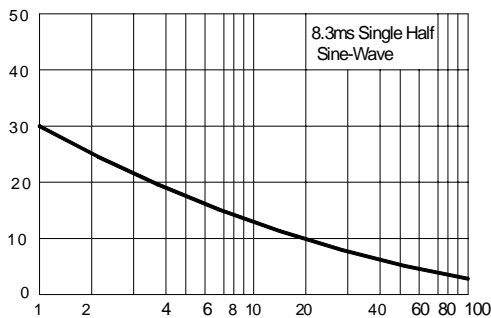

NUMBER OF CYCLES AT 60 Hz

FIG.3 – TYPICAL FORWARD CHARACTERISTICS


INSTANTANEOUS FORWARD CURRENT
AMPERES

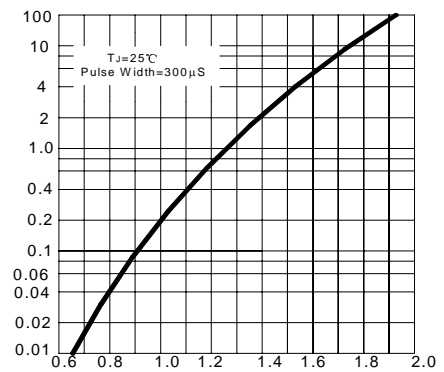

INSTANTANEOUS FORWARD VOLTAGE, VOLTS

FIG.5 – TYPICAL JUNCTION CAPACITANCE

JUNCTION CAPACITANCE, pF

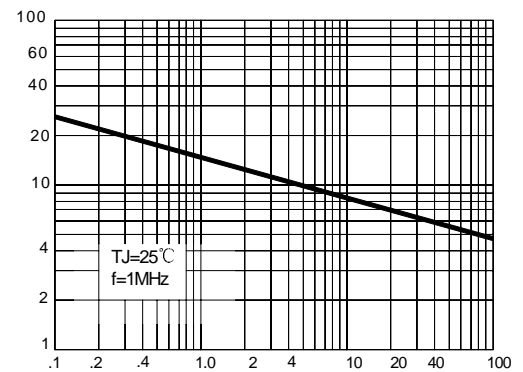

REVERSE VOLTAGE, VOLTS