



312 CABLE ASSEMBLY

Aerospace rated cable assembly for harsh installations. Standard cable length is 120 inches. Cable features safety wire holes, #24 AWG tin-plated copper conductors and 3-pin Glenair plug. Mates with accelerometer Model 7204A.


FEATURES

- Safety Wire Holes
- Cross-Linked ETFE Insulation and Jacket
- Tin-Plated Braided Shield
- #24 AWG Tin-Plated Copper Conductors
- -55°C to +150°C Temp Range


APPLICATIONS

- Health Usage Monitoring Systems
- Flight Testing
- Gearbox Vibration Monitoring
- Harsh Environments
- High Frequency

DIMENSIONS

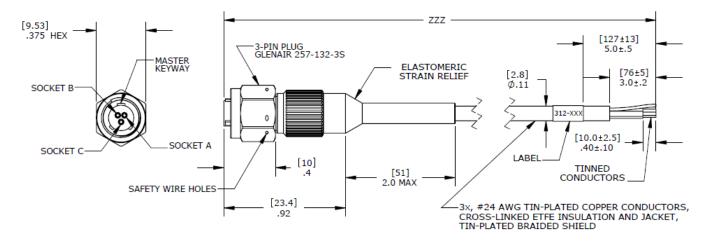

SCHEMATIC

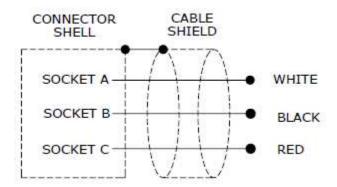

ORDERING INFORMATION

Cable length
120=120 inches (10ft)
240=240 inches (20ft)

Example; 312-120

Model 312 cable, 120inch cable length (standard length typically in stock)

NORTH AMERICA

Measurement Specialties, Inc., a TE Connectivity Company Tel: 800-522-6752 customercare.akrn@te.com

EUROPE

MEAS France SAS a TE Connectivity Company Tel: +31 73 624 6999 customercare.lcsb@te.com

ASIA

Measurement Specialties (China), Ltd., a TE Connectivity Company Tel: 0400-820-6015 customercare.shzn@te.com

te.com/sensorsolutions

TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, products and/or company names referred to herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2018 TE Connectivity Ltd. family of companies All Rights Reserved.

