


SMT-Type Zener Diode

BZX84B2V0 - BZX84B75

FEATURES

- Large selection of zener voltages: 2.0V ~ 75V
- Tight voltage tolerance: $\pm 2\%$ for B-series
- Ultra low-profile package well suited for automated assembly
- MSL Class 1 compatible

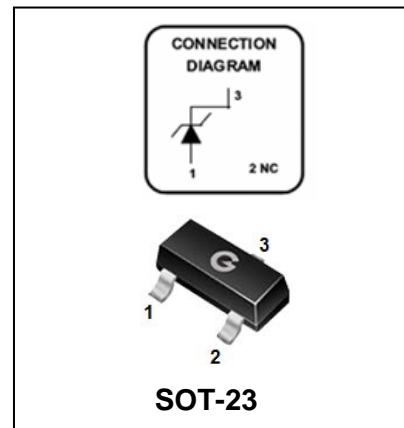

APPLICATIONS

- General voltage regulation
- Mobile & handheld systems

ORDERING INFORMATION

Part Number	Marking	Package
BZX84B2V0 - BZX84B75□	See Electrical Characteristics	SOT-23

Notes for □: none is for Lead-free package
"G" is for Halogen-free package

MAXIMUM RATING (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Forward Voltage @ $I_F=10\text{mA}$	V_F	0.9	V
Power Dissipation (Collector)	P_C	350	mW
Thermal Resistance (Junction-to-Ambient)	$R_{\theta JA}$	357	$^\circ\text{C/W}$
Thermal Resistance (Junction-to-Case)	$R_{\theta JC}$	295	$^\circ\text{C/W}$
Junction Temperature Range	T_J	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 ~ +150	$^\circ\text{C}$

Note: These ratings are limiting values above which the serviceability of the diodes may be impaired.

SMT-Type Zener Diode

BZX84B2V0 - BZX84B75

ELECTRICAL CHARACTERISTICS (@ T_A = 25°C unless otherwise specified)

Part Number	Marking Code	Zener Voltage V _Z (V)			@ I _{ZT} (mA)	Maximum Zener Impedance			Maximum Reverse Current I _R (μA)	@ V _R (V)
		Min.	Typ.	Max.		Z _{ZT} (Ω) @ I _{ZT}	Z _{ZK} (Ω)	@ I _{ZK} (mA)		
BZX84B2V0	Z49	1.96	2.00	2.04	5	100	1000	0.5	120.000	0.5
BZX84B2V2	Z87	2.16	2.20	2.24	5	100	1000	0.5	120.000	0.7
BZX84B2V4	Z50	2.35	2.40	2.45	5	100	600	1.0	50.000	1.0
BZX84B2V7	Z51	2.65	2.70	2.75	5	100	600	1.0	20.000	1.0
BZX84B3V0	Z52	2.94	3.00	3.06	5	95	600	1.0	10.000	1.0
BZX84B3V3	Z53	3.23	3.30	3.37	5	95	600	1.0	5.000	1.0
BZX84B3V6	Z54	3.53	3.60	3.67	5	90	600	1.0	5.000	1.0
BZX84B3V9	Z55	3.82	3.90	3.98	5	90	600	1.0	3.000	1.0
BZX84B4V3	Z56	4.21	4.30	4.39	5	90	600	1.0	3.000	1.0
BZX84B4V7	Z57	4.61	4.70	4.79	5	80	500	1.0	3.000	2.0
BZX84B5V1	Z58	5.00	5.10	5.20	5	60	480	1.0	2.000	2.0
BZX84B5V6	Z59	5.49	5.60	5.71	5	40	400	1.0	1.000	2.0
BZX84B6V2	Z60	6.08	6.20	6.32	5	10	150	1.0	3.000	4.0
BZX84B6V8	Z61	6.66	6.80	6.94	5	15	80	1.0	2.000	4.0
BZX84B7V5	Z62	7.35	7.50	7.65	5	15	80	1.0	1.000	5.0
BZX84B8V2	Z63	8.04	8.20	8.36	5	15	80	1.0	0.700	5.0
BZX84B9V1	Z64	8.92	9.10	9.28	5	15	100	1.0	0.500	6.0
BZX84B10	Z65	9.80	10.00	10.20	5	20	150	1.0	0.200	7.0
BZX84B11	Z66	10.78	11.00	11.22	5	20	150	1.0	0.100	8.0
BZX84B12	Z67	11.76	12.00	12.24	5	25	150	1.0	0.100	8.0
BZX84B13	Z68	12.74	13.00	13.26	5	30	170	1.0	0.100	8.0
BZX84B15	Z69	14.70	15.00	15.30	5	30	200	1.0	0.050	10.5
BZX84B16	Z70	15.68	16.00	16.32	5	40	200	1.0	0.050	11.2
BZX84B18	Z71	17.64	18.00	18.36	5	45	225	1.0	0.050	12.6
BZX84B20	Z72	19.60	20.00	20.40	5	55	225	1.0	0.050	14.0
BZX84B22	Z73	21.56	22.00	22.44	5	55	250	1.0	0.050	15.4
BZX84B24	Z74	23.52	24.00	24.48	5	70	250	1.0	0.050	16.8
BZX84B27	Z75	26.46	27.00	27.54	2	80	300	0.5	0.050	18.9
BZX84B30	Z76	29.40	30.00	30.60	2	80	300	0.5	0.050	21.0
BZX84B33	Z77	32.34	33.00	33.66	2	80	325	0.5	0.050	23.1
BZX84B36	Z78	35.28	36.00	36.72	2	90	350	0.5	0.050	25.2
BZX84B39	Z79	38.22	39.00	39.78	2	130	350	0.5	0.050	27.3
BZX84B43	Z80	42.14	43.00	43.86	2	150	375	0.5	0.050	30.1
BZX84B47	Z81	46.06	47.00	47.94	2	170	375	0.5	0.050	32.9
BZX84B51	Z82	49.98	51.00	52.02	2	180	400	0.5	0.050	35.7
BZX84B56	Z83	54.88	56.00	57.12	2	200	400	0.5	0.045	39.2
BZX84B62	Z84	60.76	62.00	63.24	2	215	423	0.5	0.045	43.4
BZX84B68	Z85	66.64	68.00	69.36	2	240	447	0.5	0.045	47.6
BZX84B75	Z86	73.50	75.00	76.50	2	255	470	0.5	0.045	52.5

SMT-Type Zener Diode

BZX84B2V0 - BZX84B75

TYPICAL CHARACTERISTICS (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

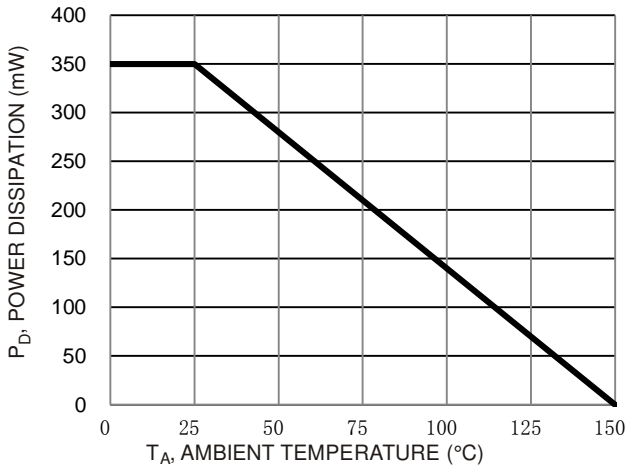


Fig. 1 Power Derating Curve

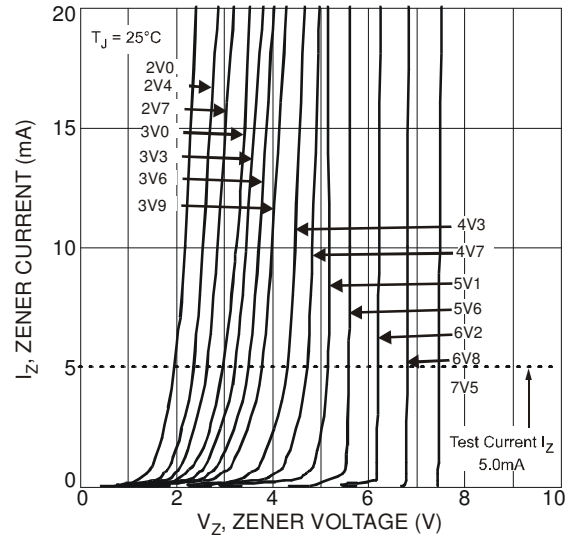


Fig. 2 Typical Zener Breakdown Characteristics

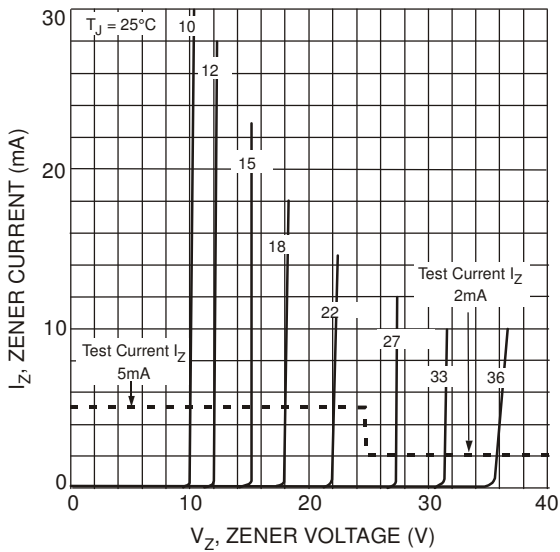


Fig. 3 Typical Zener Breakdown Characteristics

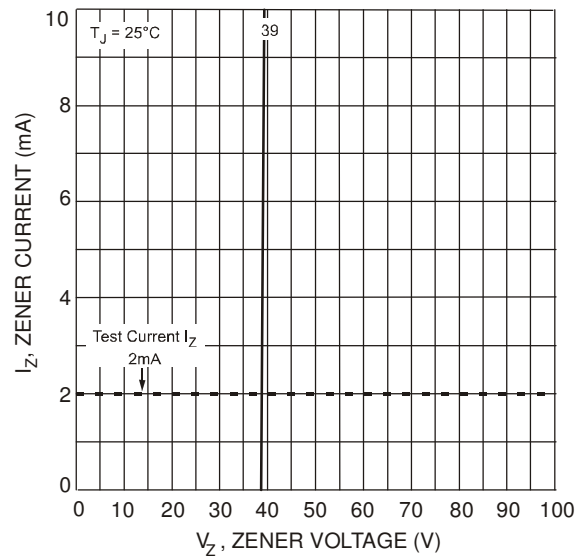



Fig. 4 Typical Zener Breakdown Characteristics

SMT-Type Zener Diode


BZX84B2V0 - BZX84B75

PACKAGE OUTLINE (Unit: mm)

Plastic surface mounted package

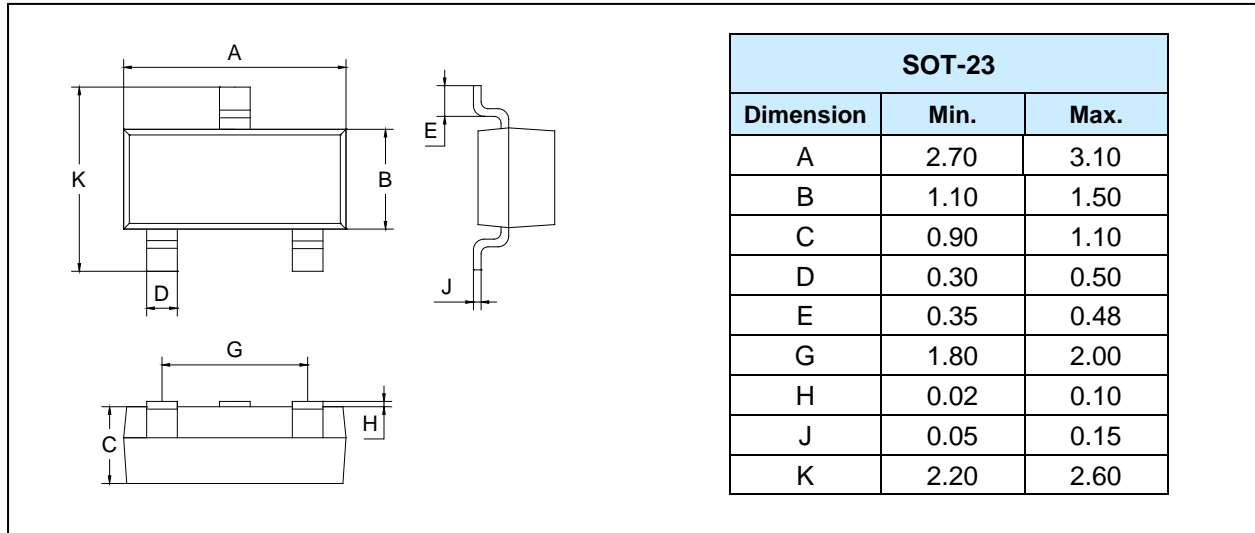

MOUNTING PAD LAYOUT (Unit: mm)

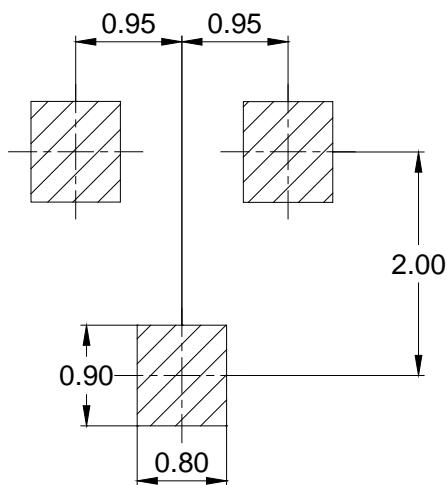

PACKAGE INFORMATION

Part Number	Package	Shipping Quantity
BZX84B2V0 - BZX84B75□	SOT-23	3000pcs / Tape & Reel

SMT-Type Zener Diode

BZX84B2V0 - BZX84B75

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.