


SMT-Type Zener Diode

BZT52B2V0-BZT52B75

FEATURES

- Large selection of zener voltages: 2.0V ~ 75V
- Tight voltage tolerance: $\pm 2\%$ for B-series
- Ultra low-profile package well suited for automated assembly
- MSL Class 1 compatible

HF

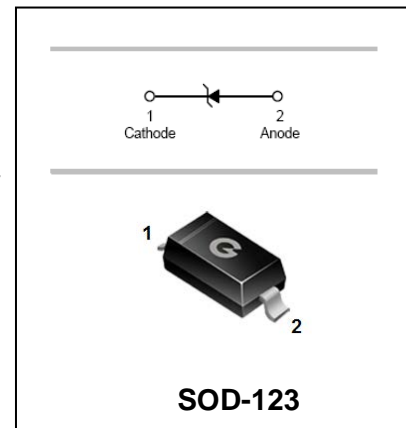

APPLICATIONS

- General voltage regulation
- Mobile & handheld systems

ORDERING INFORMATION

Part Number	Marking	Package
BZT52B2V0 - BZT52B75	See Electrical Characteristics	SOD-123

MAXIMUM RATING (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Forward Voltage @ $I_F = 10\text{mA}$	V_F	0.9	V
Power Dissipation	P_D	500	mW
Thermal Resistance (Junction-to-Ambient)	$R_{\theta JA}$	250	$^\circ\text{C/W}$
Thermal Resistance (Junction-to-Case)	$R_{\theta JC}$	140	$^\circ\text{C/W}$
Junction Temperature Range	T_J	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 ~ +150	$^\circ\text{C}$

Note: These ratings are limiting values above which the serviceability of the diodes may be impaired.

SMT-Type Zener Diode

BZT52B2V0-BZT52B75

ELECTRICAL CHARACTERISTICS (@ T_A = 25°C unless otherwise specified)

Part Number	Marking Code	Zener Voltage V _Z (V)			@ I _{ZT} (mA)	Maximum Zener Impedance			Temperature Coefficient @ I _{ZT} T _C (mV/°C)		Maximum Reverse Current I _R (μA)	@ V _R (V)
		Min.	Typ.	Max.		Z _{ZT} (Ω) @ I _{ZT}	Z _{ZK} (Ω)	@ I _{ZK} (mA)	Min.	Max.		
BZT52B2V0	WX•	1.96	2.00	2.04	5	100	1000	0.5	-3.5	0.0	120.000	0.5
BZT52B2V2	WY•	2.16	2.20	2.24	5	100	1000	0.5	-3.5	0.0	120.000	0.7
BZT52B2V4	W1•	2.35	2.40	2.45	5	94	564	1.0	-3.5	0.0	45.000	1.0
BZT52B2V7	W2•	2.65	2.70	2.75	5	94	564	1.0	-3.5	0.0	18.000	1.0
BZT52B3V0	W3•	2.94	3.00	3.06	5	89	564	1.0	-3.5	0.0	9.000	1.0
BZT52B3V3	W4•	3.23	3.30	3.37	5	89	564	1.0	-3.5	0.0	4.500	1.0
BZT52B3V6	W5•	3.53	3.60	3.67	5	84	564	1.0	-3.5	0.0	4.500	1.0
BZT52B3V9	W6•	3.82	3.90	3.98	5	84	564	1.0	-3.5	0.0	2.700	1.0
BZT52B4V3	W7•	4.21	4.30	4.39	5	84	564	1.0	-3.5	0.0	2.700	1.0
BZT52B4V7	W8•	4.61	4.70	4.79	5	75	564	1.0	-3.5	0.2	2.700	2.0
BZT52B5V1	W9•	5.00	5.10	5.20	5	56	470	1.0	-2.7	1.2	1.800	2.0
BZT52B5V6	WA•	5.49	5.60	5.71	5	37	451	1.0	-2.0	2.5	0.900	2.0
BZT52B6V2	WB•	6.08	6.20	6.32	5	9	376	1.0	0.4	3.7	2.700	4.0
BZT52B6V8	WC•	6.66	6.80	6.94	5	14	141	1.0	1.2	4.5	1.800	4.0
BZT52B7V5	WD•	7.35	7.50	7.65	5	14	75	1.0	2.5	5.3	0.900	5.0
BZT52B8V2	WE•	8.04	8.20	8.36	5	14	75	1.0	3.2	6.2	0.630	5.0
BZT52B9V1	WF•	8.92	9.10	9.28	5	14	94	1.0	3.8	7.0	0.450	6.0
BZT52B10	WG•	9.80	10.00	10.20	5	18	141	1.0	4.5	8.0	0.180	7.0
BZT52B11	WH•	10.78	11.00	11.22	5	18	141	1.0	5.4	9.0	0.090	8.0
BZT52B12	WI•	11.76	12.00	12.24	5	23	141	1.0	6.0	10.0	0.090	8.0
BZT52B13	WJ•	12.74	13.00	13.26	5	28	160	1.0	7.0	11.0	0.090	8.0
BZT52B15	WK•	14.70	15.00	15.30	5	28	188	1.0	9.2	13.0	0.045	10.5
BZT52B16	WL•	15.68	16.00	16.32	5	37	188	1.0	10.4	14.0	0.045	11.2
BZT52B18	WM•	17.64	18.00	18.36	5	42	212	1.0	12.4	16.0	0.045	12.6
BZT52B20	WN•	19.60	20.00	20.40	5	51	212	1.0	14.4	18.0	0.045	14.0
BZT52B22	WO•	21.56	22.00	22.44	5	51	235	1.0	16.4	20.0	0.045	15.4
BZT52B24	WP•	23.52	24.00	24.48	5	65	235	1.0	18.4	22.0	0.045	16.8
BZT52B27	WQ•	26.46	27.00	27.54	2	75	282	0.5	21.4	25.3	0.045	18.9
BZT52B30	WR•	29.40	30.00	30.60	2	75	282	0.5	24.4	29.4	0.045	21.0
BZT52B33	WS•	32.34	33.00	33.66	2	75	306	0.5	27.4	33.4	0.045	23.0
BZT52B36	WT•	35.28	36.00	36.72	2	84	329	0.5	30.4	37.4	0.045	25.2
BZT52B39	WU•	38.22	39.00	39.78	2	122	329	0.5	33.4	41.2	0.045	27.3
BZT52B43	WV•	42.14	43.00	43.86	2	141	353	0.5	37.6	46.6	0.045	30.1
BZT52B47	WW•	46.06	47.00	47.94	2	160	353	0.5	42.0	51.8	0.045	33.0
BZT52B51	X1•	49.98	51.00	52.02	2	169	376	0.5	46.6	57.2	0.045	35.7
BZT52B56	X2•	54.88	56.00	57.12	2	200	400	0.5	52.2	63.8	0.045	39.2
BZT52B62	X3•	60.76	62.00	63.24	2	215	423	0.5	58.8	71.6	0.045	43.4
BZT52B68	X4•	66.64	68.00	69.36	2	240	447	0.5	65.6	79.8	0.045	47.6
BZT52B75	X5•	73.50	75.00	76.50	2	255	470	0.5	73.4	88.6	0.045	52.5

SMT-Type Zener Diode

BZT52B2V0-BZT52B75

TYPICAL CHARACTERISTICS (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

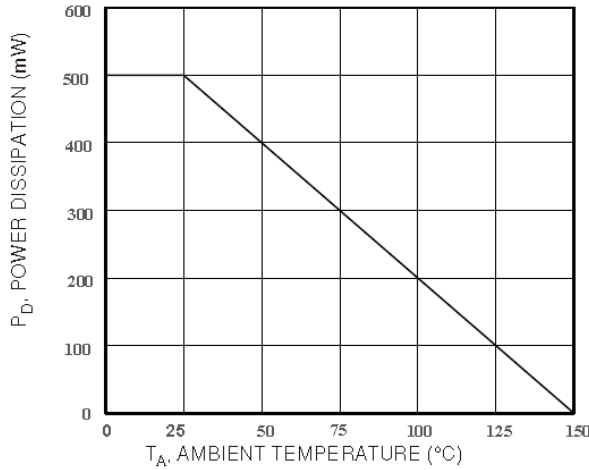


Fig. 1 Power Derating Curve

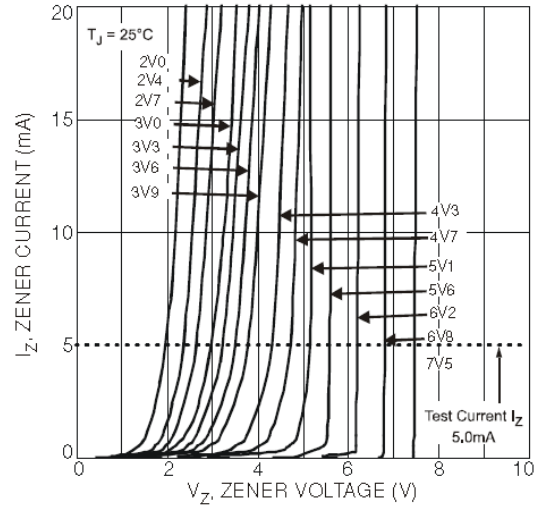


Fig. 2 Typical Zener Breakdown Characteristics

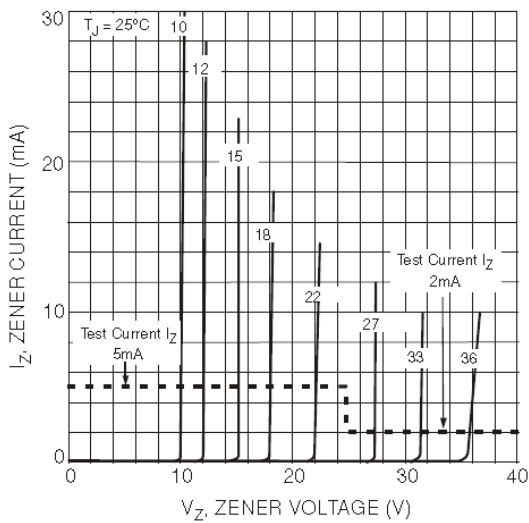


Fig. 3 Typical Zener Breakdown Characteristics

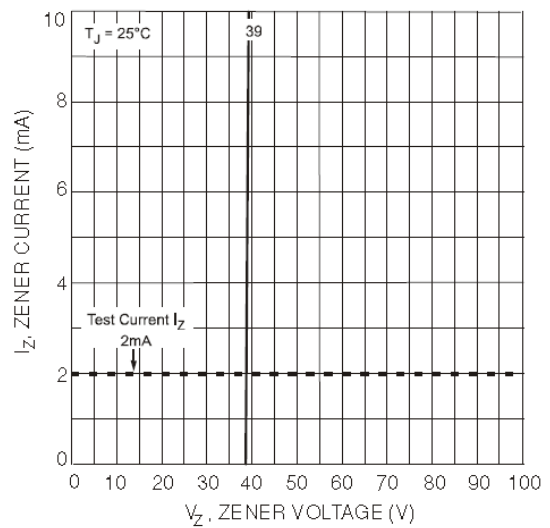


Fig. 4 Typical Zener Breakdown Characteristics

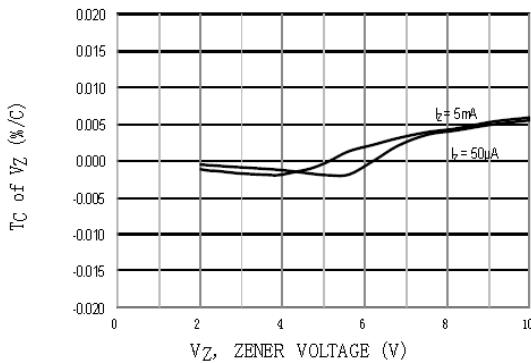


Fig. 5 Typical Temperature Coefficient of Zener Voltage

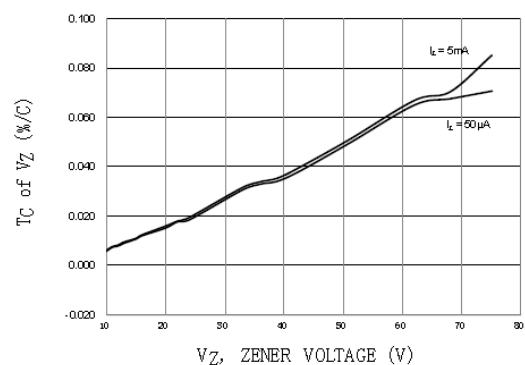



Fig. 6 Typical Temperature Coefficient of Zener Voltage

SMT-Type Zener Diode


BZT52B2V0-BZT52B75

PACKAGE OUTLINE (Unit: mm)

Plastic surface mounted package

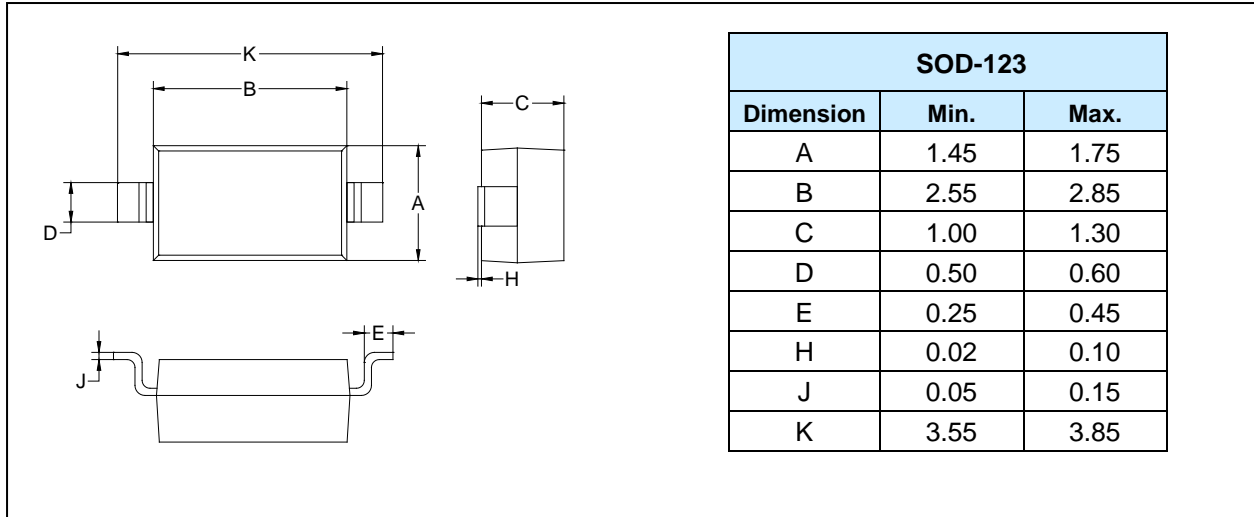

MOUNTING PAD LAYOUT (Unit: mm)

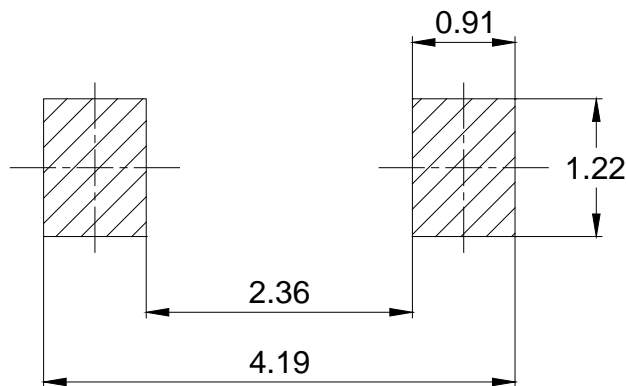

PACKAGE INFORMATION

Part Number	Package	Shipping Quantity
BZT52B2V0 - BZT52B75	SOD-123	3000pcs / Tape & Reel

SMT-Type Zener Diode**BZT52B2V0-BZT52B75**

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.