



SMAJ4728A thru SMAJ4764A

Surface Mount Silicon Zener Diodes

Reverse Voltage 3.3 to 100 Volts
Power Dissipation - 1.0 Watts

FEATURES


- For surface mounted application (flat handing surface for Accurate placement)
- High Surge Current Rating
- Higher Voltages Available
- Available on Tape and Reel

MECHANICAL DATA

- Case : JEDEC DO-214AC molded plastic body over passivated chip
- Terminals solderable per MIL-STD-750, Method 2026
- Polarity is indicated by cathode band.
- Maximum temperature for soldering: 260°C for 10 seconds.
- For surface mount application with flame retardent epoxy Meeting UL 94V-0

Note: Products with logo  or  are made by HY Electronic (Cayman) Limited.

SMA

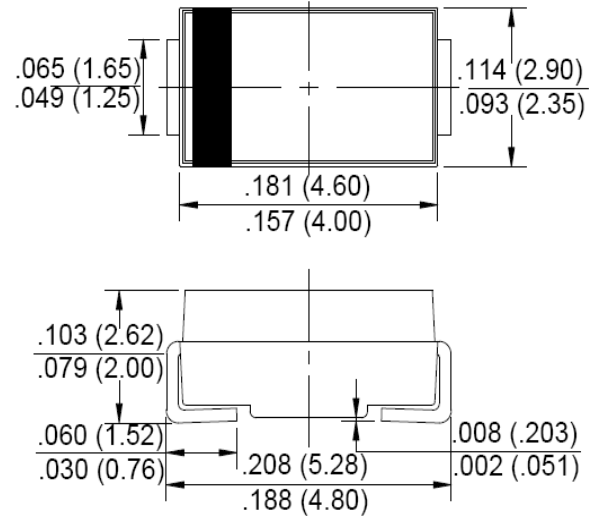

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	VALUE	UNIT
Peak Surge Current	I _s	See Table 1	
Maximum Forward Voltage (Note:1)	V _F	1.2	VOLTS
Steady State Power Dissipation at (Note:2,3)	P _(AV)	1.0	WATTS
Operating Temperature Range	T _J	-55 to + 150	°C
Storage Temperature Range	T _{STG}	-55 to + 150	°C

NOTES:1. Forward Current @ 200 mA.

2. Mounted on 4.0mm² copper pads to each terminal,

3. Lead temperature at 100°C or less. Derate linearly above 100°C to zero power at 150°C.



SMAJ4728A thru SMAJ4764A


PART NUMBER	ZENER VOLTAGE Vz	TEST CURRENT Izt	MAXIMUM DYNAMIC IMPEDANCE Zzt@Izt	MAXIMUM REVERSE CURRENT Ir@Vr	TEST VOLTAGE Vr	MAXIMUM REGULATORY CURRENT Izm Ta=50°C	MAXIMUM KNEE IMPEDANCE Zzk@Izk	TEST CURRENT Izk	MAXIMUM SURGE CURRENT Is
	VOLTS	mA	OHMS	μA	VOLTS	mA	OHMS	mA	mA
SMAJ4728A	3.3	76	10	100	1	276	400	1	1380
SMAJ4729A	3.6	69	10	100	1	252	400	1	1260
SMAJ4730A	3.9	64	9	50	1	234	400	1	1190
SMAJ4731A	4.3	58	9	10	1	217	400	1	1070
SMAJ4732A	4.7	53	8	10	1	193	500	1	970
SMAJ4733A	5.1	49	7	10	1	178	550	1	890
SMAJ4734A	5.6	45	5	10	2	162	600	1	810
SMAJ4735A	6.2	41	2	10	3	146	700	1	730
SMAJ4736A	6.8	37	3.5	10	4	133	700	1	660
SMAJ4737A	7.5	34	4.0	10	5	121	700	0.5	605
SMAJ4738A	8.2	31	4.5	10	6	110	700	0.5	550
SMAJ4739A	9.1	28	5.0	10	7	100	700	0.5	500
SMAJ4740A	10	25	7	10	7.6	91	700	0.25	454
SMAJ4741A	11	23	8	5	8.4	83	700	0.25	414
SMAJ4742A	12	21	9	5	9.1	76	700	0.25	380
SMAJ4743A	13	19	10	5	9.9	69	700	0.25	344
SMAJ4744A	15	17	14	5	11.4	61	700	0.25	304
SMAJ4745A	16	15.5	16	5	12.2	57	700	0.25	285
SMAJ4746A	18	14	20	5	13.7	50	750	0.25	250
SMAJ4747A	20	12.5	22	5	15.2	45	750	0.25	225
SMAJ4748A	22	11.5	23	5	16.7	41	750	0.25	205
SMAJ4749A	24	10.5	25	5	18.2	38	750	0.25	190
SMAJ4750A	27	9.5	35	5	20.6	34	750	0.25	170
SMAJ4751A	30	8.5	40	5	22.8	30	1000	0.25	150
SMAJ4752A	33	7.5	45	5	25.1	27	1000	0.25	135
SMAJ4753A	36	7.0	50	5	27.4	25	1000	0.25	125
SMAJ4754A	39	6.5	60	5	29.4	23	1000	0.25	115
SMAJ4755A	43	6.0	70	5	32.7	22	1500	0.25	110
SMAJ4756A	47	5.5	80	5	35.8	19	1500	0.25	95
SMAJ4757A	51	5.0	95	5	38.8	18	1500	0.25	90
SMAJ4758A	56	4.5	110	5	42.6	16	2000	0.25	80
SMAJ4759A	62	4.0	125	5	47.1	14	2000	0.25	70
SMAJ4760A	68	3.7	150	5	51.7	13	2000	0.25	65
SMAJ4761A	75	3.3	175	5	56.0	12	2000	0.25	60
SMAJ4762A	82	3.0	200	5	62.2	11	3000	0.25	55
SMAJ4763A	91	2.8	250	5	69.2	10	3000	0.25	50
SMAJ4764A	100	2.5	350	5	76.0	9	3000	0.25	45

- Notes 1. The zener impedance is derived from the 60Hz AC voltage, which results when an AC current having an rms value equal to 10% of the DC zener current (Izt or Izk) is superimposed on Izk. Zener impedance is measured at two points to insure a sharp knee on the breakdown curve and eliminate unstable units.
2. The reverse surge current is measured at 25°C ambient using a 1/2 square wave or equivalent sine wave pulse 1/20 second duration superimposed on Izt
3. Voltage measurements to be performed 90 seconds after application of DC current.
4. Standard voltage tolerance is 10 %, Suffix A ± 5 %.



Admissible power dissipation versus ambient temperature

Valid provided that leads are kept at ambient
temperature at a distance of 10 mm from case

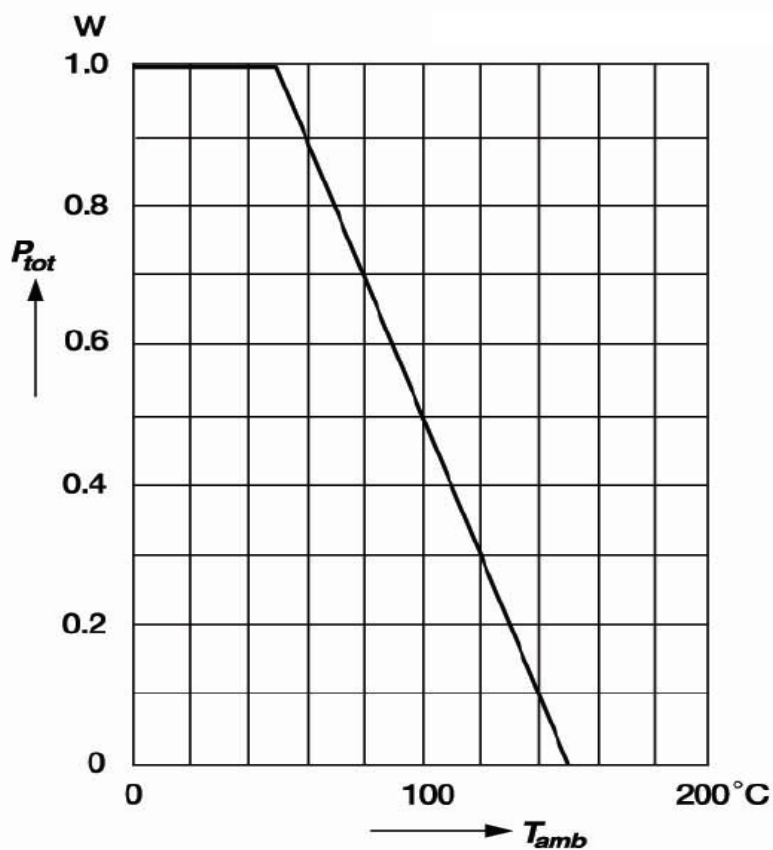

The curve above is for reference only.



Disclaimer

ALL specifications and data are subject to be changed without notice to improve reliability function or design or other reasons.

HY makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, HY disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on HY's knowledge of typical requirements that are often placed on HY products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify HY's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, HY products are not designed for use in medical, life-saving, or life-sustaining applications or for any other applications in which the failure of the HY product could result in personal injury or death. Customers using or selling HY products not expressly indicated for use in such applications do so at their own risk. Please contact authorized HY personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of HY. Product names and markings noted herein may be trademarks of their respective owners.