

SMA6JxxxXX Series transient voltage suppressors are excellent overvoltage protective devices.

The Series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.



SMA (DO-214AC)

Features

- Excellent clamping capability
- Low leakage current
- Low capacitance
- High surge capability
- Glass passivated chip
- Epoxy resin package
- Built-in strain relief
- Will not fatigue
- RoHS Compliant
- Fast response time: typically less than 1.0ps from 0 Volts to V_{BR} min

Mechanical Characteristics

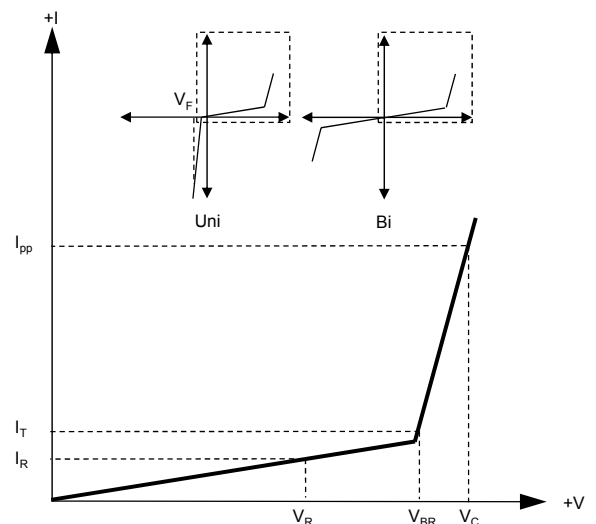
- Package: SMA plastic package.
- Lead Finish: Matte Tin
- Case Material: Epoxy Molding Compound.
- UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020

Applications

- Telecom
- Computer
- Industrial electronic
- Consumer electronic

Electrical Parameters

| Parameter | Definition |
|-----------|--|
| C_J | Junction Capacitance - typical capacitance measured with 0V or V_R bias |
| I_{PP} | Peak Pulse Current - maximum rated peak impulse current |
| V_C | Clamping Voltage - Peak voltage measured across the suppressor at a specified I_{ppm} (peak impulse current) |
| V_{BR} | Breakdown Voltage - Maximum voltage that flows through the TVS at a specified test current (I_T) |
| I_R | Leakage Current - maximum peak off-state current measured at V_R |
| V_R | Peak Off-state Voltage - maximum voltage that can be applied while maintaining off state |



Summary of Packing Options

| Package | Packing Description | Packing Quantity | Industry Standard |
|---------|---------------------|------------------|-------------------|
| SMA | Tape/Reel, 11" reel | 5000 | EIA-481-1 |
| | Tape/Reel, 7" reel | 2000 | EIA-481-1 |

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Value | Units | Remarks |
|--|-----------------|------------|--------------------|----------------|
| Peak Pulse Power Dissipation | P_{PPM} | 600 | W | (Note1)(Note2) |
| Steady State Power Dissipation | P_D | 3.3 | W | (Note3) |
| Peak Forward Surge Current | I_{FSM} | 60 | A | (Note4) |
| Maximum Instantaneous Forward Voltage at 25A | V_{FM} | 3.5/6.5 | V | (Note5) |
| Typical Thermal Resistance Junction to Lead | $R_{\theta JL}$ | 30 | $^\circ\text{C/W}$ | |
| Typical Thermal Resistance Junction to Ambient | $R_{\theta JA}$ | 120 | $^\circ\text{C/W}$ | |
| Operating Temperature Range | T_J | -55 to 150 | $^\circ\text{C}$ | |
| Storage Temperature Range | T_{STG} | -55 to 150 | $^\circ\text{C}$ | |

Notes1: Non-repetitive current pulse , 10/1000us Waveform.

Notes2: Mounted on copper pad area of 5×5mm to each terminal.

Notes3: Infinite HeatSink at $T_A=50^\circ\text{C}$

Notes4: Measured on 8.3ms single half sine wave or equivalent square wave, duty cycle=4 perminute maximum.

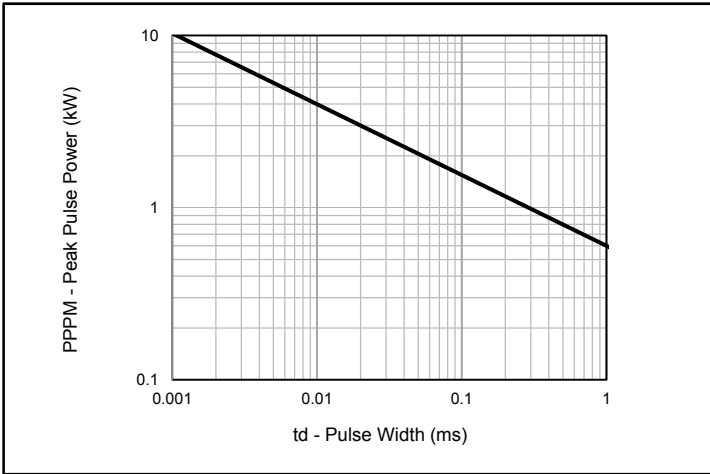
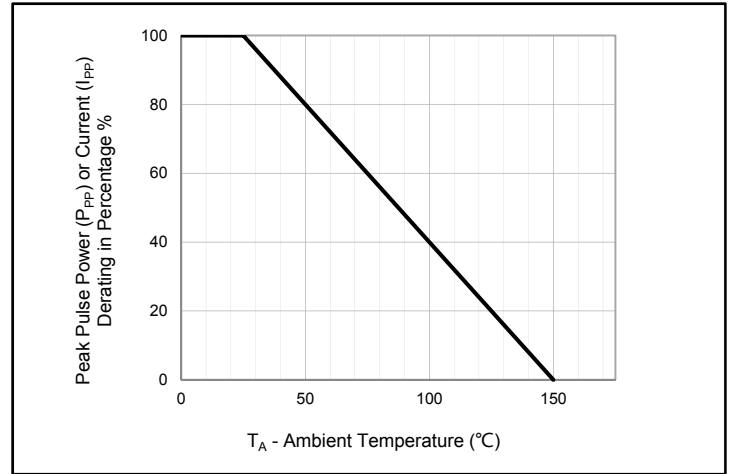
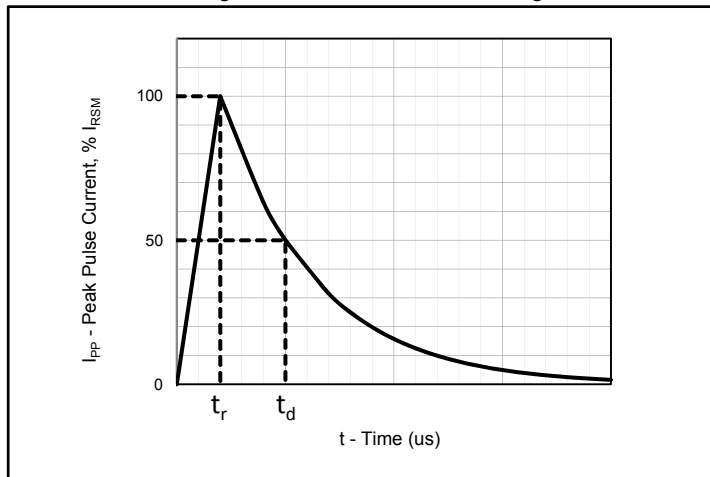
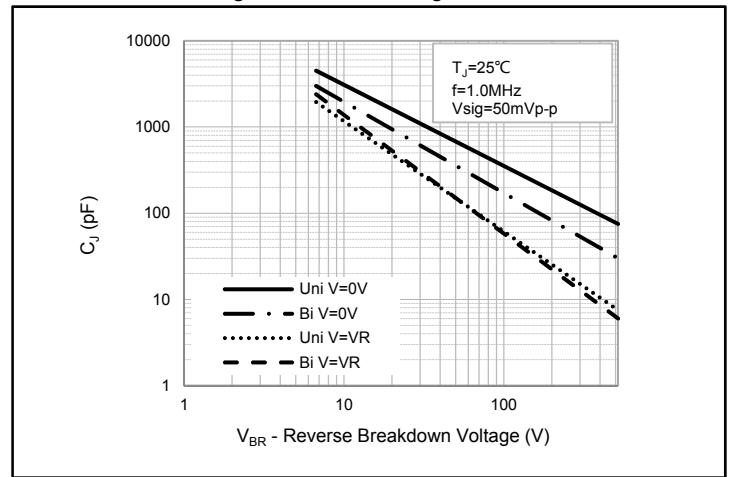
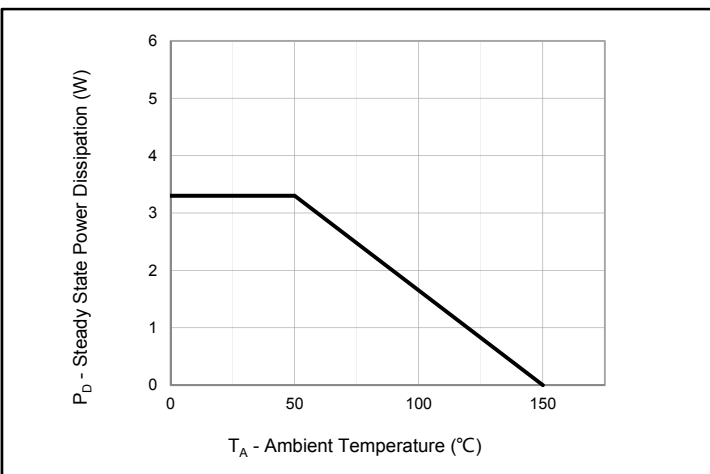
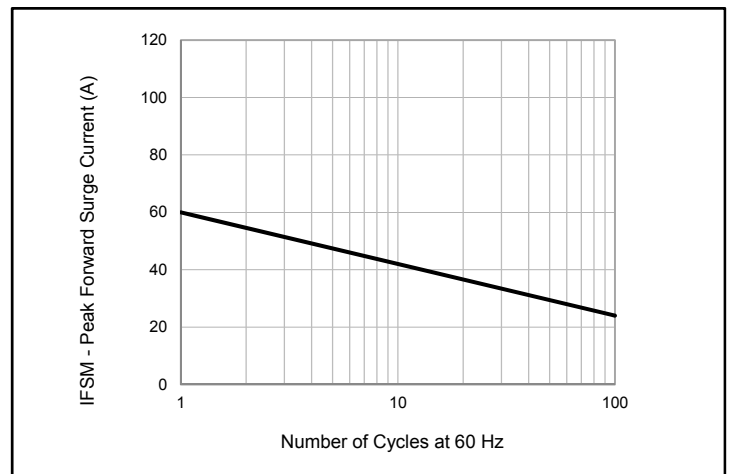
Notes5: For UnidirectionalOnly, $V_{FM}<3.5\text{V}$ for $V_{BR} \leq 200\text{V}$ and $V_{FM}<5.0\text{V}$ for $V_{BR} \geq 201\text{V}$.

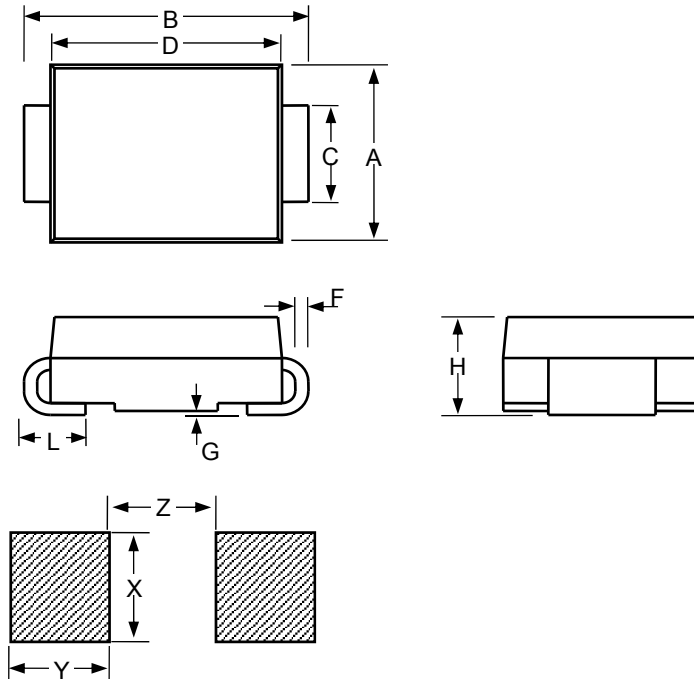
Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

| Part Number (Uni) | Part Number (Bi) | Marking Code | | Reverse Stand off Voltage V_R (V) | Breakdown Voltage $V_{BR} @ I_T$ (V) | | Test Current I_T (mA) | Maximum Clamping Voltage $V_C @ I_{PP}$ (V) | Maximum Peak Pulse Current I_{PP} (A) | Maximun Reverse Leakage $I_R @ V_R$ (μA) |
|-------------------|------------------|--------------|-----|-------------------------------------|--------------------------------------|------|-------------------------|---|---|---|
| | | Uni | Bi | | Min | Max | | | | |
| SMA6J5.0A | SMA6J5.0CA | 6AE | 6WE | 5 | 6.4 | 7 | 10 | 9.2 | 65.3 | 800 |
| SMA6J6.0A | SMA6J6.0CA | 6AG | 6WG | 6 | 6.67 | 7.37 | 10 | 10.3 | 58.3 | 800 |
| SMA6J6.5A | SMA6J6.5CA | 6AK | 6WK | 6.5 | 7.22 | 7.98 | 10 | 11.2 | 53.6 | 500 |
| SMA6J7.0A | SMA6J7.0CA | 6AM | 6WM | 7 | 7.78 | 8.6 | 10 | 12 | 50 | 200 |
| SMA6J7.5A | SMA6J7.5CA | 6AP | 6WP | 7.5 | 8.33 | 9.21 | 1 | 12.9 | 46.6 | 100 |
| SMA6J8.0A | SMA6J8.0CA | 6AR | 6WR | 8 | 8.89 | 9.83 | 1 | 13.6 | 44.2 | 50 |
| SMA6J8.5A | SMA6J8.5CA | 6AT | 6WT | 8.5 | 9.44 | 10.4 | 1 | 14.4 | 41.7 | 20 |
| SMA6J9.0A | SMA6J9.0CA | 6AV | 6WV | 9 | 10 | 11.1 | 1 | 15.4 | 39 | 10 |
| SMA6J10A | SMA6J10CA | 6AX | 6WX | 10 | 11.1 | 12.3 | 1 | 17 | 35.3 | 5 |
| SMA6J11A | SMA6J11CA | 6AZ | 6WZ | 11 | 12.2 | 13.5 | 1 | 18.2 | 33 | 1 |
| SMA6J12A | SMA6J12CA | 6BE | 6XE | 12 | 13.3 | 14.7 | 1 | 19.9 | 30.2 | 1 |
| SMA6J13A | SMA6J13CA | 6BG | 6XG | 13 | 14.4 | 15.9 | 1 | 21.5 | 28 | 1 |
| SMA6J14A | SMA6J14CA | 6BK | 6XK | 14 | 15.6 | 17.2 | 1 | 23.2 | 25.9 | 1 |
| SMA6J15A | SMA6J15CA | 6BM | 6XM | 15 | 16.7 | 18.5 | 1 | 24.4 | 24.6 | 1 |
| SMA6J16A | SMA6J16CA | 6BP | 6XP | 16 | 17.8 | 19.7 | 1 | 26 | 23.1 | 1 |
| SMA6J17A | SMA6J17CA | 6BR | 6XR | 17 | 18.9 | 20.9 | 1 | 27.6 | 21.8 | 1 |
| SMA6J18A | SMA6J18CA | 6BT | 6XT | 18 | 20 | 22.1 | 1 | 29.2 | 20.6 | 1 |
| SMA6J20A | SMA6J20CA | 6BV | 6XV | 20 | 22.2 | 24.5 | 1 | 32.4 | 18.6 | 1 |

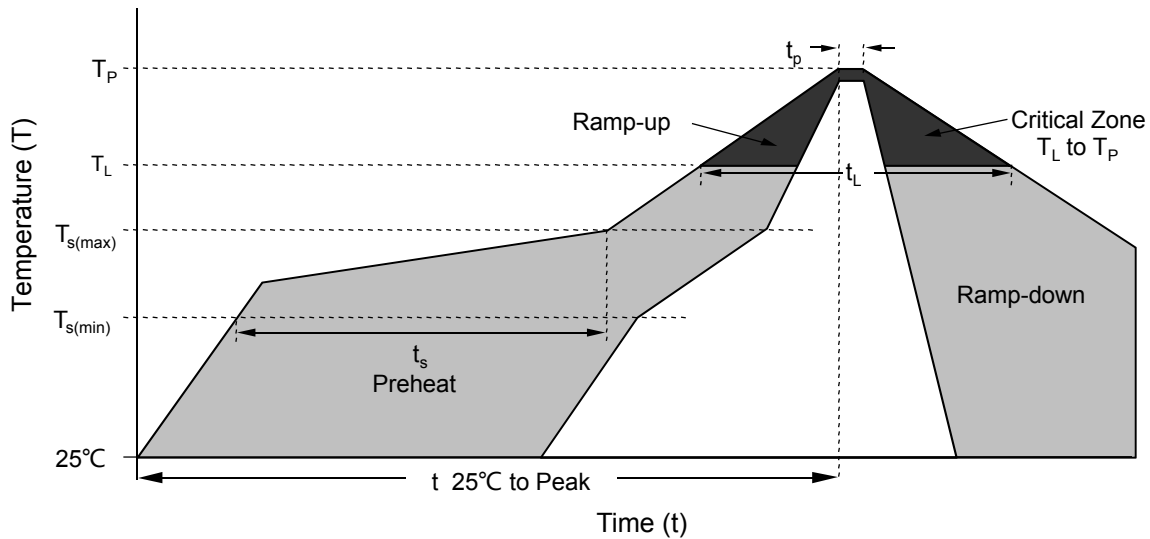
Electrical Characteristics (T_A=25°C unless otherwise noted)

| Part Number (Uni) | Part Number (Bi) | Marking Code | | Reverse Stand off Voltage V _R (V) | Breakdown Voltage V _{BR} @ I _T (V) | | Test Current I _T (mA) | Maximum Clamping Voltage V _C @ I _{PP} (V) | Maximum Peak Pulse Current I _{PP} (A) | Maximum Reverse Leakage I _R @ V _R (μA) |
|-------------------|------------------|--------------|-----|--|--|------|----------------------------------|---|--|--|
| | | Uni | Bi | | Min | Max | | | | |
| SMA6J22A | SMA6J22CA | 6BX | 6XX | 22 | 24.4 | 26.9 | 1 | 35.5 | 16.9 | 1 |
| SMA6J24A | SMA6J24CA | 6BZ | 6XZ | 24 | 26.7 | 29.5 | 1 | 38.9 | 15.5 | 1 |
| SMA6J26A | SMA6J26CA | 6CE | 6YE | 26 | 28.9 | 31.9 | 1 | 42.1 | 14.3 | 1 |
| SMA6J28A | SMA6J28CA | 6CG | 6YG | 28 | 31.1 | 34.4 | 1 | 45.4 | 13.3 | 1 |
| SMA6J30A | SMA6J30CA | 6CK | 6YK | 30 | 33.3 | 36.8 | 1 | 48.4 | 12.4 | 1 |
| SMA6J33A | SMA6J33CA | 6CM | 6YM | 33 | 36.7 | 40.6 | 1 | 53.3 | 11.3 | 1 |
| SMA6J36A | SMA6J36CA | 6CP | 6YP | 36 | 40 | 44.2 | 1 | 58.1 | 10.4 | 1 |
| SMA6J40A | SMA6J40CA | 6CR | 6YR | 40 | 44.4 | 49.1 | 1 | 64.5 | 9.3 | 1 |
| SMA6J43A | SMA6J43CA | 6CT | 6YT | 43 | 47.8 | 52.8 | 1 | 69.4 | 8.7 | 1 |
| SMA6J45A | SMA6J45CA | 6CV | 6YV | 45 | 50 | 55.3 | 1 | 72.7 | 8.3 | 1 |
| SMA6J48A | SMA6J48CA | 6CX | 6YX | 48 | 53.3 | 58.9 | 1 | 77.4 | 7.8 | 1 |
| SMA6J51A | SMA6J51CA | 6CZ | 6YZ | 51 | 56.7 | 62.7 | 1 | 82.4 | 7.3 | 1 |
| SMA6J54A | SMA6J54CA | 6RE | 6ZE | 54 | 60 | 66.3 | 1 | 87.1 | 6.9 | 1 |
| SMA6J58A | SMA6J58CA | 6RG | 6ZG | 58 | 64.4 | 71.2 | 1 | 93.6 | 6.5 | 1 |
| SMA6J60A | SMA6J60CA | 6RK | 6ZK | 60 | 66.7 | 73.7 | 1 | 96.8 | 6.2 | 1 |
| SMA6J64A | SMA6J64CA | 6RM | 6ZM | 64 | 71.1 | 78.6 | 1 | 103 | 5.9 | 1 |
| SMA6J70A | SMA6J70CA | 6RP | 6ZP | 70 | 77.8 | 86 | 1 | 113 | 5.3 | 1 |
| SMA6J75A | SMA6J75CA | 6RR | 6ZR | 75 | 83.3 | 92.1 | 1 | 121 | 5 | 1 |
| SMA6J78A | SMA6J78CA | 6RT | 6ZT | 78 | 86.7 | 95.8 | 1 | 126 | 4.8 | 1 |
| SMA6J85A | SMA6J85CA | 6RV | 6ZV | 85 | 94.4 | 104 | 1 | 137 | 4.4 | 1 |
| SMA6J90A | SMA6J90CA | 6RX | 6ZX | 90 | 100 | 111 | 1 | 146 | 4.1 | 1 |
| SMA6J100A | SMA6J100CA | 6RZ | 6ZZ | 100 | 111 | 123 | 1 | 162 | 3.7 | 1 |
| SMA6J110A | SMA6J110CA | 6SE | 6VE | 110 | 122 | 135 | 1 | 177 | 3.4 | 1 |
| SMA6J120A | SMA6J120CA | 6SG | 6VG | 120 | 133 | 147 | 1 | 193 | 3.1 | 1 |
| SMA6J130A | SMA6J130CA | 6SK | 6VK | 130 | 144 | 159 | 1 | 209 | 2.9 | 1 |
| SMA6J150A | SMA6J150CA | 6SM | 6VM | 150 | 167 | 185 | 1 | 243 | 2.5 | 1 |
| SMA6J160A | SMA6J160CA | 6SP | 6VP | 160 | 178 | 197 | 1 | 259 | 2.3 | 1 |
| SMA6J170A | SMA6J170CA | 6SR | 6VR | 170 | 189 | 209 | 1 | 275 | 2.2 | 1 |
| SMA6J180A | SMA6J180CA | 6ST | 6VT | 180 | 201 | 222 | 1 | 292 | 2.1 | 1 |
| SMA6J200A | SMA6J200CA | 6SV | 6VV | 200 | 224 | 247 | 1 | 324 | 1.9 | 1 |
| SMA6J220A | SMA6J220CA | 6SX | 6VX | 220 | 246 | 272 | 1 | 356 | 1.7 | 1 |
| SMA6J250A | SMA6J250CA | 6SZ | 6VZ | 250 | 279 | 309 | 1 | 405 | 1.5 | 1 |
| SMA6J300A | SMA6J300CA | 6TE | 6UE | 300 | 335 | 371 | 1 | 486 | 1.3 | 1 |
| SMA6J350A | SMA6J350CA | 6TG | 6UG | 350 | 391 | 432 | 1 | 567 | 1.1 | 1 |
| SMA6J400A | SMA6J400CA | 6TK | 6UK | 400 | 447 | 494 | 1 | 648 | 0.9 | 1 |
| SMA6J440A | SMA6J440CA | 6TM | 6UM | 440 | 492 | 543 | 1 | 713 | 0.9 | 1 |

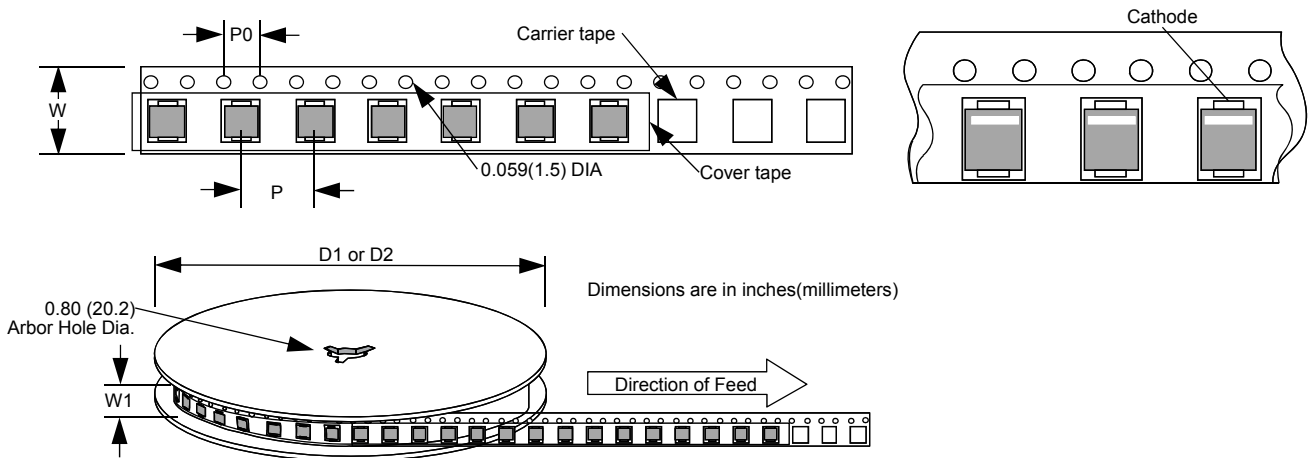

Fig.1 - Peak Pulse Power Rating

Fig.2 - Pulse Derating Curve

Fig.3 - Pulse Waveform

Fig.4 - Typical Junction Capacitance

Fig.5 - Steady State Power Dissipation Derating Curve

**Fig.6 - Maximum Non-Repetitive Peak Forward Surge Current
Uni-Directional Only**



| SMA | | | | | | |
|-----------|--------|-------|-------|-------------|------|-------|
| Dimension | Inches | | | Millimeters | | |
| | MIN | NOM | MAX | MIN | NOM | MAX |
| A | 0.1 | | 0.11 | 2.54 | | 2.8 |
| B | 0.194 | | 0.223 | 4.93 | | 5.66 |
| C | 0.051 | | 0.067 | 1.3 | | 1.7 |
| D | 0.157 | | 0.177 | 3.99 | | 4.5 |
| F | 0.006 | | 0.012 | 0.152 | | 0.305 |
| G | - | | 0.008 | - | | 0.203 |
| H | 0.078 | | 0.095 | 1.98 | | 2.42 |
| L | 0.03 | | 0.06 | 0.76 | | 1.52 |
| X | | 0.085 | | | 2.16 | |
| Y | | 0.07 | | | 1.78 | |
| Z | | 0.079 | | | 2 | |



| Reflow Condition | | Lead-free assembly |
|--|------------------------------------|-------------------------|
| Pre Heat | - Temperature Min ($T_{s(min)}$) | 150°C |
| | - Temperature Max ($T_{s(max)}$) | 200°C |
| | - Time (min to max) (t_s) | 60 – 180 secs |
| Average ramp up rate (Liquidus Temp (T_L) to peak) | | 3°C/second max |
| $T_{s(max)}$ to T_L - Ramp-up Rate | | 3°C/second max |
| Reflow | - Temperature (T_L) (Liquidus) | 217°C |
| | - Time (t_L) | 60 – 150 secs |
| Peak Temperature (T_P) | | 260 ^{+0/-5} °C |
| Time within 5°C of actual peak Temperature (t_p) | | 20 – 40 secs |
| Ramp-down Rate | | 6°C/second max |
| Time 25°C to peak Temperature (t) | | 8 minutes Max. |
| Do not exceed | | 260°C |



| Dimension | Inches | | | Millimeters | | |
|-----------|--------|-------|-----|-------------|-------|-----|
| | MIN | NOM | MAX | MIN | NOM | MAX |
| P | | 0.157 | | | 4 | |
| P0 | | 0.157 | | | 4 | |
| W | | 0.472 | | | 12 | |
| W1 | | 0.492 | | | 12.5 | |
| D1 | | 7 | | | 177.8 | |
| D2 | | 11 | | | 279.4 | |

Disclaimer

Disclaimer

This document is for reference only, data sheet specifications and its information contained are intended to provide a product description only. Yfsemi Microelectronics Stock Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices). Customers using or selling Yfsemi components for use in such applications do so at their own risk and shall agree to fully indemnify Yfsemi and its subsidiaries harmless against all claims, damages and expenditures.

For additional information, please visit our website <http://www.yfsemi.com>