


GLASS PASSIVATED BRIDGE RECTIFIERS

REVERSE VOLTAGE – 800Volts
FORWARD CURRENT – 25 Amperes

- FEATURES**
- Rating to 800V PRV
 - Ideal for printed circuit board
 - Reliable low cost construction utilizing molded plastic Technique
 - UL recognition file # E95060
- MECHANICAL DATA**
- Case: GBU
 - Polarity indicator: As marked on the body
 - Weight: 0.14 ounces, 3.9 grams
 - Component in accordance to RoHs 2002/95/EC
 - Mounting position: Any

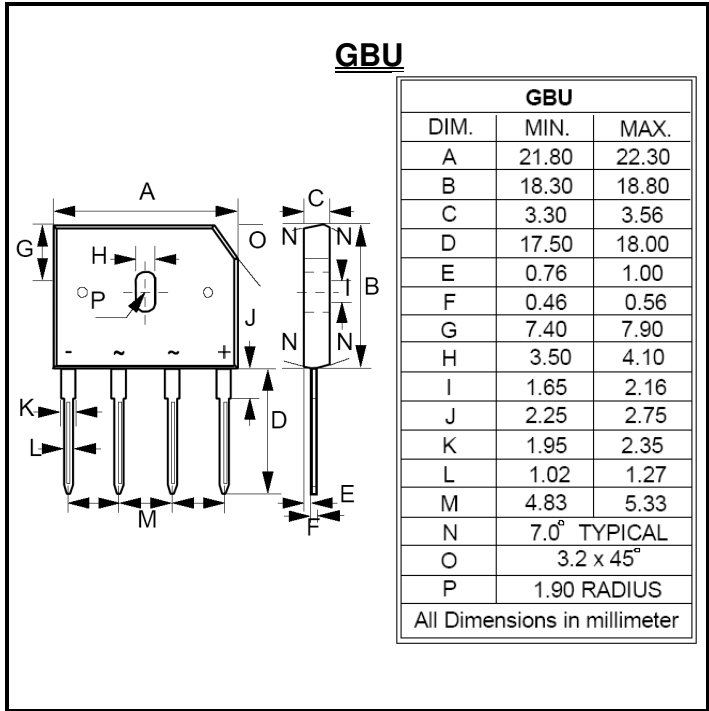

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS
 Ratings at 25°C ambient temperature unless otherwise specified.

PARAMETER	SYMBOL	GBU25KH	UNIT
Device marking code	Note	GBU25KH	---
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	800	V
Average Rectified Output Current	I _{F(AV)}	25 3.6	A
Peak Forward Surge Current	I _{FSM}	350	A
8.3ms single half sine-wave	@ T _J = 25 °C	280	
Peak Forward Surge Current	I _{FSM}	700	A
1.0ms single half sine-wave	@ T _J = 125 °C	560	
I ² t Rating for fusing (t = 8.3ms)	I ² t	325	A ² S
Storage temperature range	T _{STG}	-55 to +150	°C
Operating junction temperature range	T _J	-40 to +175	°C

PARAMETER	TEST CONDITIONS	SYMBOL	Max.	UNIT
Forward Voltage (1)	I _F =12.5A T _J =25°C	V _F	1.05	V
Leakage Current	V _R =800V T _J =25°C	I _R	10	uA
THERMAL CHARACTERISTIC		SYMBOL	Typical	UNIT
Typical Junction Capacitance per element (Note 1)		C _j	93	pF
Typical thermal resistance_Junction to Case (2)		R _{θJC}	1.6	°C/W
Typical thermal resistance_Junction to Lead (3)		R _{θJL}	1.0	°C/W

Note : (1) Measured at 1.0MHz and applied reverse voltage of 4.0V DC
 (2) Thermal Resistance Junction to Case, device mounted on heatsink
 (3) Thermal Resistance Junction to Lead, device mounted on heatsink

FIG.1- FORWARD CURRENT DERATING CURVE

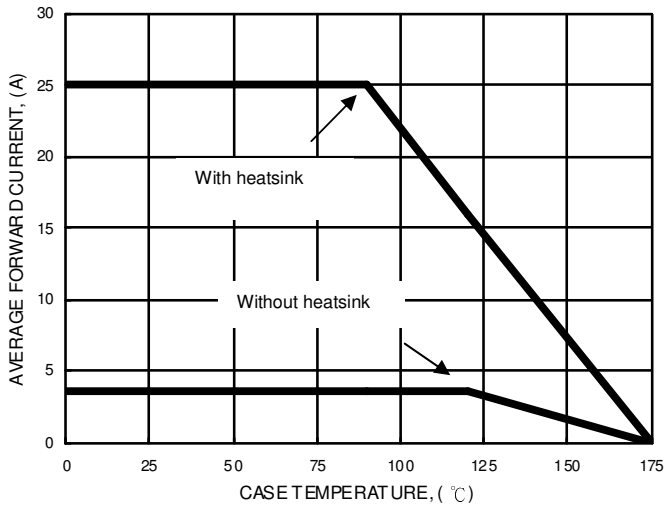


FIG.2- MAXIMUM NON-REPETITIVE SURGE CURRENT

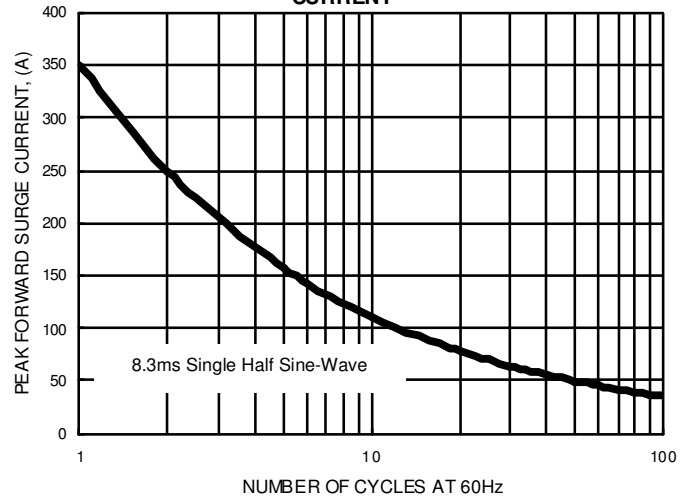


FIG.3- TYPICAL FORWARD CHARACTERISTICS

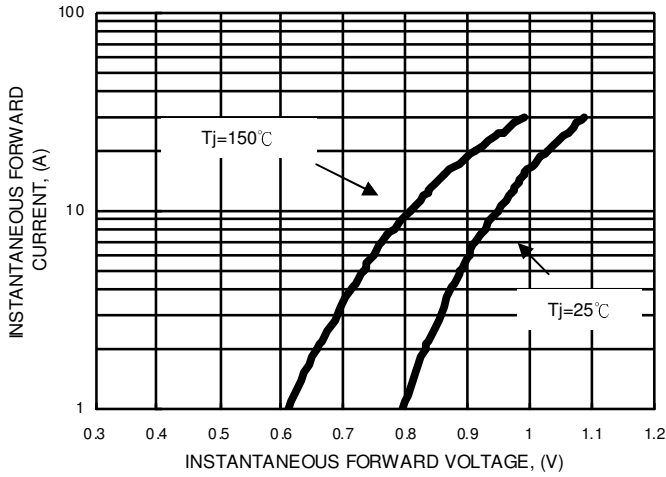


FIG.4- TYPICAL JUNCTION CAPACITANCE


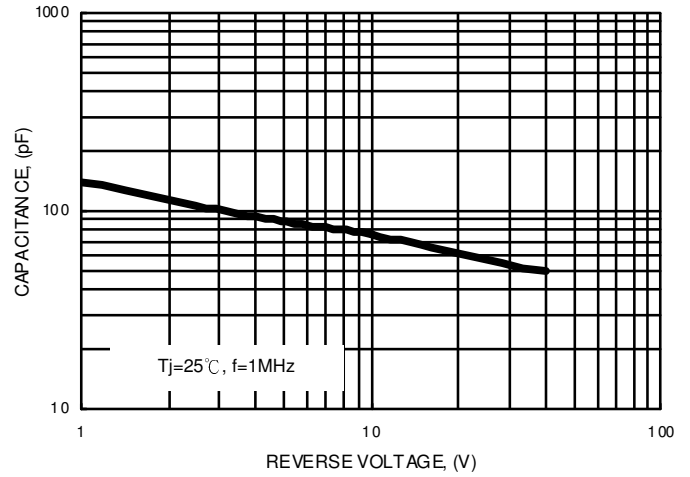


FIG.5- TYPICAL REVERSE CHARACTERISTICS

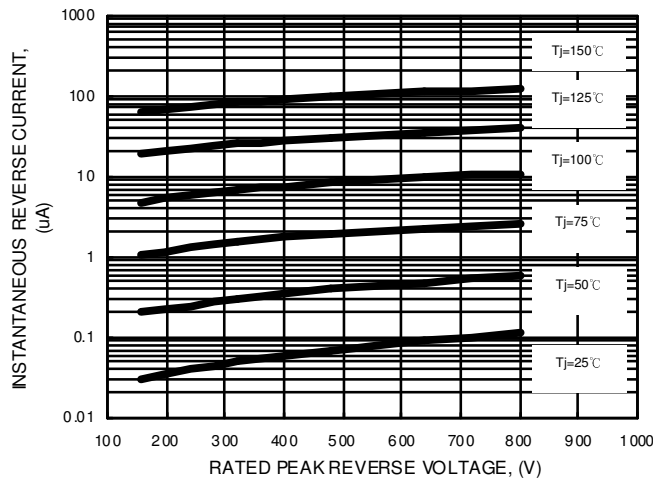

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.