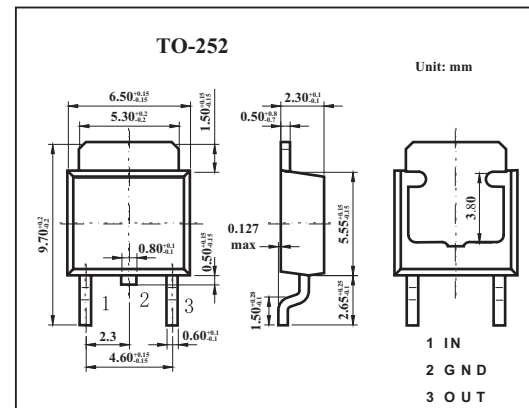


Three-terminal Positive Voltage Regulator

78M08

■ Features

- Maximum output current I_{om} : 0.5 A
- Output voltage V_o : 8V
- Continuous total dissipation P_d : 1.25W

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Input voltage	V_i	35	V
Operating junction temperature range	T_{opr}	-55 to +125	$^\circ\text{C}$
Storage temperature range	T_{stg}	-65 to +150	$^\circ\text{C}$

■ Electrical Characteristics ($V_i=14\text{V}$, $I_o=350\text{mA}$, $0^\circ\text{C}<T_j<125^\circ\text{C}$, $C_i=0.33\ \mu\text{F}$, $C_o=0.1\ \mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Output voltage	V_o	$T_j=25^\circ\text{C}$	7.7	8	8.3	V
		$10.5\leq V_i\leq 23\text{V}$, $I_o=5\text{mA}-350\text{mA}$, $P_o\leq 15\text{W}$	7.6	8	8.4	V
Load regulation	ΔV_o	$T_j=25^\circ\text{C}$, $I_o=5\text{mA}-0.5\text{A}$		20	160	mV
		$T_j=25^\circ\text{C}$, $I_o=5\text{mA}-200\text{mA}$		10	80	mV
Line regulation	ΔV_o	$T_j=25^\circ\text{C}$, $10.5\text{V}\leq V_i\leq 25\text{V}$, $I_o=200\text{mA}$		6	100	mV
		$T_j=25^\circ\text{C}$, $11\text{V}\leq V_i\leq 25\text{V}$, $I_o=200\text{mA}$		2	50	mV
Quiescent current	I_q	$T_j=25^\circ\text{C}$		4.6	6	mA
Quiescent current change	ΔI_q	$10.5\text{V}\leq V_i\leq 25\text{V}$, $I_o=200\text{mA}$			0.8	mA
		$5\text{mA}\leq I_o\leq 350\text{mA}$			0.5	mA
Output noise voltage	V_N	$10\text{Hz}\leq f\leq 100\text{KHz}$		52		μV
Ripple rejection	RR	$11.5\text{V}\leq V_i\leq 21.5\text{V}$, $f=120\text{Hz}$, $I_o=300\text{mA}$	56	80		dB
Dropout voltage	V_d	$T_j=25^\circ\text{C}$, $I_o=350\text{mA}$		2		V
Short circuit current	I_{sc}	$V_i=14\text{V}$, $T_a=25^\circ\text{C}$		250		mA
Peak current	I_{pk}	$T_j=25^\circ\text{C}$		0.7		A

■ Typical Application

