

规格书编号

SPEC NO:

产品规格书

SPECIFICATION

CUSTOMER 客户: _____

PRODUCT 产品: _____ SAW FILTER

MODEL NO 型号: _____ HDF2345U-S6

MARKING 印字: _____ HDF6G33

PREPARED 编制: _____ CHECKED 审核: _____

APPROVED 批准: _____ D A T E 日期: _____ 2013-7-23


客户确认 CUSTOMER RECEIVED:		
审核 CHECKED	批准 APPROVED	日期 DATE

无锡市好达电子有限公司
Shoulder Electronics Limited

更改历史记录 History Record

更改日期 Date	规格书编号 Spec. No.	产品型号 Part No.	客户产品型号 Customer No.	更改内容描述 Modify Content	备注 Remark

1. Package Dimension

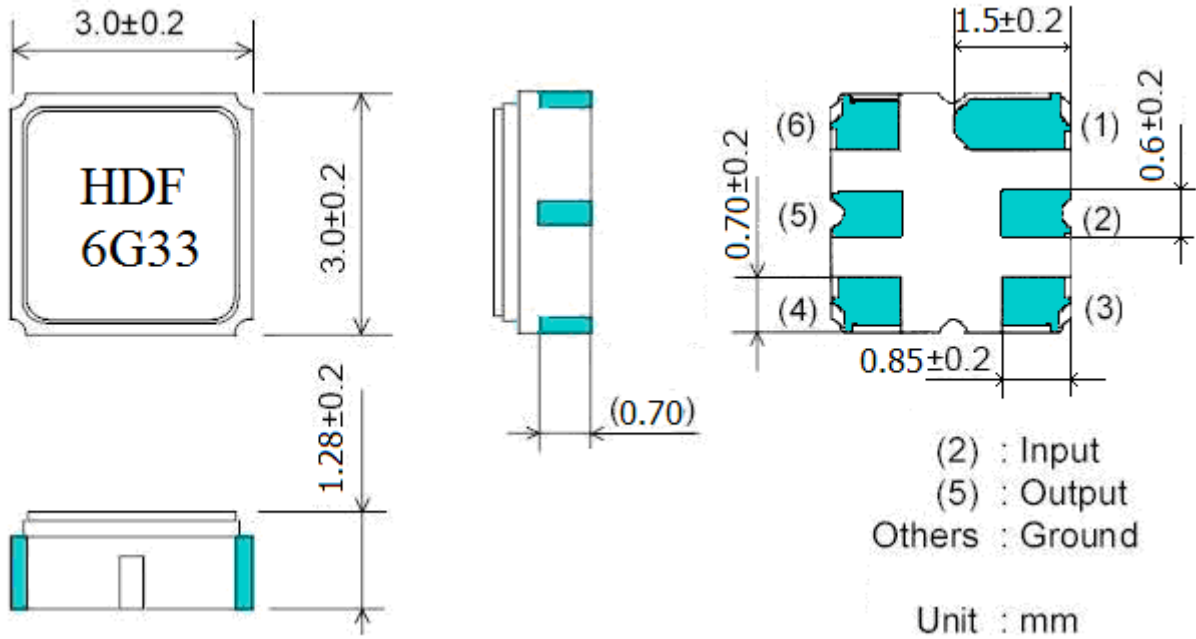




2. Maximum Rating


Operation Temperature Range	-40°C to +85°C
Storage Temperature Range	-40°C to +85°C
Maximum DC Voltage	10 V
Maximum Input Power	10 dBm

3. Performance

	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	-	2345	-
Insertion Loss (2320~2370MHz)	dB		2.8	4.0
Amplitude Ripple (2320~2370MHz)	dB		1.0	2.0
VSWR (2320~2370MHz)			1.8	2.5
Group delay ripple	ns		10	50
Attenuation				
0.3 MHz ~ 2190 MHz	dB	30	35	-
2190 MHz ~ 2290 MHz		8	12	
2400 MHz ~ 2460 MHz		23	30	
2460 MHz ~ 4000 MHz		25	30	
Input/Output Impedance	Ohms		50	

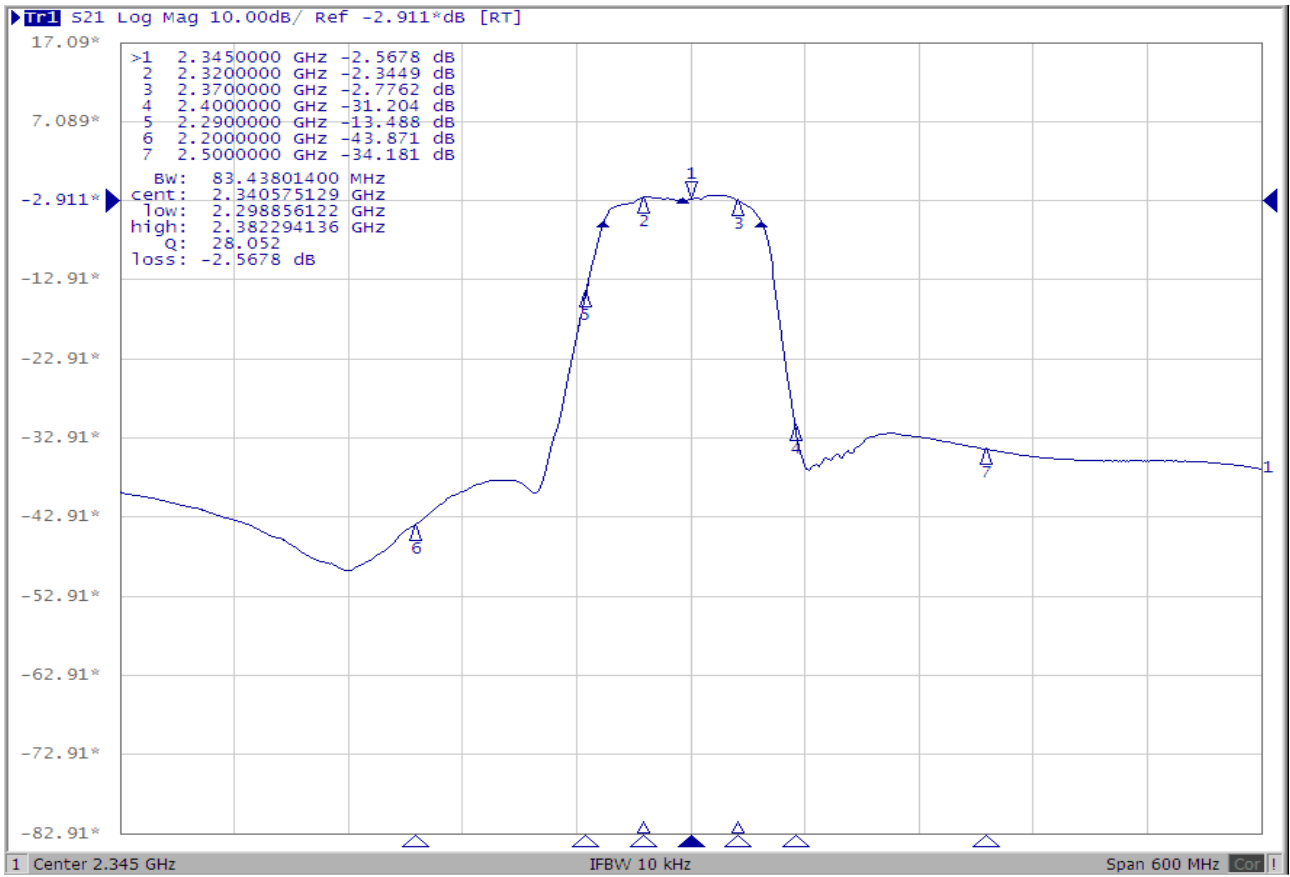

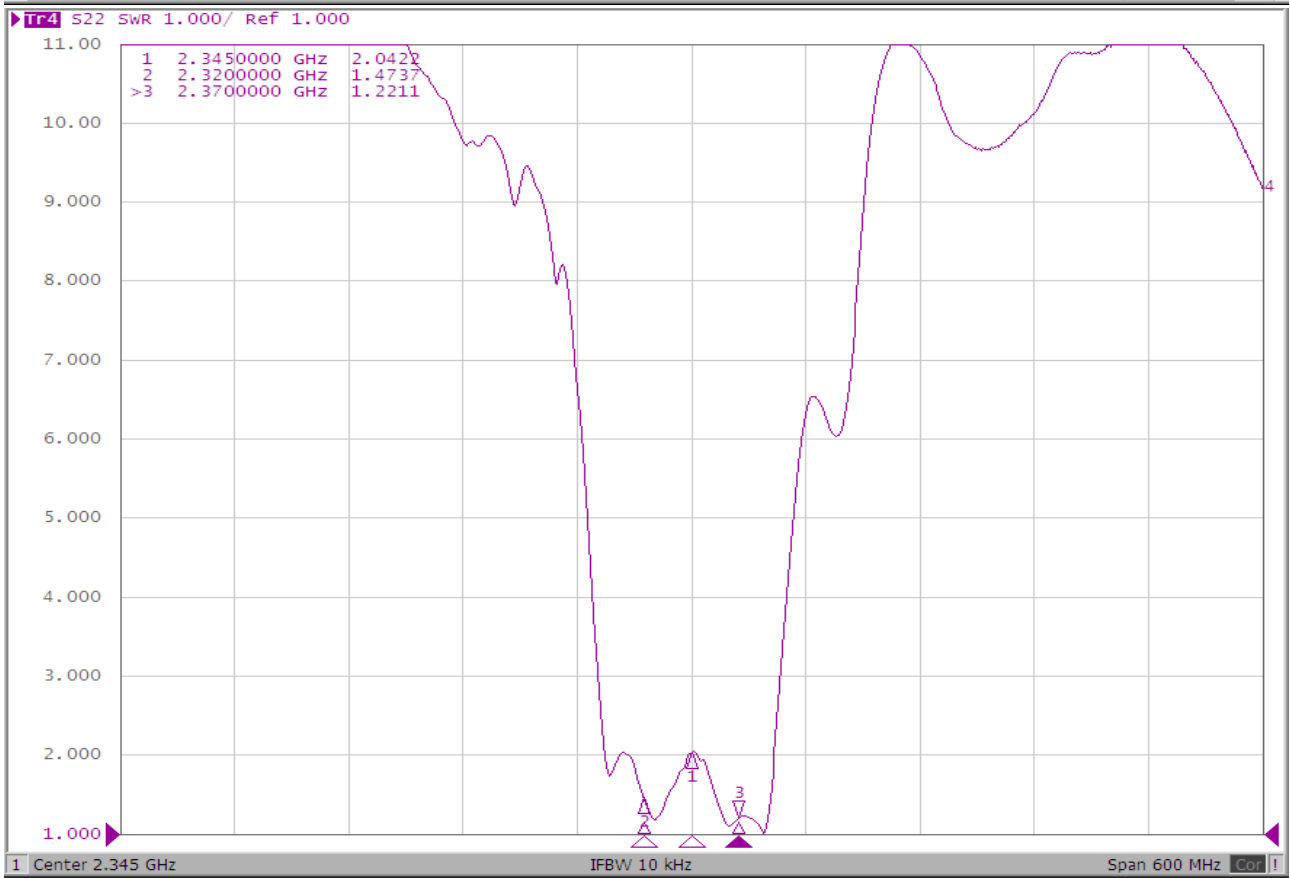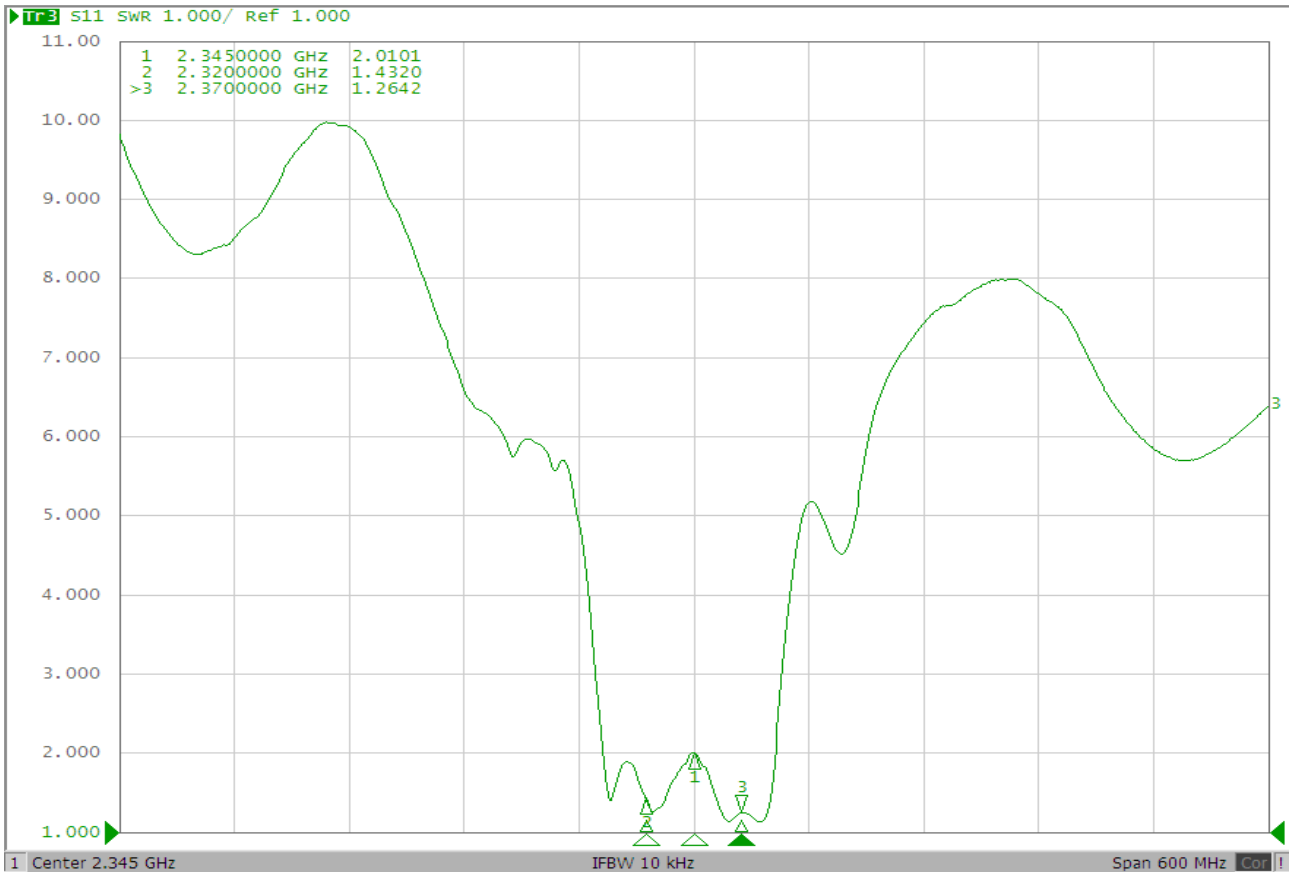

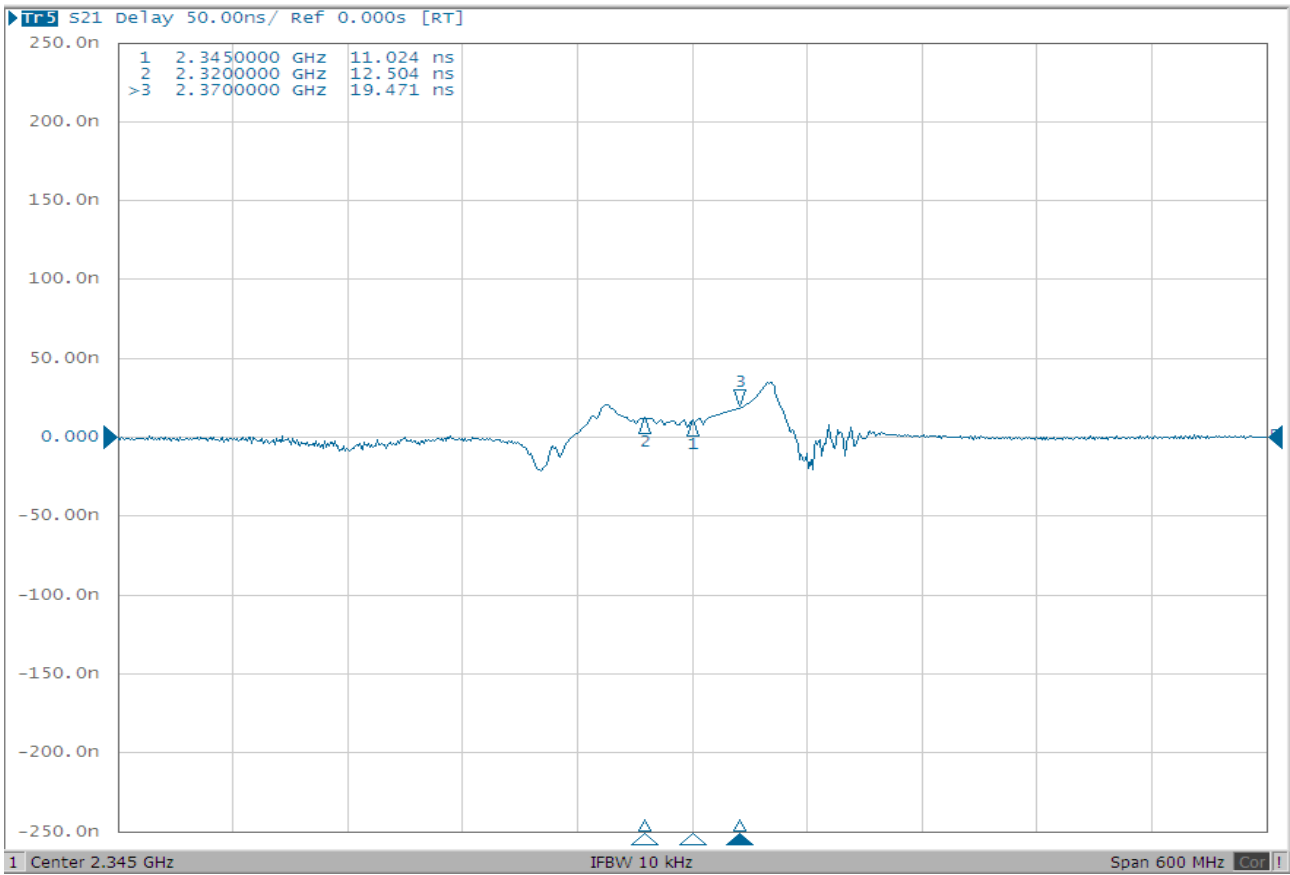

Test Circuit

