


REAL TIME CLOCK MODULE FOR PC/AT *1

RTC-6593

- Built-in crystal unit allows adjustment-free efficient operation.
- Provides 114-bytes of backed-up RAM.
- Extended alarm function.
- Low current consumption.
- A built-in power supply switching circuit makes it possible to provide automatic power supply backup to both the RTC and extended RAM.

*1 PC/AT is a trademark of International Business Machines Corporation.

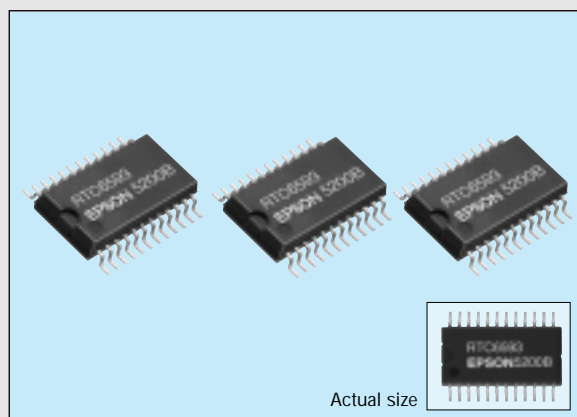


Specifications (characteristics)

Absolute Max. rating

Item	Symbol	Condition	Rating	Unit
Supply voltage	V _{DD}	V _{DD} -GND	- 0.3 to + 7.0	V
Input voltage	V _{IN}	Input pin	- 0.3 to V _{DD} + 0.3	
Storage temperature	T _{STG}	—	- 55 to +125	°C
Soldering conditions	T _{SOL}	Twice under 260°C within 10 seconds or under 230°C within 3 minutes		

External dimensions

(Unit: mm)

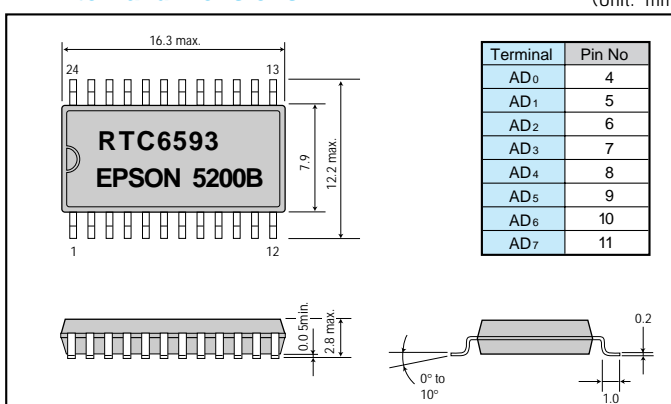

Operating range, frequency and DC characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage	V _{DD}	V _{DD} -GND	4.5	5.0	5.5	V
Operating temperature	T _{OPR}	—	-10		+70	°C
Frequency tolerance	Δf/f ₀	T _a =25°C, V _{DD} =5V			5±20	ppm
Temperature characteristics	T _{OP}	T _a =-10 to 70°C 25°C standard			+10 -120	
Voltage characteristics	f _v	T _a =stable			±6	ppm/V
Aging	f _a	T _a =25°C, V _{DD} =5V First year			±5	ppm/Y
Input voltage	High level	V _{IH}	2.2		V _{DD} +0.3	V
	Low level	V _{IL}	-0.3		0.8	
Output voltage	High level	V _{OH}	2.4			
	Low level	V _{OL}			0.4	
Power supply current	I _{DD}	Output unloaded		3	10	mA
Battery supply current	I _{BAT}	V _{BAT} =3V V _{DD} =0V		0.5	1.0	μA

Terminal functions

Terminal	Function	Pin No.
MOT	Model select (input)	1
AD ₀ to 7	Multiplexed bi-direction address/data buses	4 to 11
GND	Power supply (ground)	12
\overline{RTC}	Real time clock select (input)	13
AS	Address strobe (input)	14
R/ \overline{W}	Read/Write (input)	15
DS	Data strobe (input)	17
\overline{RESET}	Reset (input)	18
\overline{IRQ}	Interrupt request (output)	19
V _{BAT}	Back-up power supply	20
\overline{XIRQ}	Extended alarm interrupt request (output)	21
\overline{XALM}	Extended alarm select (input)	22
SQW	Square wave output	23
V _{DD}	Power supply (+5V)	24
NC	Not connected internally	2,3,16

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.