

GLASS PASSIVATED BRIDGE RECTIFIERS

REVERSE VOLTAGE - **50 to 1000** Volts
FORWARD CURRENT - **15** Amperes


FEATURES

- Rating to 1000V PRV
- High efficiency
- Glass passivated chip junction
- Electrically isolated metal case for maximum heat dissipation
- UL recognized file # E95060


MECHANICAL DATA

- Case : Mounted in the bridge encapsulation
- Polarity : As marked on case
- Mounting : Hole for # 10 screw
- Weight : 0.85 ounces , 24.0 grams (terminal)
: 0.74 ounces , 21.0 grams (wire)

KBPC-GW (Wire)



KBPC-G (Terminal)



| KBPC-G/KBPC-GW | | |
|----------------|-----------------------|-------|
| DIM. | MIN. | MAX. |
| A | 31.80 | - |
| B | 7.90 | 8.40 |
| C | 28.30 | 28.80 |
| D | 17.60 | 18.60 |
| E | 0.97 | 1.07 |
| F | 10.90 | 11.90 |
| G | 17.60 | 18.60 |
| H | 13.80 | 14.80 |
| I | 16.10 | 17.10 |
| J | 16.10 | 17.10 |
| K | 18.80 | 21.30 |
| L | 0.76 | 0.86 |
| M | 6.30 | 6.50 |
| N | HOLE FOR NO. 10 SCREW | |
| | 5.08 | 5.59 |

All Dimensions in millimeter

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| CHARACTERISTICS | SYMBOL | KBPC15 005G/W | KBPC15 01G/W | KBPC15 02G/W | KBPC15 04G/W | KBPC15 06G/W | KBPC15 08G/W | KBPC15 10G/W | UNIT |
|-----------------------------------------------------------------------------------------|------------------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|------------------|
| Maximum Recurrent Peak Reverse Voltage | VRRM | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS Voltage | VRMS | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC Blocking Voltage | VDC | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum Average Forward Rectified Current @Tc = Ta | I(AV) | 15.0 | | | | | | | A |
| Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load | IFSM | 300 | | | | | | | A |
| Maximum forward Voltage at 7.5A DC | VF | 1.1 | | | | | | | V |
| Maximum DC Reverse Current at Rated DC Blocking Voltage @Tj = 25°C @Tj = 125°C | IR | 5.0 500 | | | | | | | uA |
| I ² t Rating for fusing (t < 8.3ms), (Note 1) | I ² t | 374 | | | | | | | A ² S |
| Typical Junction Capacitance per element (Note 2) | CJ | 300 | | | | | | | pF |
| Typical Thermal Resistance (Note 3) | RθJC | 3.0 | | | | | | | °C/W |
| Operating Temperature Range | TJ | -55 to +150 | | | | | | | °C |
| Storage Temperature Range | TSTG | -55 to +150 | | | | | | | °C |

NOTES : 1.Measured at non-repetitive, for greater than 1ms and less than 8.3ms
2.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
3.Device mounted on 300mm x 300mm x 1.6mm Cu Plate Heatsink.

REV. 4, Sep-2010, KBDI01

FIG.1 - FORWARD CURRENT DERATING CURVE

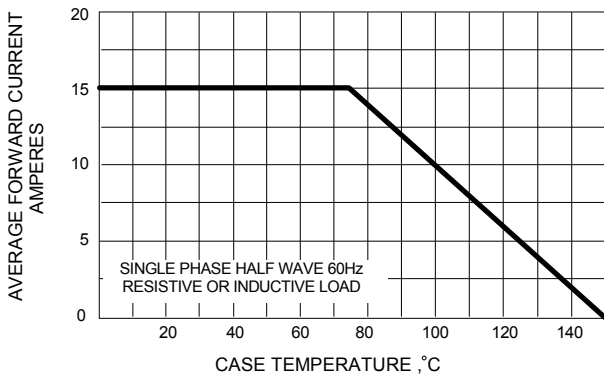


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

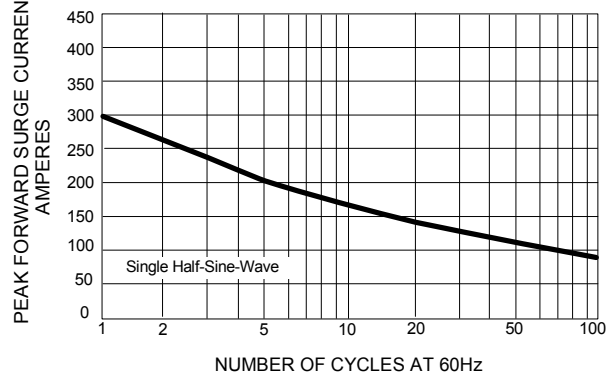


FIG.3 - TYPICAL JUNCTION CAPACITANCE

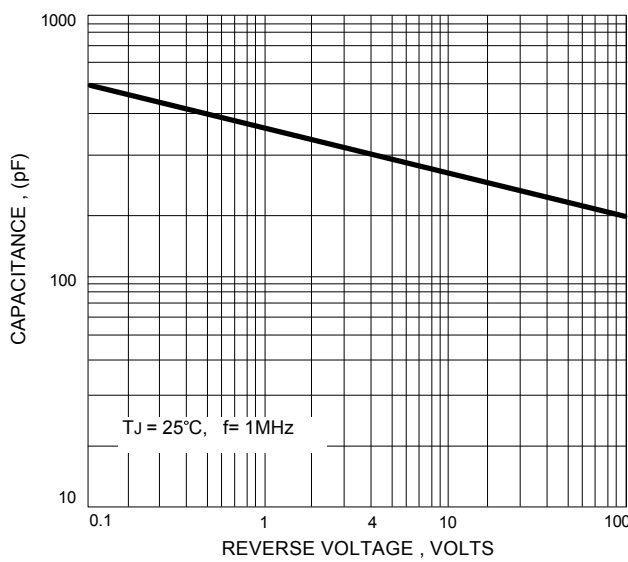


FIG.4 - TYPICAL FORWARD CHARACTERISTICS


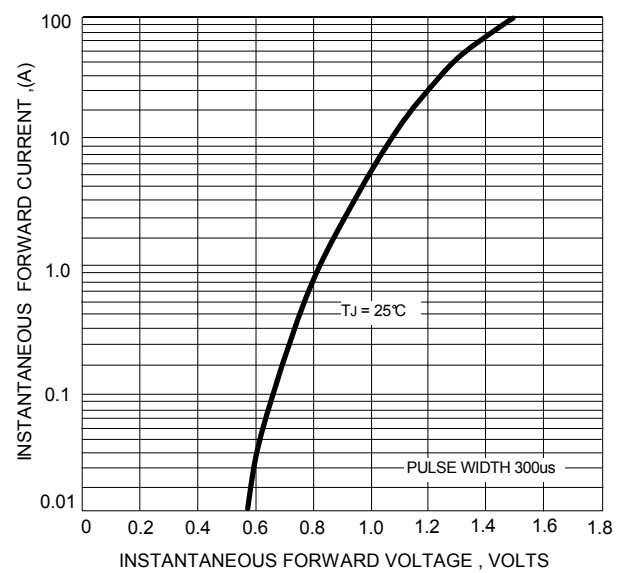


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

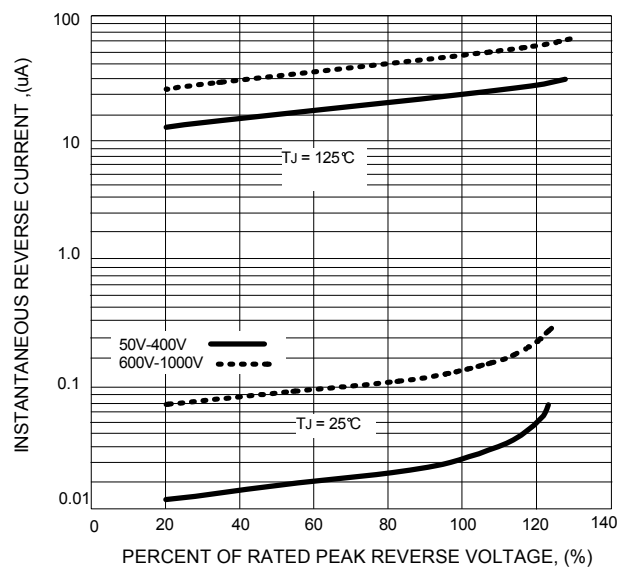

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.