

Features

- Low turn-on voltage.
- Fast switching.
- Ultra-small surface mount package.
- PN Junction Guard Ring for Transient and ESD Protection.


HF

Typical Applications


- For general purpose switching applications.

Mechanical Data


- Case: SOT-323
- Terminals: solderable per MIL-STD-202, Method 208.




BAS40W




BAS40W-04



BAS40W-05



BAS40W-06



SOT-323

Ordering Information

Part Number	Package	Shipping	Marking Code
BAS40W	SOT-323	3000 pcs / Tape & Reel	43
BAS40W-04	SOT-323	3000 pcs / Tape & Reel	44
BAS40W-05	SOT-323	3000 pcs / Tape & Reel	45
BAS40W-06	SOT-323	3000 pcs / Tape & Reel	46

Maximum Ratings (@T_A=25°C unless otherwise specified)

Parameter	Symbol	Limits	Unit
Peak Repetitive Peak reverse voltage	V _{RRM}	40	V
Working Peak Reverse Voltage	V _{RWM}		
DC Reverse Voltage	V _R		
RMS Reverse voltage	V _{R(RMS)}	28	V
Forward Continuous Current	I _{FM}	200	mA
Non-Repetitive peak forward surge Current@8.3ms	I _{FSM}	600	mA
Power Dissipation *	P _D	200	mW

* part mounted on FR-4 board with recommended pad layout

Thermal Characteristics


Parameter	Symbol	Limits	Unit
Thermal Resistance, Junction to Ambient Air	$R_{\theta JA}$	500	$^{\circ}C/W$
Operating Junction Temperature Range	T_j	-55 to +125	$^{\circ}C$
Storage Temperature Range	T_{STG}	-55 to +150	$^{\circ}C$

Electrical Characteristics (@ $T_A=25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward Voltage *1	V_F	$I_F=1mA$			0.38	V
		$I_F=40mA$			1	V
Reverse Leakage Current *2	I_R	$V_R=30V$			200	nA
Capacitance Between Terminals	C_T	$V_R=0V, f=1MHz$		2.5	5	pF
Reverse Recovery Time	t_{rr}	$I_F=I_R=10mA$ $I_{rr}=1.0mA, R_L=100\Omega$			5	ns


*1: pulse test, $t_p \leq 300\mu s$
*2: pulse test, $t_p \leq 5ms$

Ratings and Characteristic Curves ($T_A=25^{\circ}C$ unless otherwise noted)

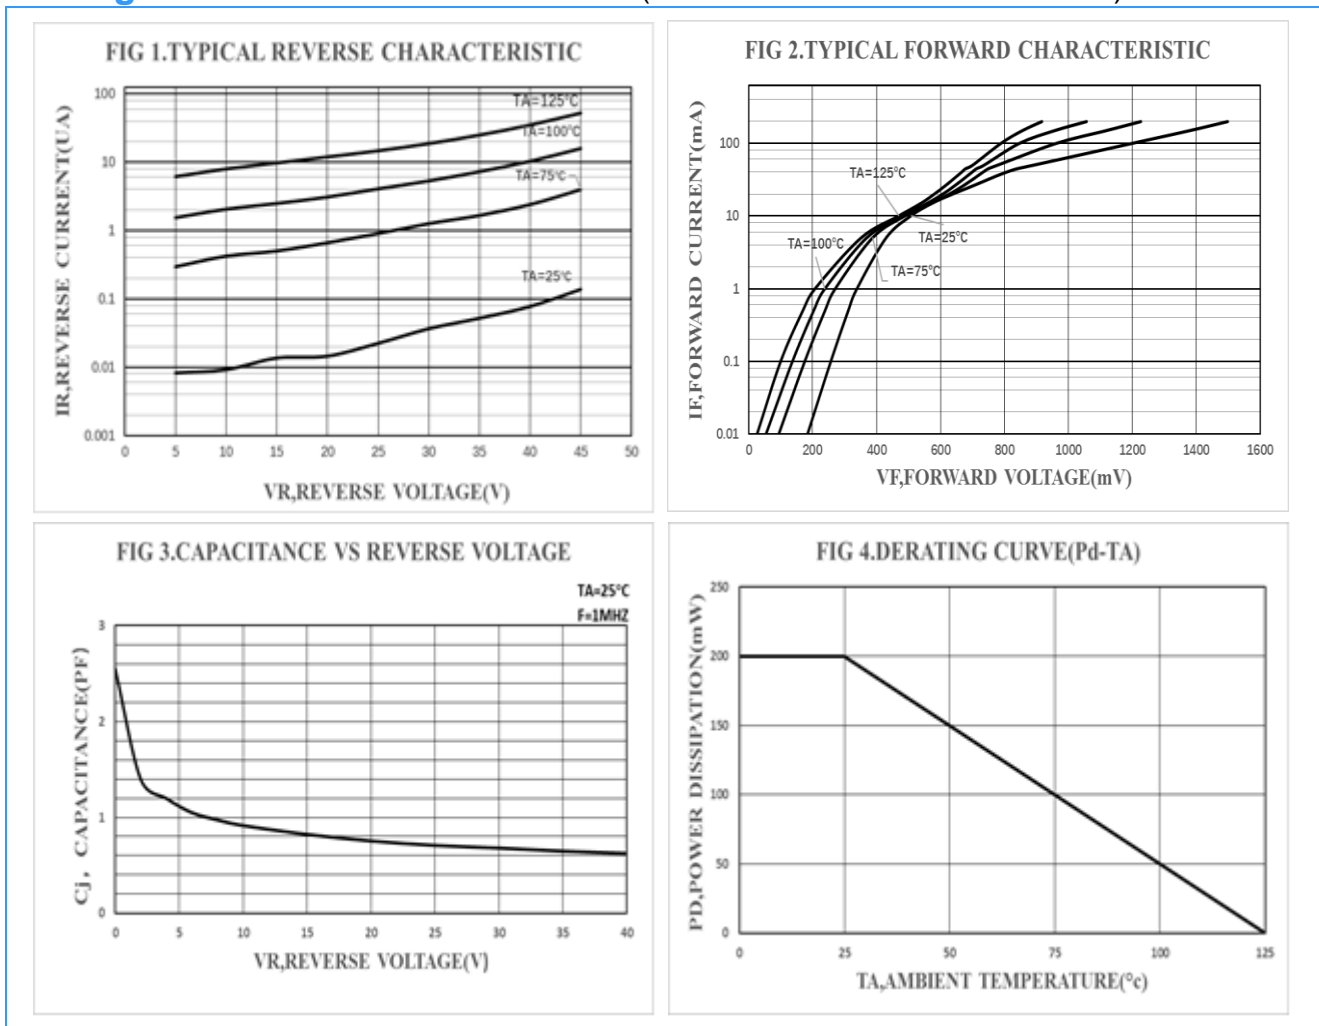

Package Outline Dimensions (unit: mm)


SOT-323

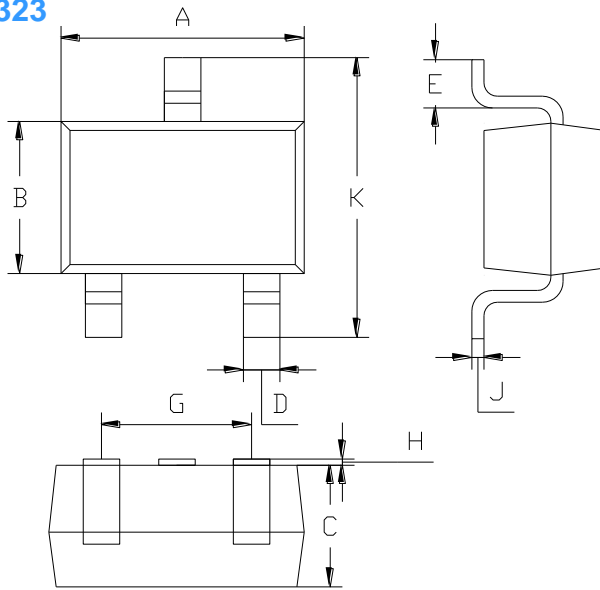

SOT-323		
Dim	Min	Max
A	2.00	2.20
B	1.15	1.35
C	0.90	1.10
D	0.15	0.35
E	0.25	0.40
G	1.20	1.40
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Mounting Pad Layout (unit: mm)

SOT-323

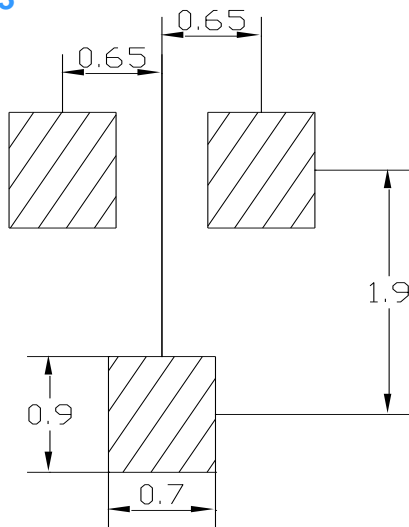

IMPORTANT NOTICE

Galaxy Microelectronics (GME) reserves the right to make changes without further notice to any product herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.