


Features

- Fast switching speed
- High conductance

HF

Mechanical Data

- Case: SOT-363
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

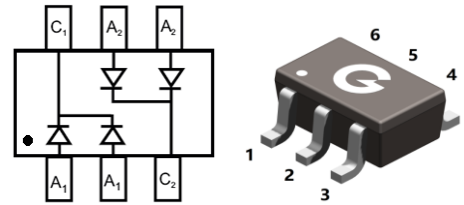

SOT-363

Ordering Information

| Part Number | Package | Shipping Quantity | Marking Code |
|-------------|---------|------------------------|--------------|
| BAV70DW | SOT-363 | 3000 pcs / Tape & Reel | KJA |

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

| Parameter | Symbol | Value | Unit |
|--|---------------------|-------|------|
| Non-Repetitive Peak Reverse Voltage | V _{RM} | 100 | V |
| Peak Repetitive Peak Reverse Voltage | V _{RRM} | 75 | V |
| Working Peak Reverse Voltage | V _{RWM} | 75 | V |
| DC Blocking Voltage | V _R | 75 | V |
| RMS Reverse Voltage | V _{R(RMS)} | 53 | V |
| Average Rectified Output Current | I _o | 150 | mA |
| Non-repetitive peak forward surge current, 1μs | I _{FSM} | 2 | A |
| Non-repetitive peak forward surge current, 1s | I _{FSM} | 1 | A |

Thermal Characteristics

| Parameter | Symbol | Value | Unit |
|--------------------------------------|------------------|------------|------|
| Power Dissipation | P _D | 200 | mW |
| Thermal Resistance Junction-to-Air | R _{θJA} | 625 | °C/W |
| Operating Junction Temperature Range | T _J | -65 ~ +150 | °C |
| Storage Temperature Range | T _{STG} | -65 ~ +150 | °C |

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Test Condition | Min. | Typ. | Max. | Unit |
|------------------------------|-------------|---|------|------|-------|---------------|
| Reverse Breakdown Voltage | $V_{(BR)R}$ | $I_R = 100\mu\text{A}$ | 75 | - | - | V |
| Forward Voltage | V_F | $I_F = 1\text{mA}$ | - | - | 0.715 | V |
| | | $I_F = 10\text{mA}$ | - | - | 0.855 | V |
| | | $I_F = 50\text{mA}$ | - | - | 1.000 | V |
| | | $I_F = 150\text{mA}$ | - | - | 1.250 | V |
| Maximum Peak Reverse Current | I_R | $V_R = 20\text{V}, T_J = 25^\circ\text{C}$ | - | - | 25 | nA |
| | | $V_R = 75\text{V}$ | - | - | 2.5 | μA |
| | | $V_R = 25\text{V}, T_J = 150^\circ\text{C}$ | - | - | 30 | μA |
| | | $V_R = 75\text{V}, T_J = 150^\circ\text{C}$ | - | - | 50 | μA |
| Total Capacitance | C_J | $V_R = 0\text{V}, f = 1.0\text{MHz}$ | - | - | 2 | pF |
| Reverse Recovery Time | t_{rr} | $I_F = I_R = 10\text{mA}$ $I_{rr} = 0.1 \times I_R, R_L = 100\Omega$ | - | - | 4 | ns |

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

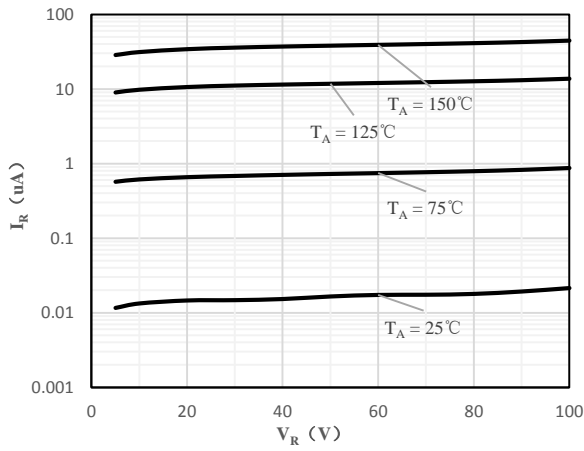


Fig 1 Typical Reverse Characteristic

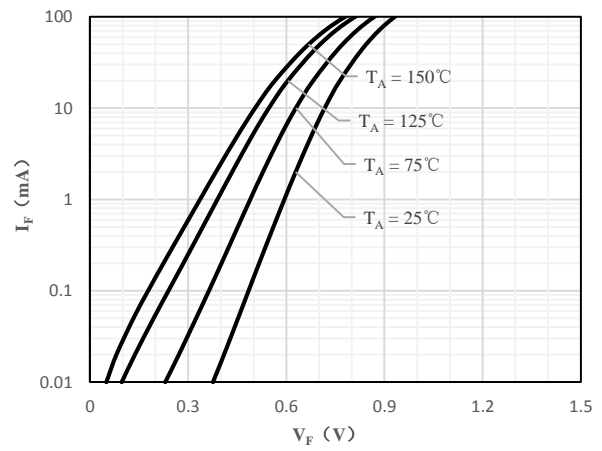


Fig 2 Typical Forward Characteristics

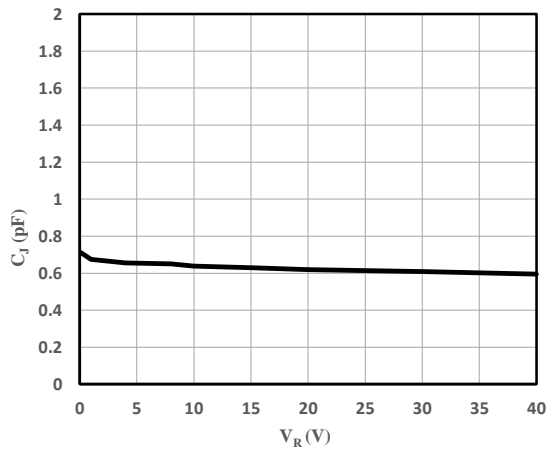


Fig 3 Capacitance vs. Reverse Voltage



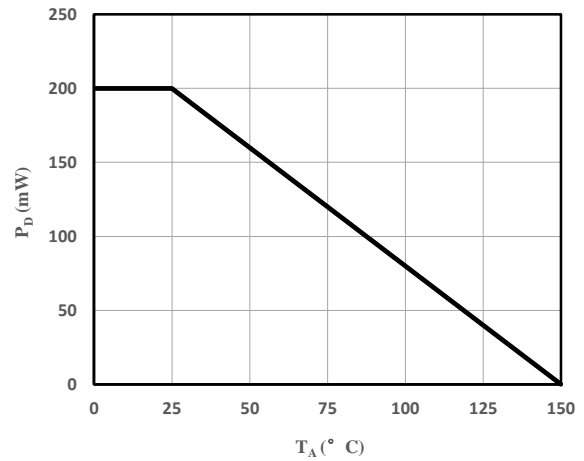


Fig 4 Power Derating Curve

Package Outline Dimensions (Unit: mm)

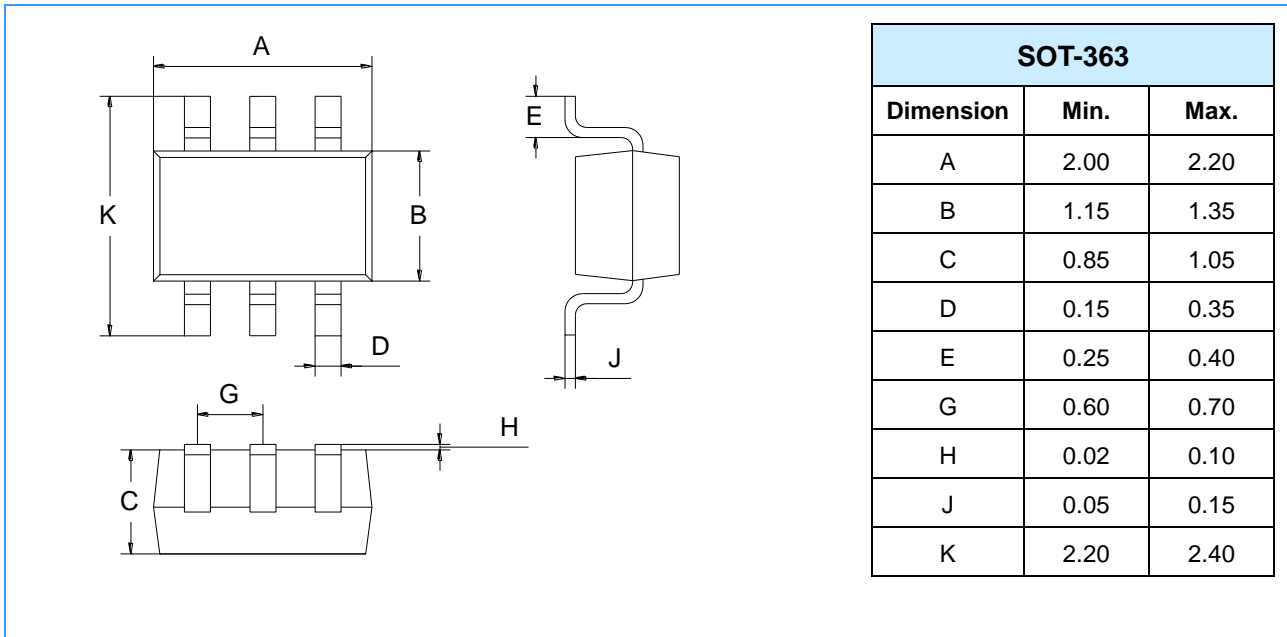

Mounting Pad Layout (Unit: mm)

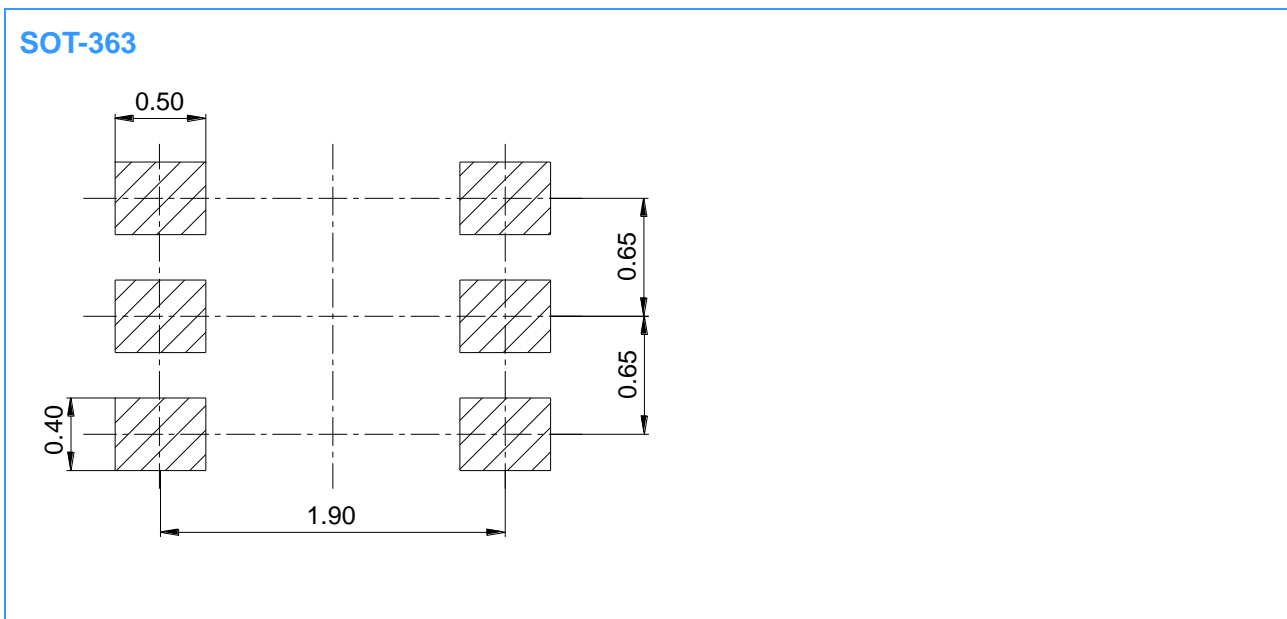

Important Notice

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.