

# SEI(G)

10.1 x 3.1 x 3.1 mm (4012)



## Agency Approvals

Agency	Ampere Rating
Recognized Component for Canada and US	500mA - 5A
TUV	500mA - 5A
KTL	500mA - 5A
CQC	500mA - 3A 4A - 5A

## Interrupting Rating

50 amperes at 250V AC


## Product Characteristics

<b>Operating Temperature</b>	-55 °C to 125 °C
<b>Material</b>	Body: Ceramic Termination: Gold Plated Brass Caps

## Packaging

Packaging Option	Quantity
On Tape	2,500 pcs / reel

## Mechanical Dimensions (mm)

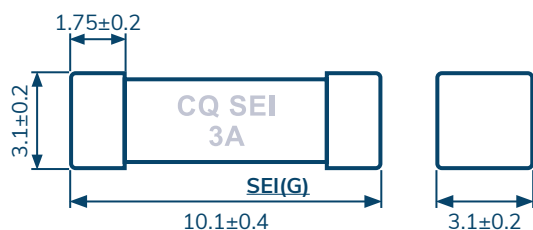

RoHS



## Electrical Characteristics

Ampere Rating	Opening Time	
	1 In	2.5 In
	MIN	MAX
500mA - 5A	4 hr	120 sec

Catalog Number	Ampere Rating (A)	Voltage Rating (V)	Nominal Cold Resistance (Ohms)	Nominal Melting I <sup>2</sup> t (A <sup>2</sup> sec.)
SEI .500	500mA	250V	0.5479	1.963
SEI .750	750mA		0.2600	3.375
SEI 001	1A		0.1800	11.22
SEI 1.50	1.5A		0.1027	14.85
SEI 002	2A		0.0504	19.84
SEI 2.50	2.5A		0.0370	20.50
SEI 003	3A		0.0280	54.00
SEI 3.50	3.5A		0.0199	57.82
SEI 004	4A		0.0158	125.6
SEI 005	5A		0.0120	185.0