

# KX023 Accelerometer

3x3x0.9mm Accelerometer with FIFO/FILO Buffer



## FEATURES

- 3x3x0.9mm LGA package
- Full-featured algorithm engine including:
  - Tap detection, orientation detection, activity monitoring, and embedded motion wake-up algorithms
- Low current consumption in all modes:
  - 0.9  $\mu$ A in standby,
  - 10  $\mu$ A at normal resolution, and
  - 145  $\mu$ A at high resolution
- Two interrupt registers
- User-configurable, embedded wake-up function to conserve battery power
- Internal voltage regulator to maintain constant internal operating voltages throughout the 1.8 - 3.6V input supply range

## APPLICATIONS

- User Interface
- Power Management
- Active/Inactive Monitoring
- Device Orientation
- Inclination and Tilt Sensing
- Gesture Recognition
- Pedometer/Activity Monitoring
- Motion-controlled user interface


## FOR

- Smartphones and Mobile Devices
- Laptops
- Gaming and Virtual Reality
- Health and Fitness

## PRODUCT OVERVIEW

The KX023 accelerometer delivers unparalleled flexibility, enabling you to optimize power and noise performance to meet your product design needs. By simply selecting the output data rate (ODR) and amount of oversampling for data averaging you can tune power and noise performance to meet the needs of your specific application.

In addition, the 3-axis KX023 offers I2C/SPI output and an integrated FIFO/FILO buffer that features a wide range of embedded functionality, including tap detection, orientation, activity, and wake-up algorithms. Kionix's XAC sensor provides outstanding stability with a market-leading combination of improved shock, reflow, and thermal performance.

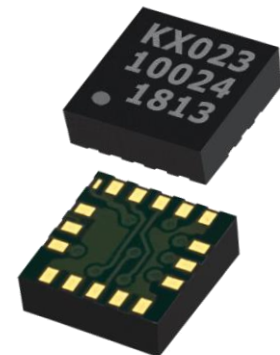

# KX023 Accelerometer

## 3x3x0.9mm Accelerometer with FIFO/FILO Buffer



The performance parameters below are programmed and tested at 2.6 volts and T = 25°C. The device can accept supply voltages from 1.8V to 3.6V. Due to internal voltage regulators, there should be minimal change with supply voltage variations.

### PERFORMANCE SPECIFICATIONS

PARAMETERS	UNITS	KX023-1025	CONDITION
Range	g	±2.0, ±4.0, ±8.0	User-selectable full-scale output range
Sensitivity <sup>1</sup>	counts/g	16384, 8192, 4096	16-bit
		64, 32, 16	8-bit
0g Offset vs. Temp	mg/°C	0.2	-40°C to +85°C
Sensitivity vs. Temp	%/°C	0.01	-40°C to +85°C
Mechanical Resonance <sup>2</sup>	Hz	3500 (xy) 1800 (z) typical	-3dB
Output Data Rate (ODR) <sup>3</sup>	Hz	0.781 min; 50 typical; 1600 max	
Non-Linearity	% of FS	0.6 typical	% of full scale output
Cross-axis Sensitivity	%	2.0 typical	
Noise <sup>4</sup>	mg	0.75 typical	
I <sup>2</sup> C Communication Rate	MHz	3.4 max	
SPI Communication Rate	MHz	10 max	
Power Supply	V	1.8V – 3.6V typical	
Current Consumption <sup>5</sup>	µA	145 typical	High resolution (RES = 1)
		10 typical	Low resolution (RES = 0)
		0.9 typical	Standby

### ENVIRONMENTAL SPECIFICATIONS

PARAMETERS	UNITS	KX023-1025	CONDITION
Operating Temperature	°C	-40 to 85	Powered
Storage Temperature	°C	-55 to 150	Un-powered
Mechanical Shock	g	5,000, 0.5 ms 10,000, 0.2 ms	Powered or un-powered, halversine
ESD	V	2,000	Human body model

### NOTES

- <sup>1</sup> Resolution and acceleration ranges are user selectable via I<sup>2</sup>C or SPI.
- <sup>2</sup> Resonance as defined by the dampened mechanical sensor.
- <sup>3</sup> User selectable through I<sup>2</sup>C or SPI.
- <sup>4</sup> RMS at 50Hz with low-pass filter = ODR/9
- <sup>5</sup> Current varies with Output Data Rate (ODR).