

Surface Mount Glass Passivated Bridge Rectifiers

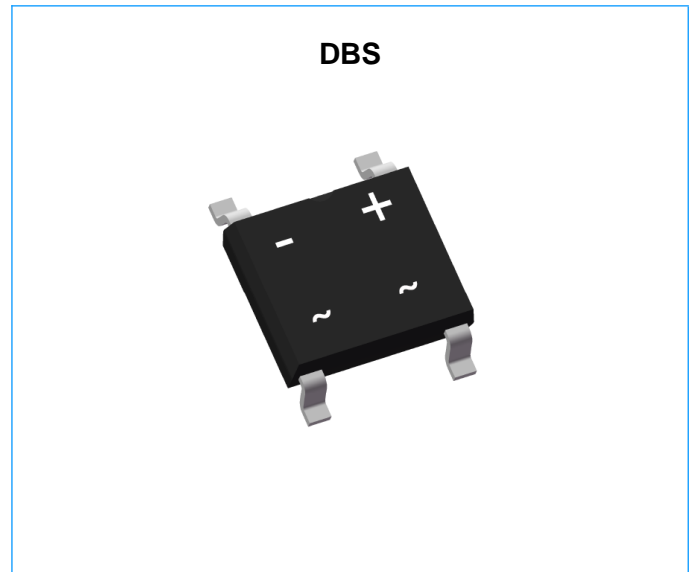
DB201S~DB207S
50 to 1000 V
2.0A
DBS

Features

- u Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- u Glass passivated junction chip
- u Rating to 1000V PRV
- u Ideal for printed circuit board
- u High temperature soldering guaranteed: 260 °C /10 seconds at terminals
- u Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

Mechanical Data

- u Case: DBS molded plastic body
- u Epoxy: UL94V-0 rate flame retardant
- u Terminals: Plated leads solderable per MIL-STD-750, Method 2026
- u Mounting Position: Any
- u Weight : 0.02 ounce, 0.38 grams



Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbol	DB201S	DB202S	DB203S	DB204S	DB205S	DB206S	DB207S	Unit	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current	$I_{(AV)}$	2.0							A	
Peak Forward Surge Current 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	60							A	
Maximum Instantaneous Forward Voltage at 1.0 A DC	V_F	1.1							V	
Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_A=25^{\circ}C$	I_R							10	μA
	$T_A=125^{\circ}C$									
Typical Junction Capacitance (Note 1)	C_J	25							pF	
Typical Thermal Resistance (Note 2)	$R_{\theta JA}$	40							K/W	
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150							°C	





Notes: 1. Measured at 1MHz and applied reverse voltage of 4.0V.

2. Thermal resistance junction to ambient mounted on P.C.B with 0.5*0.5 inches (1.3*1.3mm) copper pads.

Surface Mount Glass Passivated Bridge Rectifiers

DB201S~DB207S
50 to 1000 V
2.0A
DBS

Rating and Characteristic Curves

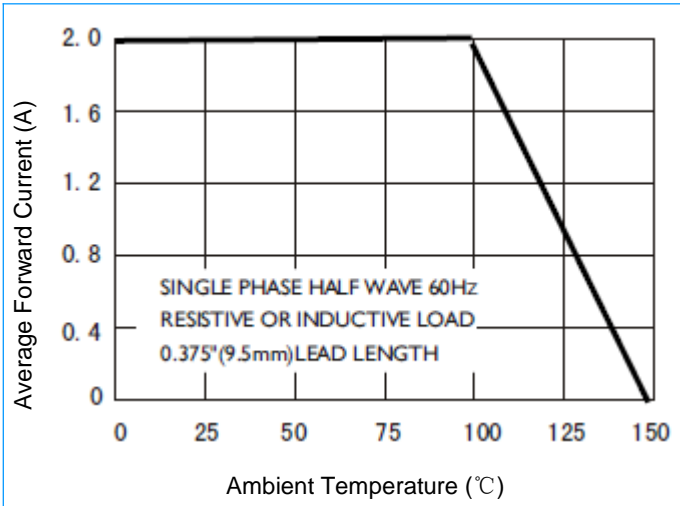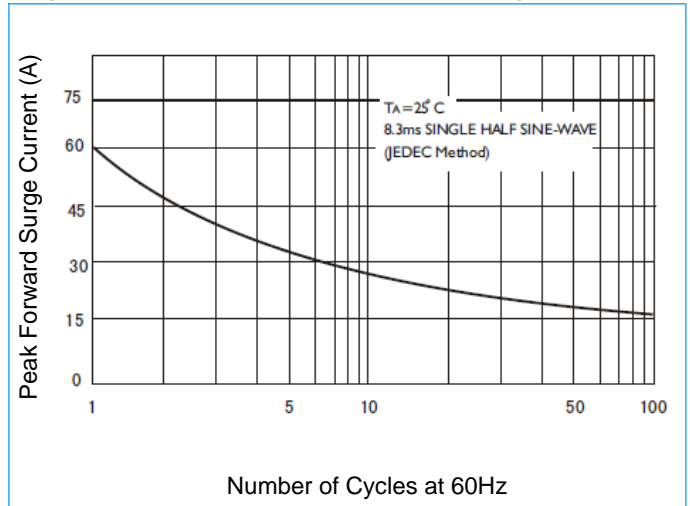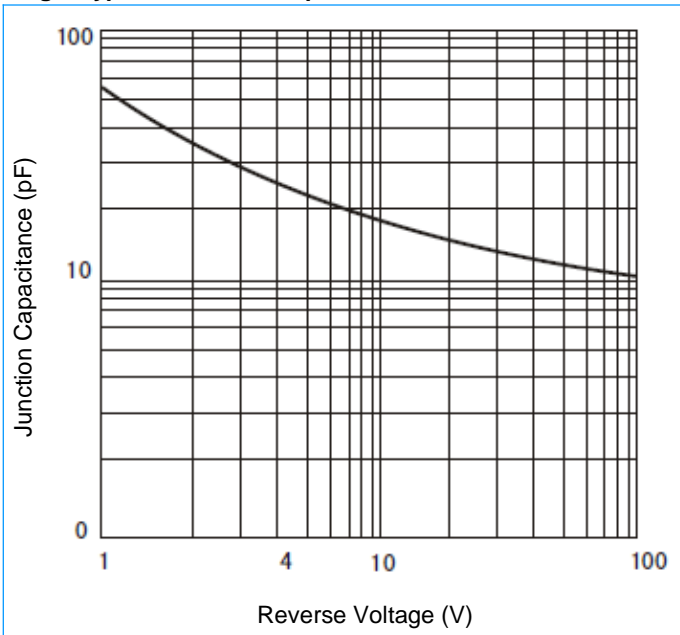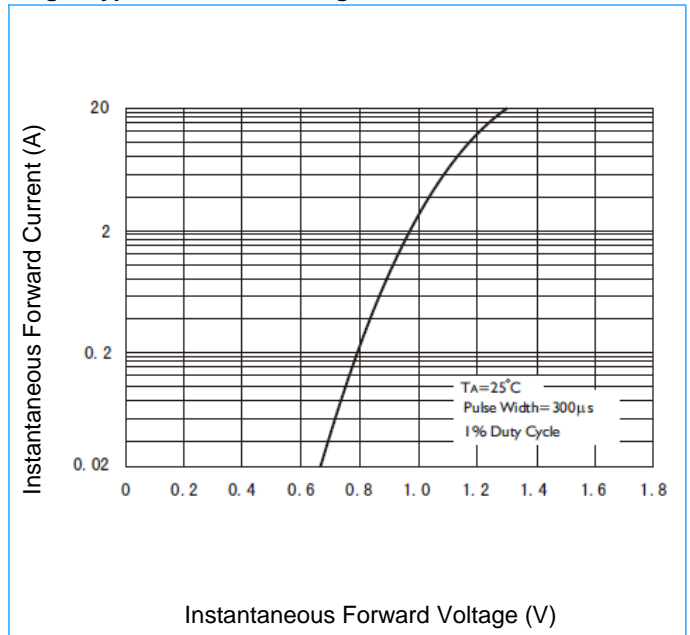Fig1. Typical Forward Current Derating Curve

Fig2. Maximum Non-repetitive Forward Surge Current

Fig3. Typical Junction Capacitance

Fig4. Typical Forward Voltage Characteristics


Surface Mount Glass Passivated Bridge Rectifiers

DB201S~DB207S


50 to 1000 V

2.0A


DBS

Rating and Characteristic Curves (Continue)

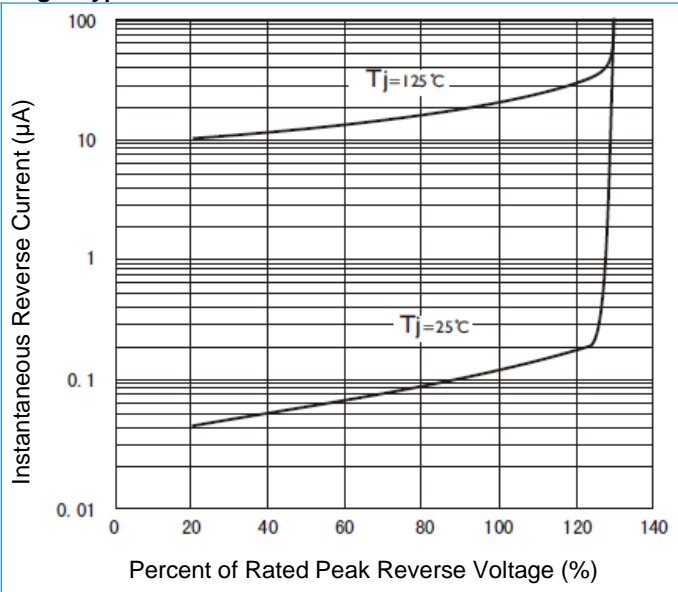Fig5. Typical Reverse Characteristics



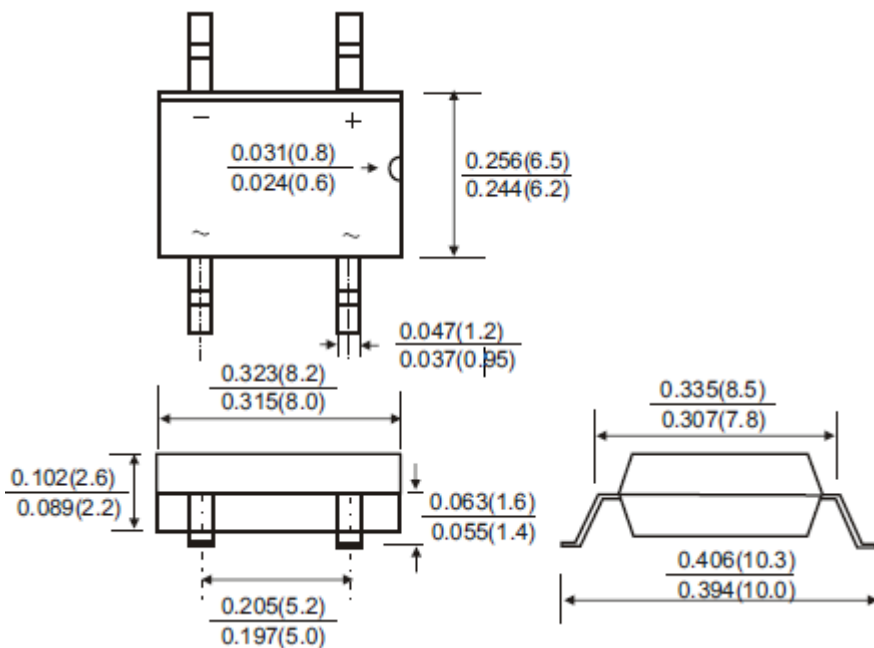DBS Package Outline (Dimensions in inches and (millimeters))



Packaging Information

Part Number	Component Package	Quantity
DB201S~DB207S	DBS	3000 PCS