

## 2 Ampere Surface Mount Schottky Barrier Rectifier




K22-K220

## Features:

- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- Fast switching for high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters

SOD-123FL



1.Cathode 2. Anode

## Absolute Maximum Ratings\* (TA=25°C Unless otherwise noted)







Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

| Parameter   | Symbols         | K22        | K24  | K26  | K28      | K210       | K212 | K215     | K220 | Units |
|---|-----------------|------------|------|------|----------|------------|------|----------|------|-------|
| Maximum Repetitive Peak Reverse Voltage   | $V_{RRM}$       | 20         | 40   | 60   | 80       | 100        | 120  | 150      | 200  | V     |
| Maximum RMS voltage   | $V_{RMS}$       | 14         | 28   | 42   | 56       | 70         | 84   | 105      | 140  | V     |
| Maximum DC Blocking Voltage   | $V_{DC}$        | 20         | 40   | 60   | 80       | 100        | 120  | 150      | 200  | V     |
| Maximum Average Forward Rectified Current   | $I_{F(AV)}$     | 2.0        |      |      |          |            |      |          |      | A     |
| Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)               | $I_{FSM}$       | 50         |      |      |          |            |      |          |      | A     |
| Max Instantaneous Forward Voltage at 2A   | $V_F$           | 0.55       | 0.70 | 0.85 |          |            | 0.95 |          |      | V     |
| Maximum DC Reverse Current at Rated DC Reverse Voltage<br>$T_a = 25^\circ\text{C}$<br>$T_a = 100^\circ\text{C}$ | $I_R$           | 0.3<br>10  |      |      | 0.2<br>5 |            |      | 0.1<br>2 |      | mA    |
| Typical Junction Capacitance <sup>(1)</sup>   | $C_j$           | 220        | 80   |      |          |            |      |          | pF   |       |
| Typical Thermal Resistance <sup>(2)</sup>   | $R_{\theta JA}$ | 85         |      |      |          |            |      |          |      | °C/W  |
| Operating Junction Temperature Range  | $T_j$           | -55 ~ +125 |      |      |          | -55 ~ +150 |      |          |      | °C    |
| Storage Temperature Range   | $T_{stg}$       | -55 ~ +150 |      |      |          |            |      |          |      | °C    |

(1) Measured at 1 MHz and applied reverse voltage of 4 VD.C

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.


Typical Characteristics

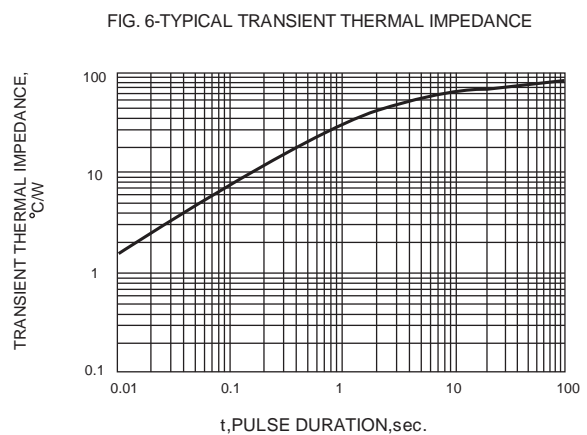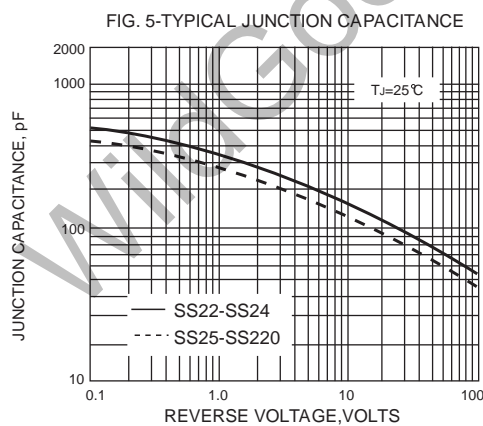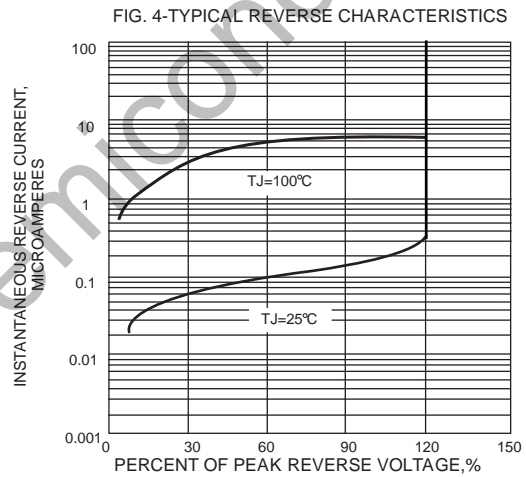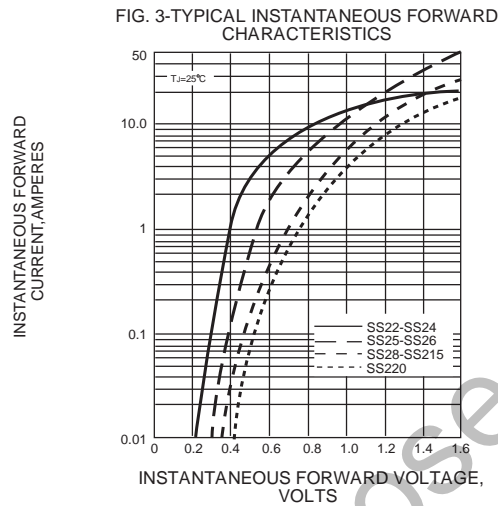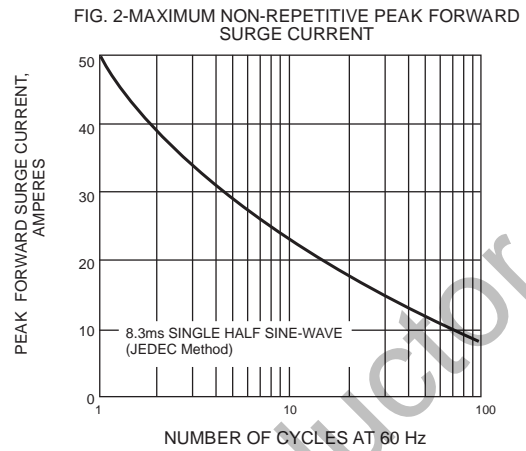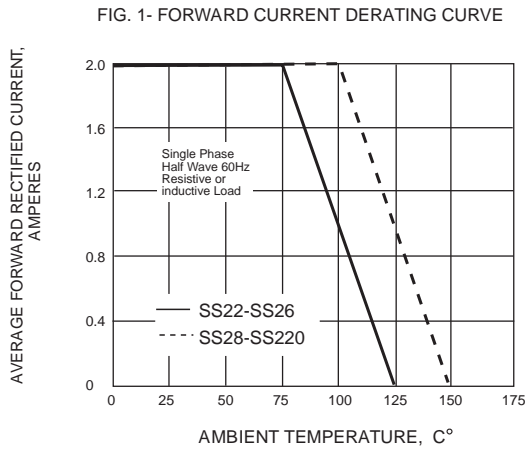

**Package Dimension**

## SOD-123FL

Unit: mm

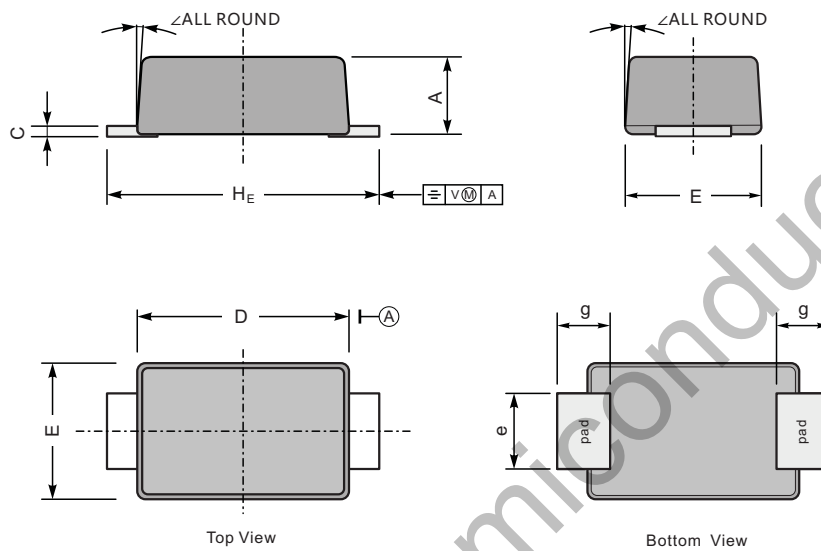

| UNIT |     | A   | C    | D   | E   | e   | g   | H <sub>E</sub> | ∠  |
|------|-----|-----|------|-----|-----|-----|-----|----------------|----|
| mm   | max | 1.1 | 0.20 | 2.9 | 1.9 | 1.1 | 0.9 | 3.8            | 7° |
|      | min | 0.9 | 0.12 | 2.6 | 1.7 | 0.8 | 0.7 | 3.5            |    |
| mil  | max | 43  | 7.9  | 114 | 75  | 43  | 35  | 150            |    |
|      | min | 35  | 4.7  | 102 | 67  | 31  | 28  | 138            |    |

**The recommended mounting pad size**